

# M series


**Variable cable carrier  
with extensive accessories  
and stay variants**



Trademarks are legally protected for the TSUBAKI KABELSCHLEPP GmbH  
as a national or international registration in the following countries:  
[tsubaki-kabelschlepp.com/trademarks](http://tsubaki-kabelschlepp.com/trademarks)

Subject to change without notice




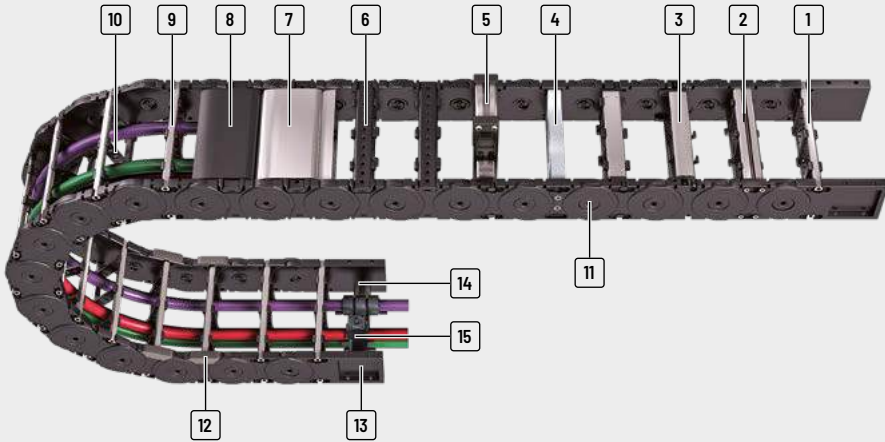

- |  |  |  |                                      |
|--|--|--|--------------------------------------|
| 1 Aluminum stays available in <b>1 mm width sections</b> | 5 Mounting frame stays   | 8 Plastic cover available in <b>8 or 16 mm width sections</b>          | 12 Replaceable glide shoes           |
| 2 4-fold bolted aluminum stays for extreme loads         | 6 Plastic stays available in <b>4, 8 or 16 mm width sections</b> | 9 Can be opened quickly on the inside and the outside for cable laying | 13 Universal end connectors (UMB)    |
| 3 Aluminum stays with ball joint                         | 7 Aluminum cover available in <b>1 mm width sections</b>         | 10 Fixable dividers  | 14 C-rail for strain relief elements |
| 4 Aluminum hole stays                                    |  | 11 Locking bolts   | 15 Strain relief combs               |

## Features

- » Encapsulated, dirt-resistant stroke system
- » Durable sidebands through robust link plate design
- » Easy assembly of side bands through bars with easy-to-assemble locking bolts
- » Long service life due to minimized hinge wear owing to the "life extending 2 disc principle"
- » Large selection of vertical and horizontal stay systems and dividing options for your cables
- » Versions with aluminum stays in 1 mm width sections up to 800 mm inner width
- » Versions with plastic stays available in 4, 8 or 16 mm width sections

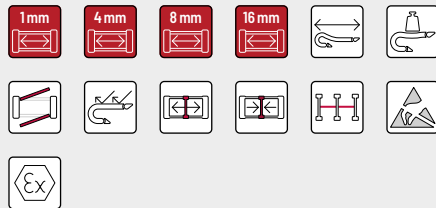

Minimized hinge wear owing to the "life extending 2 disc principle"



Sturdy link plate design, encapsulated stroke system



Easy to assemble through locking bolts








Replaceable glide shoes for long service life for gliding applications



Type	Opening variant	Stay variant	$h_i$ [mm]	$h_G$ [mm]	$B_i$ [mm]	$B_k$ [mm]	$B_i$ - grid [mm]	t [mm]	KR [mm]	Additional load ≤ [kg/m]	Cable- d <sub>max</sub> [mm]
M0320											
		RS 01	19	27.5	25 - 280	36 - 291	1	32	37 - 200	2.5	15
		RS 02	19	27.5	25 - 280	36 - 291	1	32	37 - 200	2.5	15
		RE	19	27.5	25 - 189	36 - 200	4	32	37 - 200	2.5	15
M0475											
		RD 01	28	39	24 - 280	41 - 297	8	47.5	55 - 300	3.0	22
		RD 02	28	39	24 - 280	41 - 297	8	47.5	55 - 300	3.0	22
M0650											
		RS	38	57	75 - 400	109 - 434	1	65	75 - 350	25	30
		LG	36	57	75 - 600	109 - 634	1	65	75 - 350	25	29
		RMAI	38 (200)	57 (224)	200 - 400	234 - 434	1	65	220 - 350	25	30 (160)
		RMAO	38 (200)	57 (224)	200 - 400	234 - 434	1	65	75 - 350	25	30 (160)
		RE	42	57	50 - 266	84 - 300	8	65	75 - 350	25	33
		RD	42	57	50 - 266	84 - 300	8	65	75 - 350	25	33
M0950											
		RS	58	80	75 - 400	114 - 439	1	95	140 - 380	35	46
		RV	58	80	75 - 500	114 - 539	1	95	140 - 380	35	46
		RM	54	80	75 - 600	114 - 639	1	95	140 - 380	35	43
		LG	50	80	75 - 600	114 - 639	1	95	140 - 380	35	38
		RMAI	58 (200)	80 (224)	200 - 500	239 - 539	1	95	170 - 380	35	46 (160)
		RMAO	58 (200)	80 (224)	200 - 500	239 - 539	1	95	140 - 380	35	46 (160)
		RMR	51	80	75 - 600	114 - 639	1	95	140 - 380	35	46
		RE	58	80	45 - 557	84 - 596	16	95	140 - 380	35	46
		RD	58	80	45 - 557	84 - 596	16	95	140 - 380	35	46



Unsupported arrangement			Gliding arrangement			Inner Distribution				Movement			Page
Travel length ≤ [m]	$v_{max}$ ≤ [m/s]	$a_{max}$ ≤ [m/s <sup>2</sup> ]	Travel length ≤ [m]	$v_{max}$ ≤ [m/s]	$a_{max}$ ≤ [m/s <sup>2</sup> ]	TS0	TS1	TS2	TS3	vertical hanging or standing	lying on the side	rotating arrangement	
													
2.8	10	50	80	2.5	25	•	•	-	-	•	•	•	366
2.8	10	50	80	2.5	25	•	•	-	-	•	•	•	366
2.8	10	50	80	2.5	25	•	•	-	-	•	•	•	368
2.7	10	50	-	-	-	•	•	•	-	•	•	•	374
2.7	10	50	-	-	-	•	•	•	-	•	•	•	376
4.8	10	40	220	8	20	•	•	•	•	•	•	•	384
4.8	10	40	220	8	20	-	-	-	-	•	•	•	388
4.8	10	40	220	8	20	•	-	-	-	•	•	-	390
4.8	10	40	220	8	20	•	-	-	-	•	•	-	392
4.8	10	40	220	8	20	•	•	-	•	•	•	•	394
4.8	10	40	220	8	20	•	•	-	•	•	•	•	395
7.4	10	30	260	8	20	•	•	•	•	•	•	•	404
7.4	10	30	260	8	20	•	•	•	•	•	-	•	408
7.4	10	30	260	8	20	•	•	•	-	•	•	•	412
7.4	10	30	260	8	20	-	-	-	-	•	•	•	414
7.4	10	30	260	8	20	•	-	-	-	•	•	-	416
7.4	10	30	260	8	20	•	-	-	-	•	•	-	418
7.4	10	30	260	8	20	•	-	-	-	•	•	•	420
7.4	10	30	260	8	20	•	•	•	•	•	•	•	422
7.4	10	30	260	8	20	•	•	•	•	•	•	•	423

Subject to change without notice.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



Type	Opening variant	Stay variant	$h_i$ [mm]	$h_G$ [mm]	$B_i$ [mm]	$B_k$ [mm]	$B_i$ - grid [mm]	t [mm]	KR [mm]	Additional load ≤ [kg/m]	Cable- d <sub>max</sub> [mm]

M1250











		RS	72	96	75 - 400	120 - 445	1	125	180 - 500	65	61
		RV	72	96	100 - 600	145 - 645	1	125	180 - 500	65	61
		RM	69	96	100 - 800	145 - 845	1	125	180 - 500	65	59
		LG	76	96	100 - 800	145 - 845	1	125	180 - 500	65	59
		RMAI	72 (200)	96 (226)	200 - 800	245 - 845	1	125	180 - 500	65	61 (160)
		RMAO	72 (200)	96 (226)	200 - 800	245 - 845	1	125	180 - 500	65	61 (160)
		RMR	66	96	100 - 800	145 - 845	1	125	180 - 500	65	54
		RE	72	96	71 - 551	116 - 596	16	125	180 - 500	65	61
		RD	72	96	71 - 551	116 - 596	16	125	180 - 500	65	61

M1300

		RMF	87	120	100 - 800	150 - 850	1	130	150 - 500	70	75
		RMS	87	120	100 - 800	150 - 850	1	130	150 - 500	70	75
		LG	98	120	100 - 800	150 - 850	1	130	150 - 500	70	74

\* Further information on request.



Unsupported arrangement			Gliding arrangement			Inner Distribution				Movement			Page
Travel length ≤ [m]	$v_{max}$ ≤ [m/s]	$a_{max}$ ≤ [m/s <sup>2</sup> ]	Travel length ≤ [m]	$v_{max}$ ≤ [m/s]	$a_{max}$ ≤ [m/s <sup>2</sup> ]	TS0	TS1	TS2	TS3	vertical hanging or standing	lying on the side	rotating arrangement	
													
9.7	10	25	320	8	20	•	•	-	•	•	•	•	432
9.7	10	25	320	8	20	•	•	•	•	•	-	•	436
9.7	10	25	320	8	20	•	•	•	-	•	•	•	440
9.7	10	25	320	8	20	-	-	-	-	•	•	•	442
9.7	10	25	320	8	20	•	-	-	-	•	•	-	444
9.7	10	25	320	8	20	•	-	-	-	•	•	-	446
9.7	10	25	320	8	20	•	-	-	-	•	•	•	448
9.7	10	25	320	8	20	•	•	•	•	•	•	•	450
9.7	10	25	320	8	20	•	•	•	•	•	•	•	451
10.8	10	25	350	8	20	•	•	-	•	-	-	-	458
10.8	10	25	350	8	20	•	•	-	•	•	•	•	460
10.8	10	25	350	8	20	-	-	-	-	•	•	•	462

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series


TKR  
series

TKA  
series

UAT  
series



# M0320



**Pitch**  
32 mm



**Inner height**  
19 mm



**Inner widths**  
25 – 280 mm



**Bending radii**  
37 – 200 mm

## Stay variants



**Aluminum stay 01** ..... page 366

### Frame stay detachable inside

- » Aluminum profile bars for light to medium loads.  
Assembly without screws.
- » **Inside:** release by turning by 90°.



**Aluminum stay 02** ..... page 366

### Frame stay detachable outside "the standard"

- » Aluminum profile bars for light to medium loads.  
Assembly without screws.
- » **Outside:** release by turning by 90°.



**Plastic stay RE** ..... page 368

### Frame screw-in stay

- » Plastic profile bars for light to medium loads.  
Assembly without screws.
- » **Inside/outside:** release by turning by 90°.

## More product information online




Assembly instructions etc.:  
Additional info via your  
smartphone or check online at  
[tsubaki-kabelschlepp.com/  
downloads](http://tsubaki-kabelschlepp.com/downloads)



Configure your custom  
cable carrier here:  
[online-engineer.de](http://online-engineer.de)



Unsupported arrangement

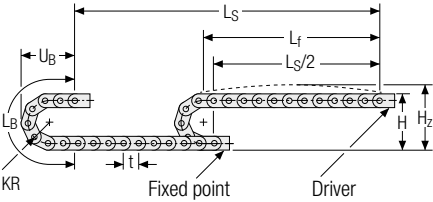


KR [mm]	H [mm]	H <sub>z</sub> [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
37	101.5	121.5	181	83
47	121.5	141.5	212	93
77	181.5	201.5	306	123
100	227.5	247.5	379	146
200	427.5	427.5	693	246

**Load diagram for unsupported length** depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight  $q_k = 0.54 \text{ kg/m}$ . For other inner widths, the maximum additional load changes.

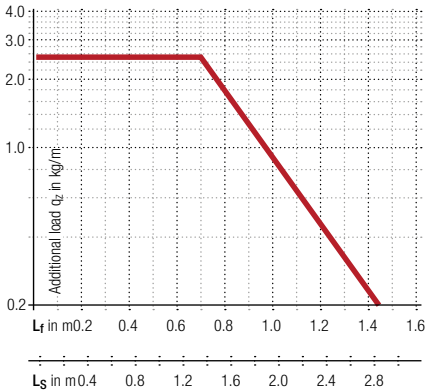

**Speed**  
up to 10 m/s



**Acceleration**  
up to 50 m/s<sup>2</sup>




**Travel length**  
up to 2.8 m



**Additional load**  
up to 2.5 kg/m

Gliding arrangement

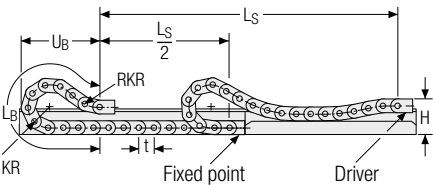

**Speed**  
up to 2.5 m/s



**Acceleration**  
up to 25 m/s<sup>2</sup>



**Travel length**  
up to 80 m



**Additional load**  
up to 2.5 kg/m



The gliding cable carrier must be guided in a channel. See p. 866.



Our technical support can provide help for gliding arrangements:  
[technik@kabelschlepp.de](mailto:technik@kabelschlepp.de)

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series


TKA  
series

UAT  
series



## Aluminum stay 01/02 – frame stay detachable outside

- Extremely quick to open and close
- Aluminum profile bars for light to medium loads.  
Assembly without screws.
- Available customized in **1 mm grid**.
- **Outside/inside:** release by turning by 90°.

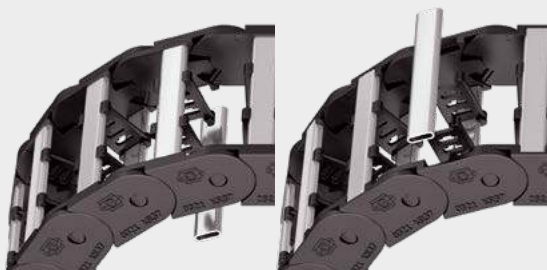


Stay arrangement on each chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 25 – 280 mm  
in 1 mm width sections

## Aluminum stay 01 frame stay detachable inside

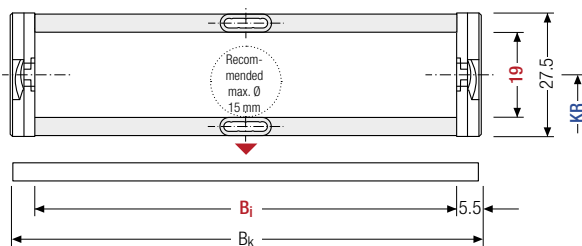

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.


### Calculating the cable carrier length

**Cable carrier length L<sub>k</sub>**

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

## Aluminum stay 02 frame stay detachable outside

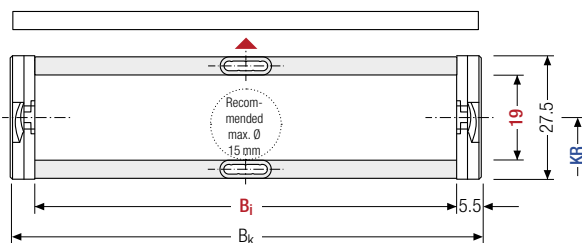

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	B <sub>i</sub> [mm]*	B <sub>k</sub> [mm]	KR [mm]				q <sub>k</sub> [kg/m]
19	27.5	25 – 280	B <sub>i</sub> + 11	37	47	77	100 200	0.47 – 1.70

\* in 1 mm width sections

### Order example



**MC0320**

Type

**200**

B<sub>i</sub> [mm]

**01**

Stay variant

**100**

KR [mm]

**1152**

L<sub>k</sub> [mm]

**VS**

Stay arrangement



Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).

As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

Divider system TS0 without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	3	6	4	2


The dividers can be moved in the cross section.

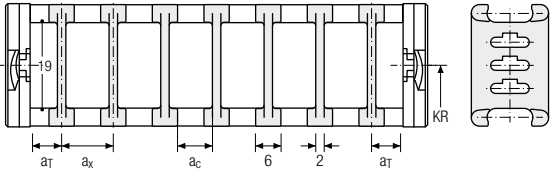


Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	3	20	6	4	2

The dividers can be moved in the cross section.

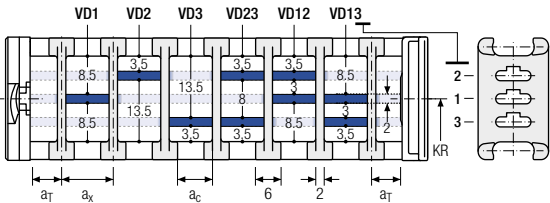

Order example



TS1

A

3

VD1

⋮

VD3

Divider system

Version

n<sub>T</sub>

Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>].

If using divider systems with height separation (**TS1**) please also state the positions [e.g. VD1] viewed from the left driver belt. You are welcome to add a sketch to your order.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



Plastic stay RE –  
screw-in frame stay


- Plastic profile bars for light to medium loads.  
Assembly without screws.
- Available customized in **4 mm grid**.
- **Outside/inside:** release by turning by 90°.



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**4 mm** B<sub>i</sub> 25 – 189 mm  
in **4 mm** width sections

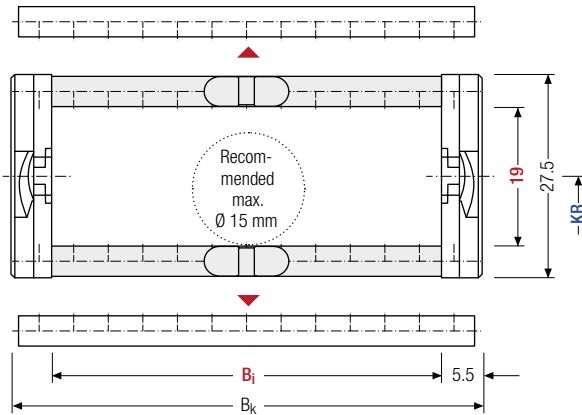

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the  
cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

$h_i$ [mm]	$h_g$ [mm]	$B_i$ [mm]										$B_k$ [mm]	$KR$ [mm]	$q_k$ [kg/m]	
19	27.5	25	29	33	37	41	45	49	53	57	61	65	37	47	0.46
		69	73	77	81	85	89	93	97	101	105	109	77	100	—
		113	117	121	125	129	133	137	141	145	149		200		1.00

For B<sub>i</sub> > 149 mm we recommend a multi-band chain.

Order example



ME0320 Type	105 B <sub>i</sub> [mm]	RE Stay variant	100 KR [mm]	1152 L <sub>k</sub> [mm]	VS Stay arrangement
----------------	----------------------------	--------------------	----------------	-----------------------------	------------------------



Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).  
As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

The dividers are easily attached to the stay for applications with lateral acceleration and for applications laying on their side by simply turning the frame stay by 180°. The arresting cams click into place in the locking grids in the crossbars (**version B**).  
The groove in the frame stay faces outwards.

Divider system TSO without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	3	6	4	–	–
B	4.5	8	6	4	–


The dividers can be moved in the cross section.

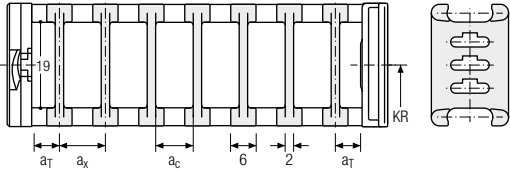


Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	3	20	6	4	–	2
B	4.5	20.5	8	6	4	2

The dividers can be moved in the cross section.

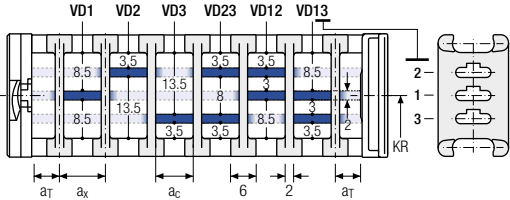

Order example



TS1

A

3

VD1

⋮

VD3

Divider system

Version

n<sub>T</sub>

Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>].  
If using divider systems with height separation (**TS1**), please also state the positions [e.g. VD1] viewed from the left driver belt. You are welcome to add a sketch to your order.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series


TKA  
series

UAT  
series




One part end connectors – plastic/aluminum (with integrated strain relief)

The plastic/aluminum end connectors can be **connected from above or below**. The connection variants on the fixed point and on the driver can be combined and, if required, changed afterwards.

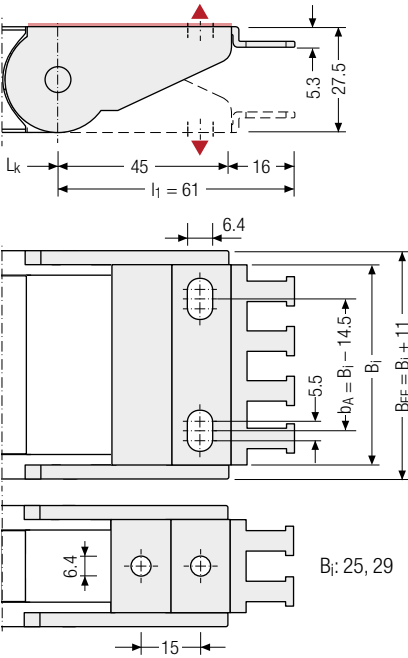


One-part end connectors – plastic/aluminum

The plastic/aluminum end connectors can be **connected from above or below**. The connection variants on the fixed point and on the driver can be combined and, if required, changed afterwards.

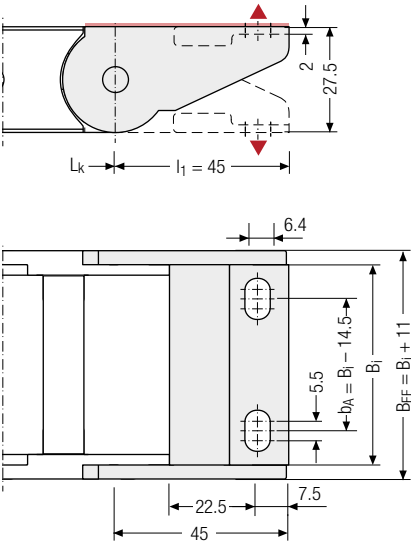

▲ Assembly options

$B_i$ [mm]	$n_z$	$B_i$ [mm]	$n_z$	$B_i$ [mm]	$n_z$	$B_i$ [mm]	$n_z$
25	2	39	4	89	7	149	11
29	2	49	4	109	8		
37	3	69	5	124	10		



Connection point

F – fixed point  
M – driver

Connection type

A – threaded joint outside (standard)  
I – threaded joint inside  
H – threaded joint, rotated 90° to the outside  
K – threaded joint, rotated 90° to the inside

Order example



Plastic/aluminum	F	A
Plastic/aluminum	M	A
End connector	Connection point	Connection type



We recommend the use of strain reliefs at the driver and fixed point. See from p. 926.





Subject to change without notice.

UAT  
series

TKA  
series

TKR  
series

QUANTUM®  
series

XL  
series

TKHP  
series

**M**  
series

UNIFLEX  
Advanced  
series

K  
series

PROTUM®  
series



# M0475



**Pitch**  
47.5 mm



**Inner height**  
28 mm



**Inner widths**  
24 - 280 mm



**Bending radii**  
55 - 300 mm

## Stay variants



**Plastic stay RD 01** ..... page 374

### Frame stay with hinge in the inner radius

- » Plastic profile bars with hinge for light to medium loads.  
Assembly without screws.
- » **Outside:** release by turning by 90°.
- » **Inside:** swivable to both sides.



**Plastic stay RD 02** ..... page 376

### Frame stay with hinge in the outer radius

- » Plastic profile bars with hinge for light to medium loads.  
Assembly without screws.
- » **Outside:** swivable to both sides.
- » **Inside:** release by turning by 90°.



### MT series

Also available as covered variants with cover system.  
More information can be found  
in chapter "MT series" from p. 628.

## More product information online




Assembly instructions etc.:  
Additional info via your smartphone  
or check online at  
[tsubaki-kabelschlepp.com/  
downloads](http://tsubaki-kabelschlepp.com/downloads)



Configure your custom  
cable carrier here:  
[online-engineer.de](http://online-engineer.de)



Unsupported arrangement

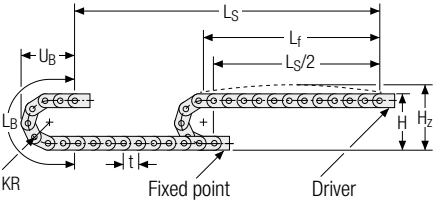

**Load diagram for unsupported length** depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight  $q_k = 1.7 \text{ kg/m}$ . For other inner widths, the maximum additional load changes.



**Speed**  
up to 10 m/s



**Acceleration**  
up to 50 m/s<sup>2</sup>




**Travel length**  
up to 2.7 m



**Additional load**  
up to 3.0 kg/m

KR [mm]	H [mm]	H <sub>z</sub> [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
55	149	174	268	122
75	189	214	331	142
100	239	264	410	167
130	299	324	504	197
160	359	384	598	227
200	439	464	724	267
250	539	564	881	317
300	639	664	1038	367

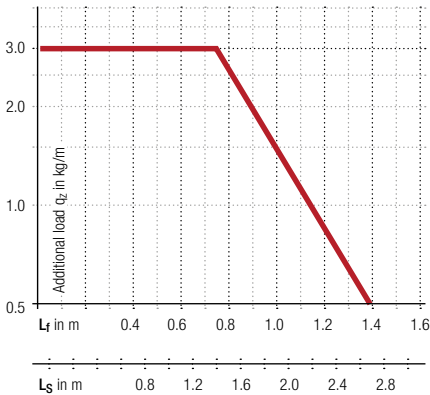

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



Plastic stay RD 01 – frame stay with hinge in the inner radius


- Plastic profile bars with hinge for light to medium loads. Assembly without screws.
- Available customized in **8 mm grid**.
- **Outside:** release by turning by 90°.
- **Inside:** swivable to both sides.




Stay arrangement on every chain link (**VS: fully-stayed**)



**8 mm** B<sub>i</sub> 24 – 280 mm in 8 mm width sections

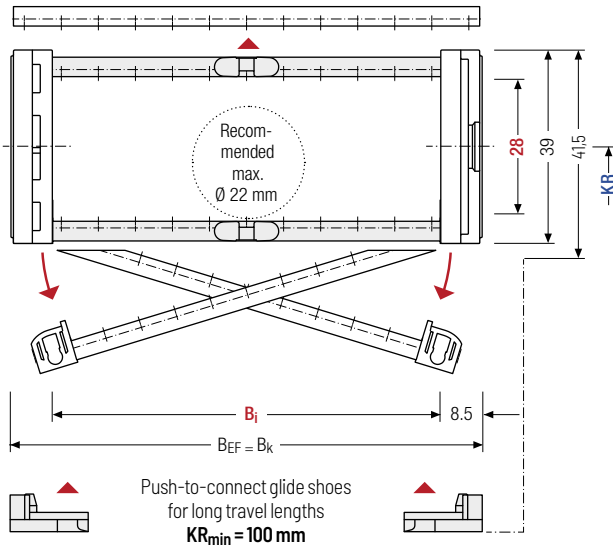

 The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub> rounded to pitch t

h <sub>i</sub> [mm]	h <sub>g</sub> [mm]	B <sub>i</sub> [mm]									B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]	q <sub>k</sub> [kg/m]	
28	39	24	32	40	48	56	64	72	80	88	B <sub>i</sub> + 17	B <sub>i</sub> + 17	55	75	0.79
		96	104	112	120	128	136	144	152	160			100	130	
		168	176	184	192	200	208	216	224	232			160	200	3.03
		240	248	256	264	272	280						250	300	

Order example



MK0475  
Type

•

128  
B<sub>i</sub> [mm]

•

RD 01  
Stay variant

•

100  
KR [mm]

•

1425  
L<sub>k</sub> [mm]

•

VS  
Stay arrangement



Divider systems

As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).


As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

The dividers are easily attached to the stay for applications with lateral acceleration and for applications laying on their side by simply turning the frame stay by 180°. The arresting cams click into place in the locking grids in the crossbars (**version B**). The groove in the frame stay faces outwards.

Divider system TS0 without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	6	7.8	5	–	–
B	12	8	5.2	8	–


The dividers can be moved within the cross section (version A) or fixed (version B).

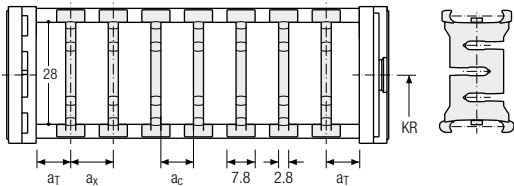

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	6	20	7.8	5	–	2
B	12	20	8	5.2	8	2

The dividers can be moved within the cross section (version A) or fixed (version B).

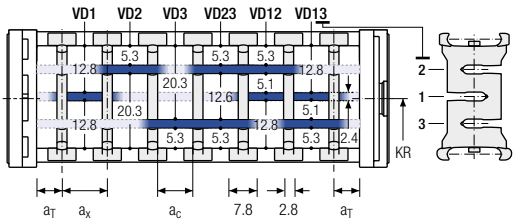


Divider system TS2 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
B	12	8*/24	5.2*/21.2	8	2

\* for VR0

With grid distribution (8 mm grid). The dividers are fixed by the height separation, the complete divider system is movable in the cross section (version A) or fixed (version B).

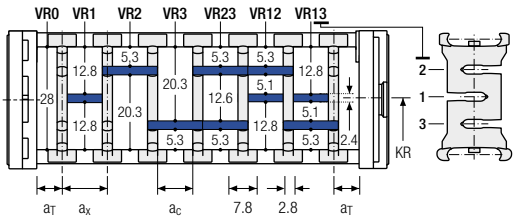

Order example



TS2	A	3	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n <sub>T</sub>	Chamber	a <sub>x</sub>	Height separation

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKiP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



Plastic stay RD 02 – frame stay with hinge in the outer radius


- Plastic profile bars with hinge for light to medium loads. Assembly without screws.
- Available customized in **8 mm grid**.
- **Outside:** swivable to both sides.  
**Inside:** release by turning by 90°.



Stay arrangement on every chain link (**VS: fully-stayed**)



**8 mm** B<sub>i</sub> 24 – 280 mm in 8 mm width sections

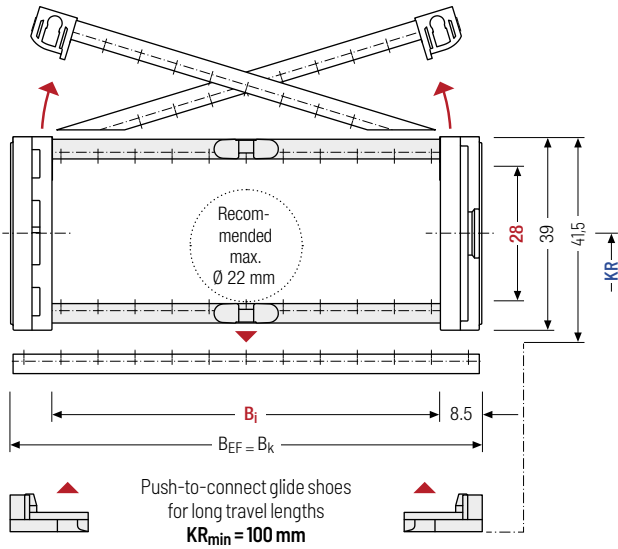

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub> rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	B <sub>i</sub> [mm]									B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]	q <sub>k</sub> [kg/m]	
28	39	24	32	40	48	56	64	72	80	88	B <sub>i</sub> + 17	B <sub>i</sub> + 17	55	75	0.79
		96	104	112	120	128	136	144	152	160			100	130	
		168	176	184	192	200	208	216	224	232			160	200	3.03
		240	248	256	264	272	280						250	300	

Order example



MK0475

Type

·

128

B<sub>i</sub> [mm]

·

RD 02

Stay variant

·

100

KR [mm]

·

1425

L<sub>k</sub> [mm]

·

VS

Stay arrangement



Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).  
As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

The dividers are easily attached to the stay for applications with lateral acceleration and for applications laying on their side by simply turning the frame stay by 180°. The arresting cams click into place in the locking grids in the crossbars (**version B**).  
The groove in the frame stay faces outwards.

Divider system TS0 without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	6	7.8	5	–	–
B	12	8	5.2	8	–


The dividers can be moved within the cross section (version A) or fixed (version B).

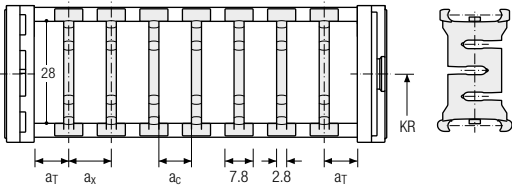

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	6	20	7.8	5	–	2
B	12	20	8	5.2	8	2

The dividers can be moved within the cross section (version A) or fixed (version B).

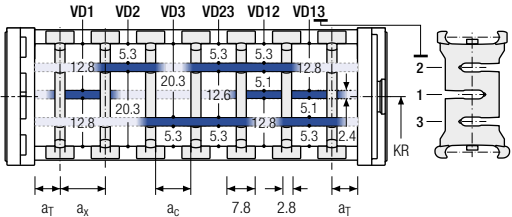


Divider system TS2 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
B	12	8*/24	5.2*/21.2	8	2

\* for VR0

With grid distribution (8 mm grid). The dividers are fixed by the height separation, the complete divider system is movable in the cross section (version A) or fixed (version B).

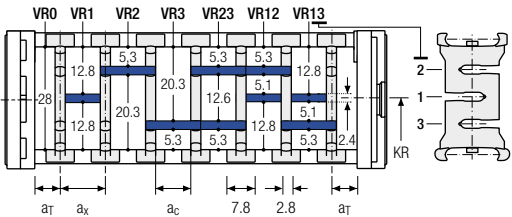

Order example



TS2	A	3	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n <sub>T</sub>	Chamber	a <sub>x</sub>	Height separation

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKiP  
series

XL  
series

QUANTUM®  
series

TKR  
series



TKA  
series

UAT  
series




End connectors – plastic/steel (with strain relief)

Link end connector made of plastic, end connector made of sheet steel with screw-fixed aluminum strain relief. The connection variants on the fixed point and on the driver can be combined and, if required, changed afterwards.

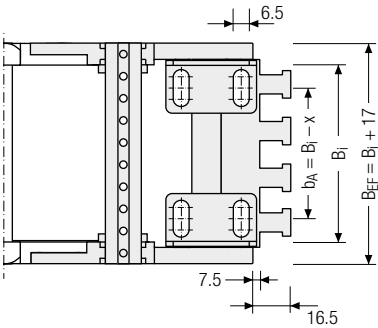

▲ Assembly options

$B_i$ [mm]	$x$ [mm]	$n_z$
40	17.5	3
56	21.5	4
80	17.5	6
104	19.0	8
128	19.5	9
152	17.5	11
192	18.5	14



**Connection point**  
**F** – fixed point  
**M** – driver

**Connection surface**  
**I** – connection surface inside

**Connection type**  
**A** – threaded joint outside (standard)  
**I** – threaded joint inside


Order example

Plastic/steel	.	F	A	I
Plastic/steel	.	M	A	I
End connector		Connection point	Connection type	Connection surface






End connectors – plastic/steel

Plastic link end connector, steel end connector. The connection variants on the fixed point and on the driver can be combined and, if required, changed afterwards.

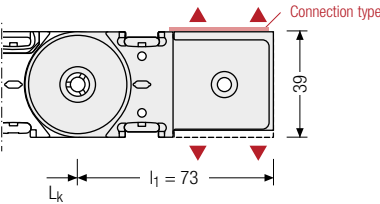

▲ Assembly options

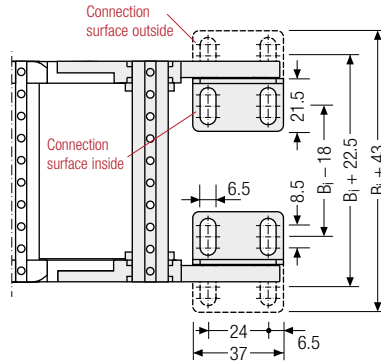

Connection point

F – fixed point  
M – driver

Connection surface

I – connection surface inside  
A – connection surface outside

Connection type

A – threaded joint outside (standard)  
I – threaded joint inside  
F – flange connection

Order example



Plastic/steel	F	A	A
Plastic/steel	M	A	I
End connector	Connection point	Connection type	Connection surface



We recommend the use of strain reliefs at the driver and fixed point. See from p. 926.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKUP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



# M0650



**Pitch**  
65 mm



**Inner heights**  
36 – 42 mm



**Inner widths**  
50 – 600 mm



**Bending radii**  
75 – 350 mm


## Stay variants



**Aluminum stay RS** ..... page **384**

### Frame stay, narrow "The standard"

- » Aluminum profile bars for light to medium loads.  
Assembly without screws.
- » **Outside/inside:** release by turning by 90°.



**Aluminum stay LG** ..... page **388**

### Hole stay, split version

- » Optimum cable routing in the neutral bending line.  
Split version for easy cable routing. Stays also available unsplit.
- » **Outside/inside:** Screw-fixing easy to release.



**Aluminum stay RMAI** ..... page **390**

### Mounting frame stay

- » Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- » **Inside:** Screw-fixing easy to release.



**Aluminum stay RMAO** ..... page **392**

### Mounting frame stay

- » Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- » **Outside:** Screw-fixing easy to release.



**Plastic stay RE** ..... page **394**

### Frame screw-in stay

- » Plastic profile bars for light to medium loads. Assembly without screws.
- » **Outside/inside:** release by turning by 90°.



## Stay variants



### Plastic stay RD ..... page 395

#### Frame stay with hinge

- » Plastic profile bars with hinge for light to medium loads.  
Assembly without screws.
- » **Outside:** swivable to both sides.
- » **Inside:** release by turning by 90°.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

**M**  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series




### MT series

Also available as covered variants with cover system.  
More information can be found in chapter "MT series" from p. 628.



### TOTALTRAX® complete systems

Benefit from the advantages of the TOTALTRAX® complete system.  
A complete delivery from one source – with a warranty certificate  
on request! Learn more at [tsubaki-kabelschlepp.com/totaltrax](http://tsubaki-kabelschlepp.com/totaltrax)



### TRAXLINE® cables for cable carriers

Hi-flex electric cables which were especially developed, optimized  
and tested for use in cable carriers can be found at  
[tsubaki-kabelschlepp.com/traxline](http://tsubaki-kabelschlepp.com/traxline)




UAT series	TKA series	TKR series	QUANTUM® series	XL series	TKIP series	M series	UNIFLEX Advanced series	K series	PROTUM® series
------------	------------	------------	-----------------	-----------	-------------	----------	-------------------------	----------	----------------





Unsupported arrangement

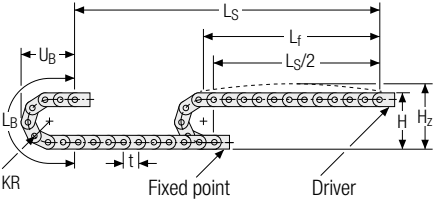

**Load diagram for unsupported length** depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight  $q_k = 2.4 \text{ kg/m}$ . For other inner widths, the maximum additional load changes.



**Speed**  
up to 10 m/s



**Acceleration**  
up to 40 m/s<sup>2</sup>




**Travel length**  
up to 4.8 m




**Additional load**  
up to 25 kg/m

KR [mm]	H [mm]	H <sub>z</sub> [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
75	207	242	366	169
95	247	282	429	189
115	287	322	492	209
145	347	382	586	239
175	407	442	680	269
220	497	532	822	314
260	577	612	948	354
275	607	642	994	369
300	657	692	1073	394
350	757	792	1230	444

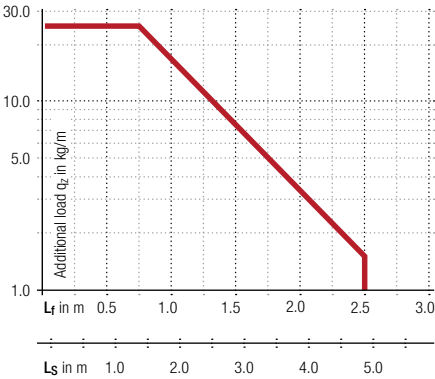

Gliding arrangement | GO module with chain links optimized for gliding

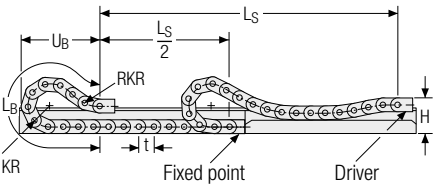

KR [mm]	H [mm]	GO module RKR [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
95	171	300	1180	560
115	171	300	1310	605
145	171	300	1440	640
175	171	300	1635	705
220	171	300	1950	810
260	171	300	2275	926
275	171	300	2405	973
300	171	300	2535	1014
350	171	300	2925	1152



**Speed**  
up to 8 m/s



**Acceleration**  
up to 20 m/s<sup>2</sup>



**Travel length**  
up to 220 m



**Additional load**  
up to 25 kg/m



The gliding cable carrier must be guided in a channel. See p. 866.


The GO module mounted on the driver is a defined sequence of 5 adapted KR/RKR link plates.

Glide shoes have to be used for gliding applications.



Aluminum stay RS –  
frame stay narrow

- Extremely quick to open and close
- Aluminum profile bars for light to medium loads.  
Assembly without screws.
- Available customized in **1 mm grid**.
- **Outside/inside:** release by turning by 90°.

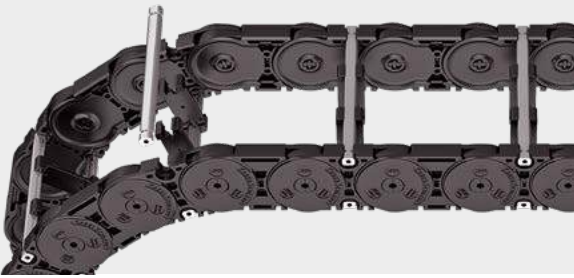


Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 75 – 400 mm  
in **1 mm width sections**

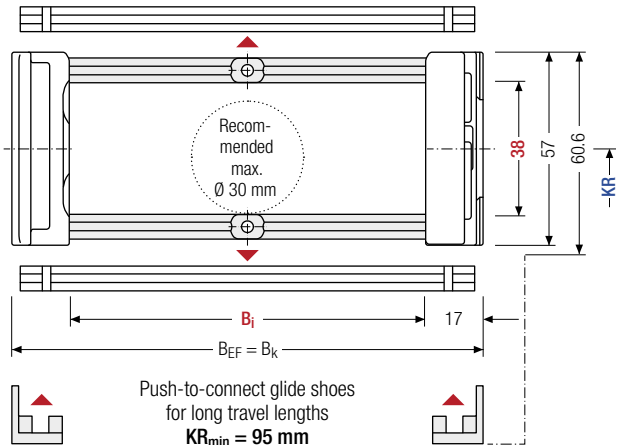

The maximum cable diam-  
eter strongly depends on  
the bending radius and the  
desired cable type.  
Please contact us.

For rough environmental  
conditions, we recommend  
the use of OFFROAD glide  
shoes with 80 % higher  
wear volume.

Calculating the  
cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G'</sub> [mm]	h <sub>G'</sub> Offroad [mm]	B <sub>i</sub> [mm]*	B <sub>K</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]					q <sub>k</sub> [kg/m]
38	57	60.6	62.2	75 – 400	B <sub>i</sub> + 34	B <sub>i</sub> + 34	75	95	115	145	175	1.98 – 3.85
							220	260	275	300	350	

\* in 1 mm width sections

Order example

MC0650  
Type

·

300  
B<sub>i</sub> [mm]

·

RS  
Stay variant

·

175  
KR [mm]

·

1430  
L<sub>k</sub> [mm]

·

HS  
Stay arrangement



Divider systems

As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).

As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).


For applications with lateral acceleration and rotated by 90°, the dividers can be attached by simply clipping on a socket (available as an accessory).

The bushing additionally serves as a spacer between the dividers and is available in 1 mm sections between 3 – 50 mm. The inner height is reduced to 32 mm (**version B**).

Divider system TS0 without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	6.5	13	10	2


The dividers can be moved in the cross section.

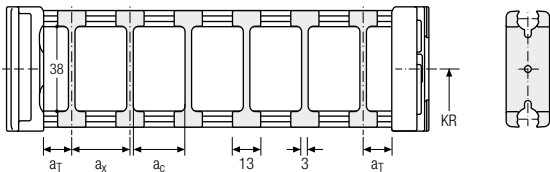

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	6.5	25	13	10	2

The dividers can be moved in the cross section.


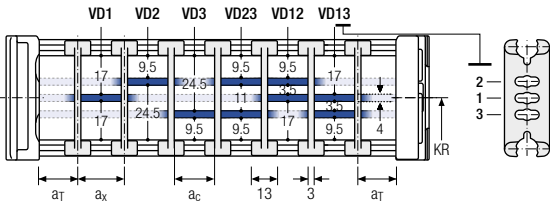


Divider system TS2 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	1.5	21	15	2

With grid distribution (1 mm grid).  
The dividers are attached by the height separation, the grid can be moved in the cross section.

Sliding dividers are optionally available (thickness of divider = 3 mm).

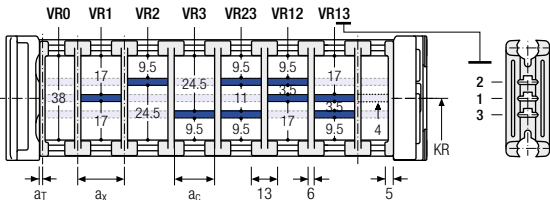

TRAXLINE® cables for cable carriers

Hi-flex electric cables which were especially developed, optimized and tested for use in cable carriers can be found at [tsubaki-kabelschlepp.com/traxline](http://tsubaki-kabelschlepp.com/traxline)

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKiP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series


UAT  
series




Divider system TS3 with height separation made of plastic partitions

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4	16 / 42*	8	2

\* For aluminum partitions

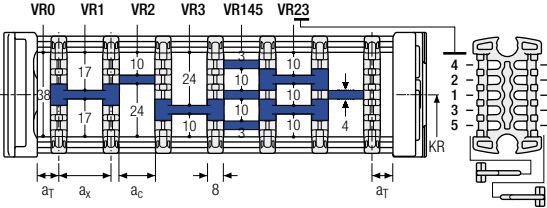

The dividers are fixed by the partitions, the complete divider system is movable in the cross section.




Aluminum partitions in 1 mm increments with **a<sub>x</sub> > 42 mm** are also available.

a <sub>x</sub> (center distance of dividers) [mm]												
a <sub>c</sub> (nominal width of inner chamber) [mm]												
16	18	23	28	32	33	38	43	48	58	64	68	
8	10	15	20	24	25	30	35	40	50	56	60	
78	80	88	96	112	128	144	160	176	192	208		
70	72	80	88	104	120	136	152	168	184	200		

When using **plastic partitions with a<sub>x</sub> > 112 mm**, we recommend an additional center support with a **twin divider** (S<sub>T</sub> = 3 mm). Twin dividers are also suitable for retrofitting in the partition system.

Order example



TS3

A

3

K1

34

VR1

⋮

⋮

⋮

K4

38

VR3

Divider system

Version

n<sub>T</sub>

Chamber

a<sub>x</sub>

Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1, TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.

More product information online



Assembly instructions etc.:  
Additional info via your  
smartphone or check online at  
[tsubaki-kabelschlepp.com/  
support](https://tsubaki-kabelschlepp.com/support)



Configure your custom  
cable carrier here:  
[online-engineer.de](https://online-engineer.de)







Aluminum stay LG –  
Hole stay, split version

- Optimum cable routing in the neutral bending line.  
Split version for easy cable routing. Stays also available unsplit.
- Available customized in **1 mm width sections**.
- **Outside/inside:** Screw-fixing easy to release.




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (VS: fully-stayed)



B<sub>i</sub> 75 – 600 mm  
in **1 mm width sections**

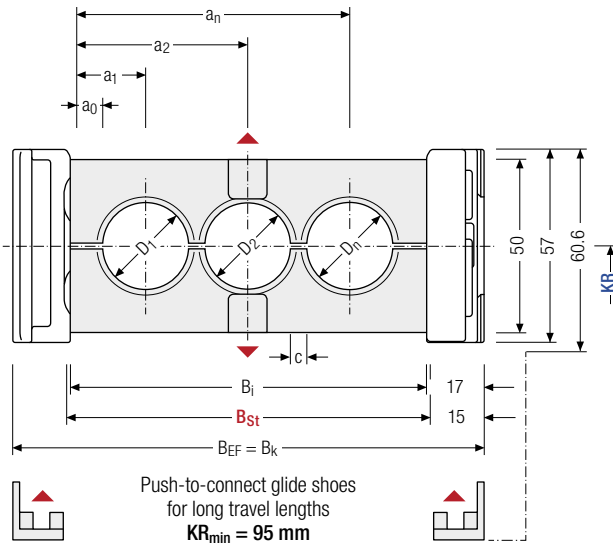

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable  
carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

Calculating  
the stay width

Stay width B<sub>St</sub>

$$B_{St} = \sum D + \sum c + 2 a_0$$

D <sub>max</sub> [mm]	D <sub>min</sub> [mm]	h <sub>G</sub> [mm]	B <sub>i</sub> [mm]	B <sub>St</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	C <sub>min</sub> [mm]	a <sub>0</sub> min [mm]	KR [mm]				q <sub>k</sub> 50 %** [kg/m]
36	9	57	75 – 600	79 – 604	B <sub>St</sub> + 30	B <sub>St</sub> + 30	4	10	75	95	115	145	2.39 – 4.66
									175	220	260	275	
									300	350			

\* in 1 mm width sections

\*\* Hole ratio of the hole stay approx. 50 %

Order example



MC0650

Type

300

B<sub>i</sub> [mm]

LG

Stay variant

175

KR [mm]


1430

L<sub>k</sub> [mm]

HS

Stay arrangement



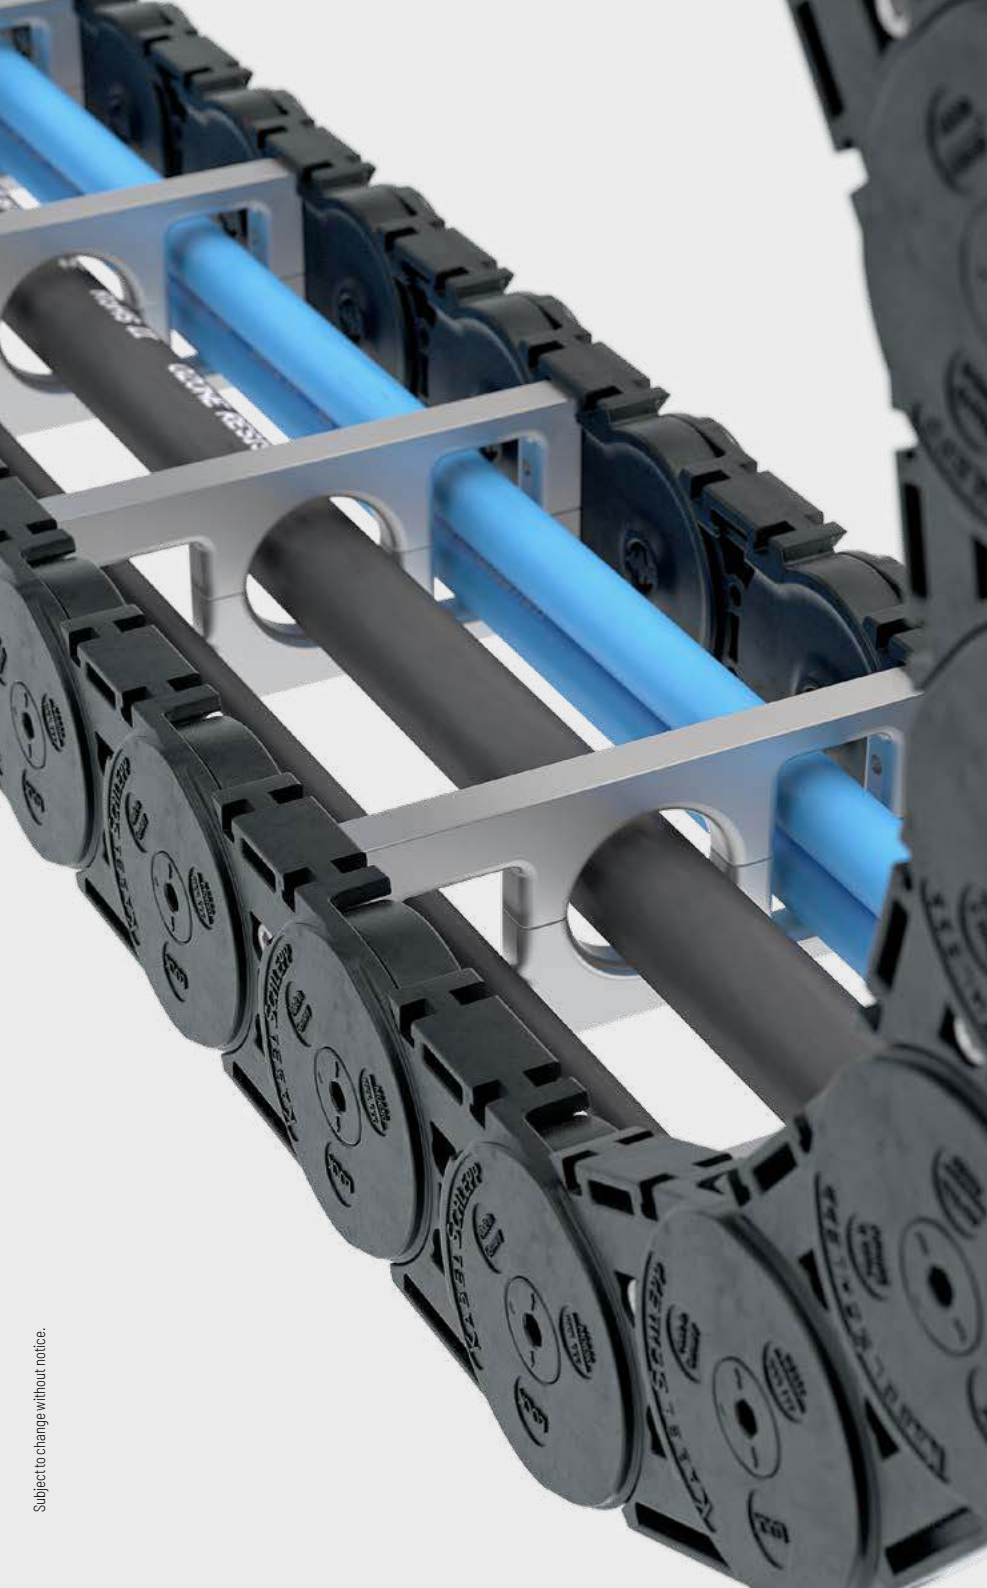

Subject to change without notice.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

**M**  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



Aluminum stay RMAI –  
mounting frame stay

- Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- The mounting frame stay is mounted on the inside in the bending radius.
- Available customized in **1 mm width sections**.
- **Inside:** Screw-fixing easy to release.




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(**HS:** half-stayed)



Stay arrangement on each  
chain link (**VS:** fully-stayed)



**B<sub>i</sub> 200 – 400 mm**  
in **1 mm width sections**

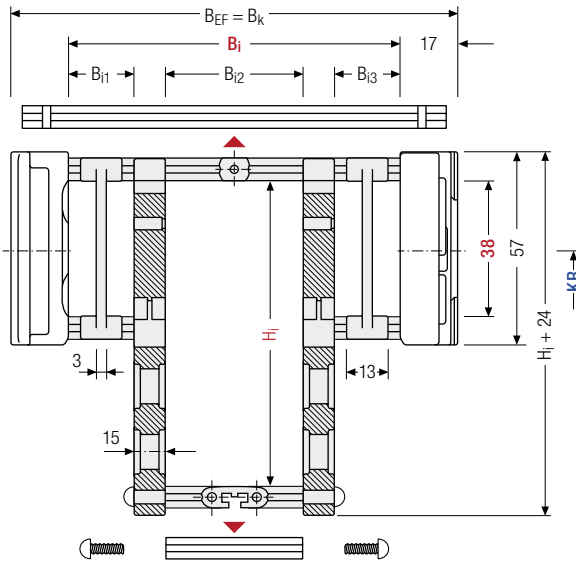

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable  
carrier length

Cable carrier length **L<sub>k</sub>**

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length **L<sub>k</sub>**  
rounded to pitch t



Intrinsic cable carrier  
weight

Determining the intrinsic cable carrier weight strongly depends on the selected stay arrangement. Please contact us.

<b>h<sub>i</sub></b> [mm]	<b>H<sub>i</sub></b> [mm]	<b>h<sub>G</sub></b> [mm]	<b>B<sub>i</sub></b> [mm]	<b>B<sub>i1</sub> min</b> [mm]	<b>B<sub>i3</sub> min</b> [mm]	<b>B<sub>k</sub></b> [mm]	<b>B<sub>EF</sub></b> [mm]	<b>KR</b> [mm]		
38	130 200	160	200 – 400	16	16	B <sub>i</sub> + 34	B <sub>i</sub> + 34	220 300	260 350	275

Order example



**MC0650**  
Type

**300**  
**B<sub>i</sub> [mm]**

**RMAI**  
Stay variant

**175**  
**KR [mm]**


**1430**  
**L<sub>k</sub> [mm]**

**HS**  
Stay arrangement



**RMAI – assembly to the inside:**  
Gliding application is not possible when using assembly version RMAI.

Observe minimum KR:  
H<sub>i</sub> = 130 mm: KR<sub>min</sub> = 220 mm  
H<sub>i</sub> = 160 mm: KR<sub>min</sub> = 300 mm  
H<sub>i</sub> = 200 mm: KR<sub>min</sub> = 300 mm



PROTUM® series
K series
UNIFLEX Advanced series
<b>M series</b>
TKIP series
XL series
QUANTUM® series
TKR series
TKA series
UAT series



**TOTALTRAX® complete systems**  
Benefit from the advantages of the TOTALTRAX® complete system. A complete delivery from one source – with a warranty certificate on request! Learn more at [tsubaki-kabelschlepp.com/totaltrax](https://tsubaki-kabelschlepp.com/totaltrax)



**TRAXLINE® cables for cable carriers**  
Hi-flex electric cables which were especially developed, optimized and tested for use in cable carriers can be found at [tsubaki-kabelschlepp.com/traxline](https://tsubaki-kabelschlepp.com/traxline)



Aluminum stay RMAO –  
mounting frame stay

- Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- The mounting frame stay is mounted on the outside in the bending radius.
- Available customized in **1 mm width sections**.
- **Outside:** Screw-fixing easy to release.




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



B<sub>i</sub> 200 – 400 mm  
in **1 mm width sections**

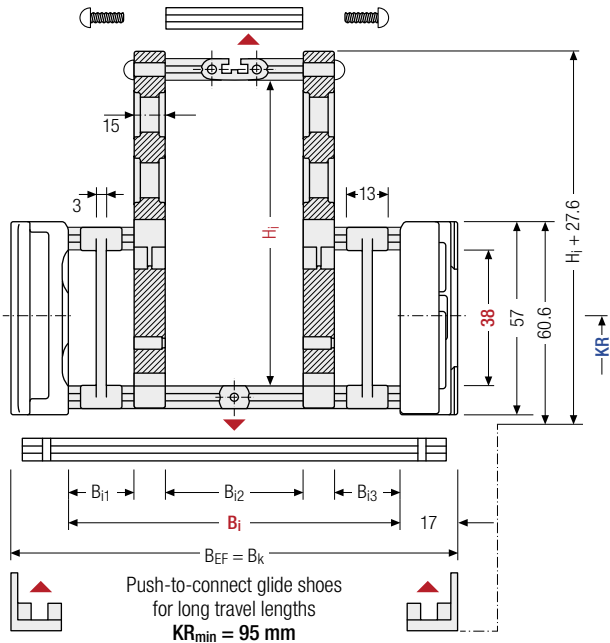

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable  
carrier length

Cable carrier length  $L_k$

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length  $L_k$   
rounded to pitch  $t$

Intrinsic cable carrier  
weight

Determining the intrinsic  
cable carrier weight strongly  
depends on the selected  
stay arrangement.  
Please contact us.

$h_i$ [mm]	$H_i$ [mm]	$h_G$ [mm]	$B_i$ [mm]	$B_{i1 \text{ min}}$ [mm]	$B_{i3 \text{ min}}$ [mm]	$B_k$ [mm]	$B_{EF}$ [mm]	KR [mm]					
38	130	160	57	200 – 400	16	16	$B_i + 34$	$B_i + 34$	75	95	115	145	175
	200								220	260	275	300	350

Order example



MC0650 Type	·	300 $B_i$ [mm]	·	RMAO Stay variant	·	175 $KR$ [mm]	·	1430 $L_k$ [mm]	·	HS Stay arrangement
----------------	---	-------------------	---	----------------------	---	------------------	---	--------------------	---	------------------------




**RMA0 – assembly to the outside:**

The cable carrier has to rest on the side bands and not on the stays.

Guiding in a **channel is required** for support.  
Please contact our technical support at [technik@kabelschlepp.de](mailto:technik@kabelschlepp.de) to find the corresponding guide channel.

Please note the operating and installation height.



Subject to change without notice.

PROTUM® series
K series
UNIFLEX Advanced series
M series
TKIP series
XL series
QUANTUM® series
TKR series
TKA series
UAT series



Plastic stay RE –  
screw-in frame stay

- Plastic profile bars for light to medium loads.  
Assembly without screws.
- Available customized in **8 mm grid**.
- **Outside/inside:** release by turning by 90°.




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**8 mm** B<sub>i</sub> 50 – 266 mm  
in **8 mm** width sections

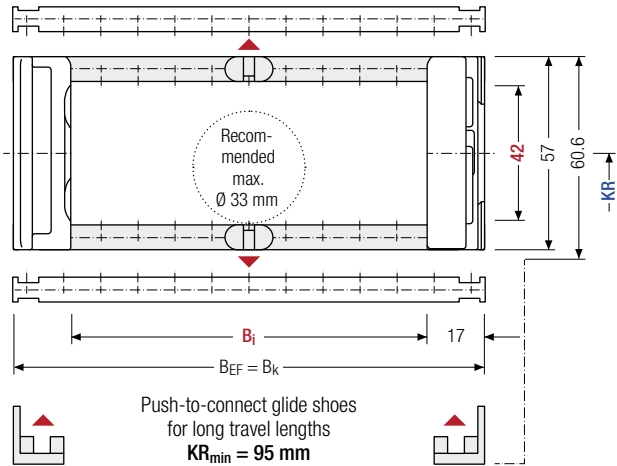

The maximum cable diam-  
eter strongly depends on  
the bending radius and the  
desired cable type.  
Please contact us.



For rough environmental  
conditions, we recommend  
the use of OFFROAD glide  
shoes with 80 % higher  
wear volume.

Calculating the  
cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

h <sub>i</sub> [mm]	h <sub>g</sub> [mm]	h <sub>g'</sub> [mm]	h <sub>g'</sub> Offroad [mm]	B <sub>i</sub> [mm]						B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]		q <sub>k</sub> [kg/m]
42	57	60.6	62.2	50	58	66	74	82	90	B <sub>i</sub> + 34	B <sub>i</sub> + 34	75	95	2.00
				98	106	114	122	130	138			115	145	
				146	154	162	170	178	186			175	220	–
				194	202	210	218	226	234			260	275	2.84
				242	250	258	266					300	350	

Order example




ME0650 Type · 210 B<sub>i</sub> [mm] · RE Stay variant · 175 KR [mm] · 1430 L<sub>k</sub> [mm]


HS Stay arrangement




Plastic stay RD –  
Frame stay with hinge


- Plastic profile bars with hinge for light to medium loads. Assembly without screws.
- Available customized in **8 mm grid**.
- **Outside:** swivable to both sides.
- **Inside:** release by turning by 90°.

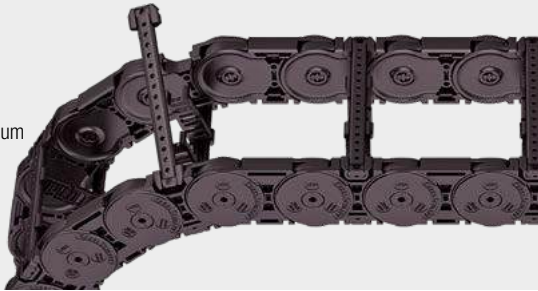



 Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)

 Stay arrangement on each chain link (**VS: fully-stayed**)

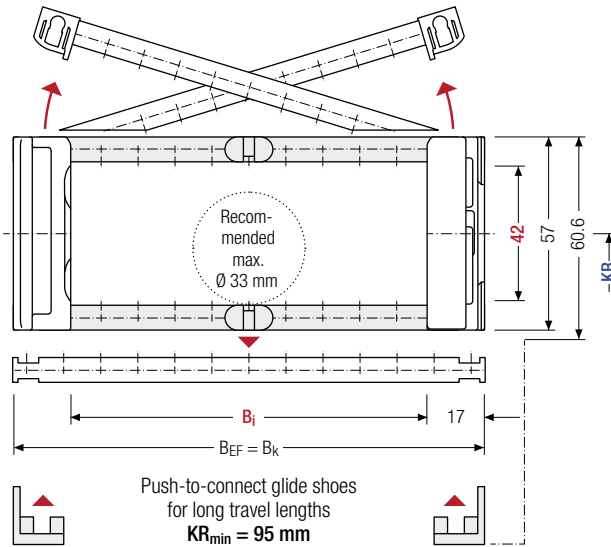 **8 mm** B<sub>i</sub> 50 – 266 mm in 8 mm width sections



 The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

 For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

Calculating the cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub> rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G</sub> ' [mm]	h <sub>G</sub> ' Offroad [mm]	B <sub>i</sub> [mm]						B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]		q <sub>k</sub> [kg/m]
42	57	60.6	62.2	50	58	66	74	82	90	B <sub>i</sub> + 34	B <sub>i</sub> + 34	75	95	2.00
				98	106	114	122	130	138			115	145	
				146	154	162	170	178	186			175	220	2.84
				194	202	210	218	226	234			260	275	
				242	250	258	266					300	350	

Order example

 **MK0650** Type **210** B<sub>i</sub> [mm] **RD** Stay variant **175** KR [mm] **1430** L<sub>k</sub> [mm] **HS** Stay arrangement

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



## Divider systems

As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).


As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

The dividers are easily attached to the stay for applications with lateral acceleration and for applications laying on their side by simply turning the frame stay by 180°. The arresting cams click into place in the locking grids in the crossbars (**version B**).

The groove in the frame stay faces outwards.

### Divider system TS0 without height separation


Vers.	$a_T$ min [mm]	$a_x$ min [mm]	$a_c$ min [mm]	$a_x$ Raster [mm]	$n_T$ min
A	6.5	13	8.8	—	—
B	13	16	11.8	8	—

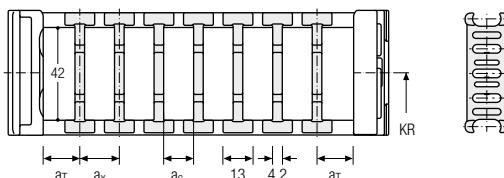

The dividers can be moved within the cross section (version A) or fixed (version B).

### Divider system TS1 with continuous height separation

Vers.	$a_T$ min [mm]	$a_T$ max [mm]	$a_x$ min [mm]	$a_c$ min [mm]	$a_x$ Raster [mm]	$n_T$ min
A	6.5	25	13	8.8	—	2

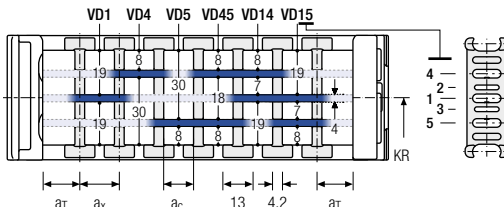


The dividers can be moved within the cross section.

## TOTALTRAX® complete systems



Benefit from the advantages of the TOTALTRAX® complete system. A complete delivery from one source – with a warranty certificate on request! Learn more at [tsubaki-kabelschlepp.com/totaltrax](http://tsubaki-kabelschlepp.com/totaltrax)

**TRAXLINE® cables for cable carriers**



Hi-flex electric cables which were especially developed, optimized and tested for use in cable carriers can be found at **[tsubaki-kabelschlepp.com/traxline](http://tsubaki-kabelschlepp.com/traxline)**




Divider system TS3 with height separation made of plastic partitions


Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4	16 / 42*	8	2

\* For aluminum partitions

The dividers are fixed by the partitions, the complete divider system is movable in the cross section.




Aluminum partitions in 1 mm increments with **a<sub>x</sub> > 42 mm** are also available.

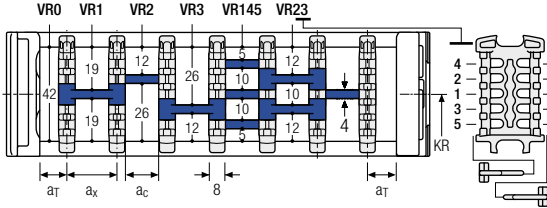

a <sub>x</sub> (center distance of dividers) [mm]											
a <sub>c</sub> (nominal width of inner chamber) [mm]											
16	18	23	28	32	33	38	43	48	58	64	68
8	10	15	20	24	25	30	35	40	50	56	60
78	80	88	96	112	128	144	160	176	192	208	
70	72	80	88	104	120	136	152	168	184	200	

When using **plastic partitions with a<sub>x</sub> > 112 mm**, we recommend an additional center support with a **twin divider** (S<sub>T</sub> = 3 mm). Twin dividers are also suitable for retrofitting in the partition system.

Order example



TS3	A	2	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n <sub>T</sub>	Chamber	a <sub>x</sub>	Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1, TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.

More product information online



Assembly instructions etc.: Additional info via your smartphone or check online at [tsubaki-kabelschlepp.com/downloads](https://tsubaki-kabelschlepp.com/downloads)



Configure your custom cable carrier: here [online-engineer.de](https://online-engineer.de)

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKiP  
series

XL  
series


QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series

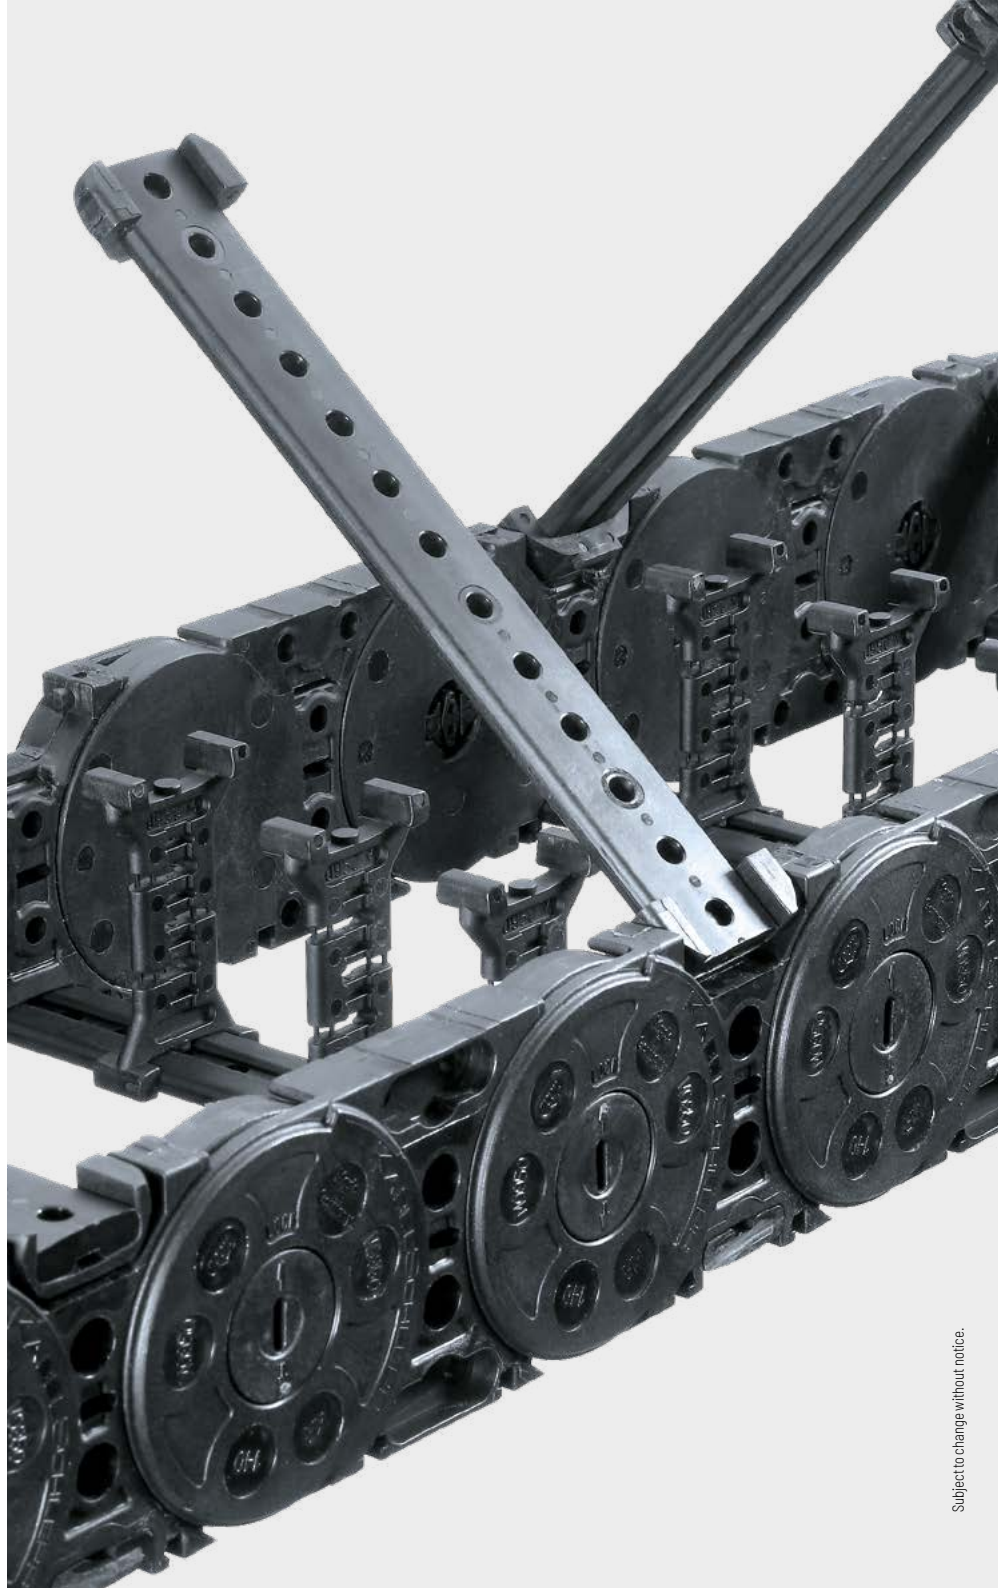


PROTUM®  
seriesK  
seriesUNIFLEX  
Advanced  
series**M  
series**TKIP  
seriesXL  
seriesQUANTUM®  
seriesTKR  
seriesTKA  
seriesUAT  
series



Universal end connectors UMB – plastic (standard)

The universal mounting brackets (UMB) are made from plastic and can be mounted **from the top, from the bottom, face on or from the side**.

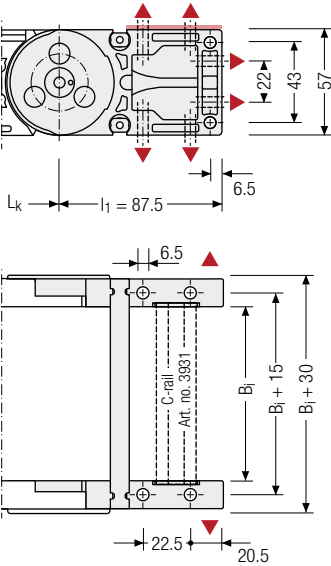


Recommended tightening torque: 11 Nm for cheese-head screws ISO 4762 - M6 - 8.8

Connection point

**F** – fixed point  
**M** – driver


Connection type

**U** – universal mounting bracket



End connectors – plastic/steel

Plastic link end connector, steel end connector. The connection variants on the fixed point and on the driver can be combined and, if required, changed afterwards.

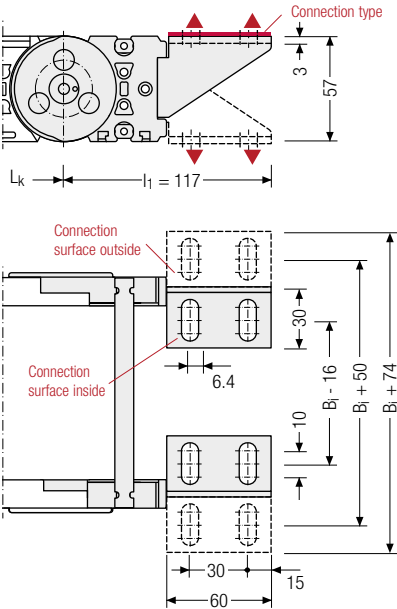

Assembly options

Connection point


**F** – fixed point  
**M** – driver

Connection surface

**I** – connection surface inside  
**A** – connection surface outside

Connection type

**A** – threaded joint outside (standard)  
**I** – threaded joint inside  
**F** – flange connection



Order example

	Plastic/steel	F	A	A
UMB	M	U		
End connector	Connection point	Connection type	Connection surface	

We recommend the use of strain reliefs at the driver and fixed point. See from p. 926.

PROTUM® series

K series

UNIFLEX Advanced series

**M series**

TKHP series

XL series

QUANTUM® series

TKR series

TKA series

UAT series



# M0950



**Pitch**  
95 mm



**Inner heights**  
50 – 58 mm




**Inner widths**  
45 – 600 mm



**Bending radii**  
140 – 380 mm

## Stay variants



**Aluminum stay RS** ..... page 404

### Frame stay, narrow "The standard"

- » Aluminum profile bars for light to medium loads. Assembly without screws.
- » **Outside/inside:** release by turning by 90°.



**Aluminum stay RV** ..... page 408

### Frame stay, reinforced


- » Aluminum profile bars with plastic adapter for medium to high loads and large cable carrier widths. Assembly without screws.
- » **Outside/inside:** release by turning by 90°.



**Aluminum stay RM** ..... page 412

### Frame stay, solid

- » Aluminum profile bars for heavy loads and maximum cable carrier widths. Double threaded joints on both sides "Heavy Duty".
- » **Inside/outside:** Threaded joint easy to release.



**Aluminum stay LG** ..... page 414

### Hole stay, split version

- » Optimum cable routing in the neutral bending line. Split version for easy cable routing. Stays also available unsplit.
- » **Outside/inside:** Screw-fixing easy to release.



## MT series

Also available as covered variants with cover system.  
More information can be found in chapter "MT series" from p. 628.



## Stay variants



### Aluminum stay RMAI ..... page 416

#### Mounting frame stay

- » Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- » **Inside:** Screw-fixing easy to release.



### Aluminum stay RMAO ..... page 418

#### Mounting frame stay

- » Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- » **Outside:** Screw-fixing easy to release.



### Aluminum stay RMR ..... page 420

#### Frame rolling stay

- » Aluminum profile bars with rotating plastic rolling stay for highest requirements with gentle cable guiding. Double threaded joint on both sides.
- » **Inside/outside:** threaded joint easy to release.



### Plastic stay RE ..... page 422

#### Frame screw-in stay

- » Plastic profile bars for light to medium loads. Assembly without screws.
- » **Outside/inside:** release by turning by 90°.



### Plastic stay RD ..... page 423

#### Frame stay with hinge

- » Plastic profile bars with hinge for light to medium loads. Assembly without screws.
- » **Outside:** swivable to both sides.
- » **Inside:** release by turning by 90°.



PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

**M  
series**

TKHP  
series


XL  
series

QUANTUM®  
series

TKR  
series


TKA  
series

UAT  
series

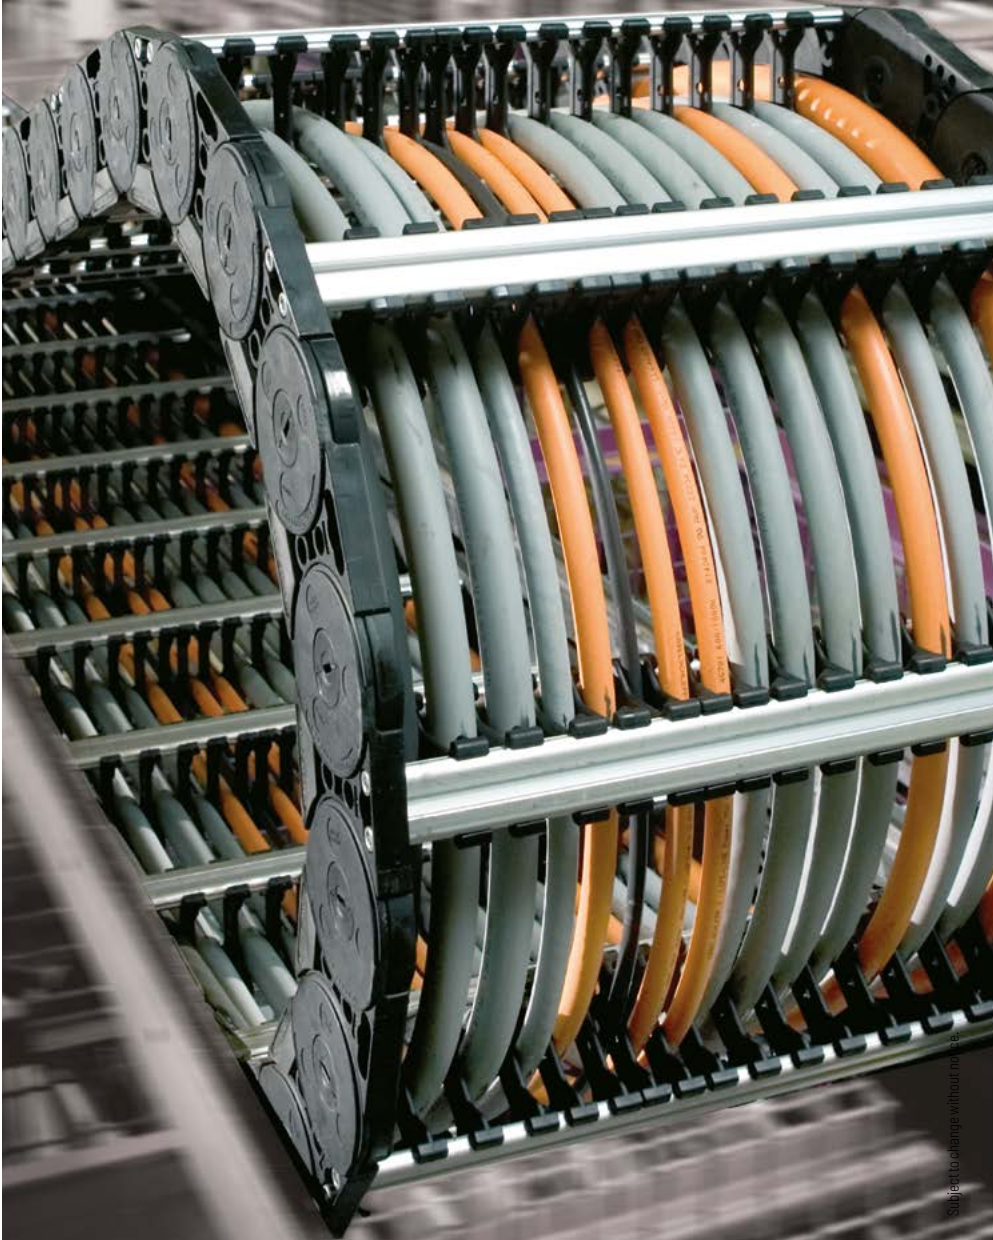



Unsupported arrangement

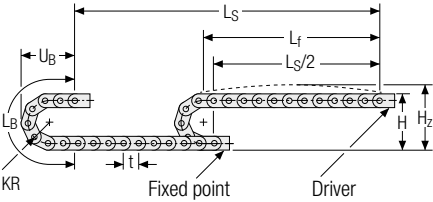


KR [mm]	H [mm]	H <sub>z</sub> [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
140	360	405	630	275
170	420	465	725	305
200	480	525	819	335
260	600	645	1007	395
290	660	705	1102	425
320	720	765	1196	445
380	840	885	1384	515

Load diagram for unsupported length depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight  $q_k = 4.5 \text{ kg/m}$ . For other inner widths, the maximum additional load changes.

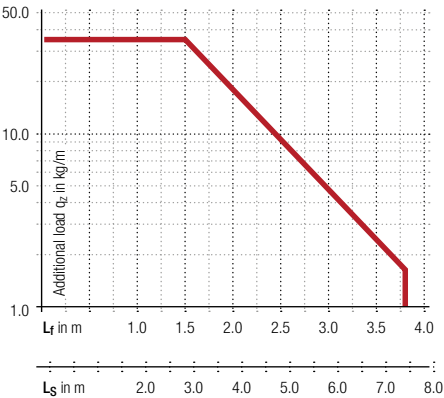

**Speed**  
up to 10 m/s



**Acceleration**  
up to 30 m/s<sup>2</sup>




**Travel length**  
up to 7.4 m



**Additional load**  
up to 35 kg/m

Gliding arrangement | GO module with chain links optimized for gliding

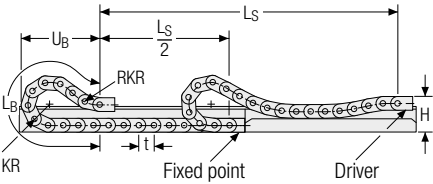

KR [mm]	H [mm]	GO module RKR [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
140	240	500	1580	740
170	240	500	1710	773
200	240	500	1995	888
260	240	500	2565	1114
290	240	500	2755	1183
320	240	500	3040	1296
380	240	500	3610	1523



**Speed**  
up to 8 m/s



**Acceleration**  
up to 20 m/s<sup>2</sup>



**Travel length**  
up to 260 m



**Additional load**  
up to 35 kg/m



The gliding cable carrier must be guided in a channel. See p. 866.

The GO module mounted on the driver is a defined sequence of 4 adapted KR/RKR link plates.

Glide shoes have to be used for gliding applications.




Our technical support can provide help for gliding arrangements:  
[technik@kabelschlepp.de](mailto:technik@kabelschlepp.de)



## Aluminum stay RS – frame stay narrow


- Extremely quick to open and close
- Aluminum profile link bars for light to medium loads.  
Assembly without screws.
- Available customized in **1 mm grid**.
- **Outside/inside:** release by turning by 90°.

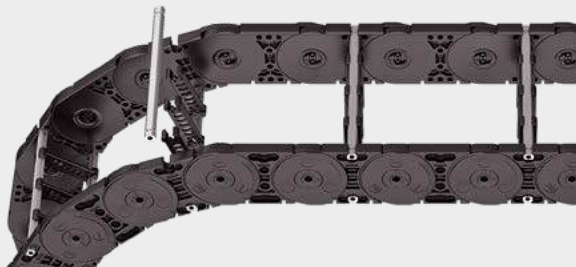

Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)

Stay arrangement on each chain link (**VS: fully-stayed**)

**1 mm**  $B_i$  75 – 400 mm in **1 mm width sections**

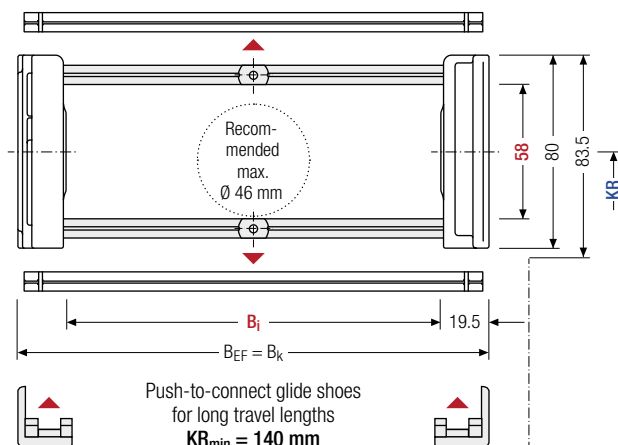

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

### Calculating the cable carrier length

#### Cable carrier length $L_k$

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length  $L_k$  rounded to pitch  $t$

$h_i$ [mm]	$h_G$ [mm]	$h_G^*$ [mm]	$h_G$ Offroad [mm]	$B_i$ [mm]*	$B_k$ [mm]	$B_{EF}$ [mm]	$KR$ [mm]				$q_k$ [kg/m]
58	80	83.5	86	75 – 400	$B_i + 39$	$B_i + 39$	140	170	200	260	2.93 – 4.71
							290	320	380		

\* in 1 mm width sections

### Order example

MC0950 Type
 400  $B_i$  [mm]
 RS Stay variant
 200  $KR$  [mm]
 2850  $L_k$  [mm]
 HS Stay arrangement



Divider systems

As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).

As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).


For applications with lateral acceleration and rotated by 90°, the dividers can be attached by simply clipping on a socket (available as an accessory).

The socket additionally serves as a spacer between the dividers and is available in 1 mm sections between 3 – 50 mm. The inner height is reduced to 54 mm (**version B**).

Divider system TSO without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4.5	14	10	2


The dividers can be moved in the cross section.

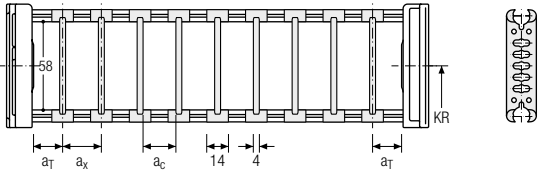

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4.5	25	14	10	2

The dividers can be moved in the cross section.

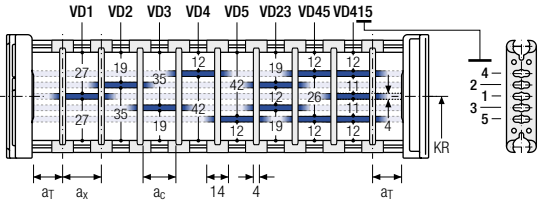



Divider system TS2 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4.5	23	19	2

With grid distribution (1 mm grid).  
The dividers are attached by the height separation, the grid can be moved in the cross section.

Sliding dividers are optionally available (thickness of divider = 4 mm).

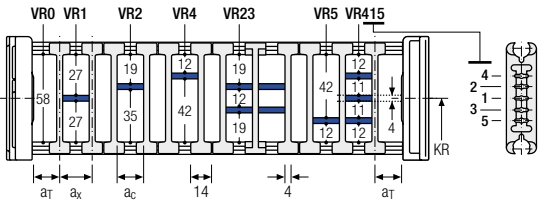

 Please note that the real dimensions may deviate slightly from the values indicated here.

Order example



TS2	A	3	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n <sub>T</sub>	Chamber	a <sub>x</sub>	Height separation

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKiP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series


UAT  
series




Divider system TS3 with height separation consisting of plastic partitions

As a standard, the divider **version A** is used for vertical partitioning within the cable carrier. The complete divider system can be moved within the cross section.

Divider version A

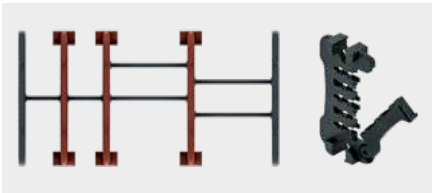



End divider

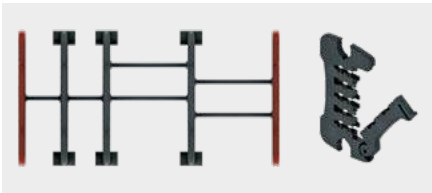

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	6/2*	14	10	2

\* For End divider


The dividers are fixed by the partitions, the complete divider system is movable in the cross section.

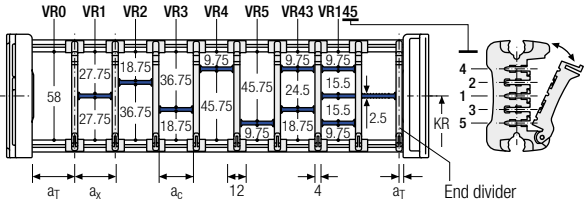

a <sub>x</sub> (center distance of dividers) [mm]																	
a <sub>c</sub> (nominal width of inner chamber) [mm]																	
14	16	19	23	24	28	29	32	33	34	38	39	43	44	48	49	54	
10	12	15	19	20	24	25	28	29	30	34	35	39	40	44	45	50	
58	59	64	68	69	74	78	79	80	84	88	89	94	96	99	112		
54	55	60	64	65	70	74	75	76	80	84	85	90	92	95	108		

When using partitions with a<sub>x</sub> > 49 mm we recommended an additional preferential central support.

Order example



TS3

A

3

K1

34

VR1

⋮

K4

38

VR3

Divider systemVersionn<sub>T</sub>Chambera<sub>x</sub>Height separation

Please state the designation of the divider system (**TS0**, **TS1**,...), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1**, **TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.








Aluminum stay RV –  
frame stay reinforced

- Aluminum profile bars with plastic adapter for medium to high loads and large cable carrier widths. Assembly without screws.
- Available customized in **1 mm grid**.
- **Outside/inside:** release by turning by 90°.

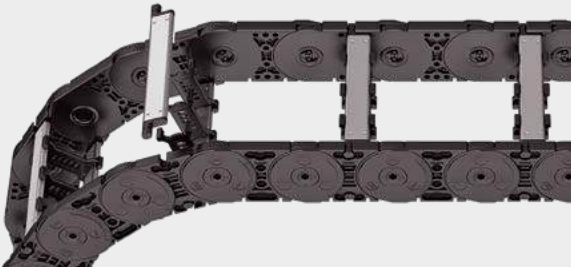


Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(**HS:** half-stayed)



Stay arrangement on each  
chain link (**VS:** fully-stayed)



**1 mm** B<sub>i</sub> 75 – 500 mm  
in **1 mm width sections**

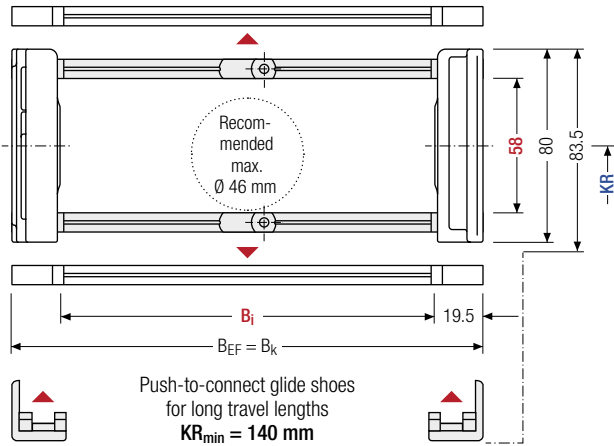

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

Calculating the  
cable carrier length

Cable carrier length **L<sub>k</sub>**

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length **L<sub>k</sub>**  
rounded to pitch t

<b>h<sub>i</sub></b> [mm]	<b>h<sub>G</sub></b> [mm]	<b>h<sub>G'</sub></b> [mm]	<b>h<sub>G'</sub> Offroad</b> [mm]	<b>B<sub>i</sub></b> [mm]*	<b>B<sub>k</sub></b> [mm]	<b>B<sub>EF</sub></b> [mm]	<b>KR</b> [mm]				<b>q<sub>k</sub></b> [kg/m]
58	80	83.5	86	75 – 500	B <sub>i</sub> + 39	B <sub>i</sub> + 39	140	170	200	260	3.32 – 6.02
							290	320	380		

\* in 1 mm width sections

Order example



<b>MC0950</b> Type	·	<b>400</b> B <sub>i</sub> [mm]	·	<b>RV</b> Stay variant	·	<b>200</b> KR [mm]	·	<b>2850</b> L <sub>k</sub> [mm]	·	<b>HS</b> Stay arrangement
-----------------------	---	-----------------------------------	---	---------------------------	---	-----------------------	---	------------------------------------	---	-------------------------------



## Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).

As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

### Divider system TSO without height separation

Vers.	$a_T$ min [mm]	$a_x$ min [mm]	$a_c$ min [mm]	$n_T$ min
A	45	14	10	2


The dividers can be moved in the cross section.

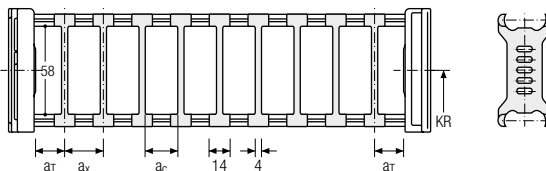

## Divider system TS1 with continuous height separation

Vers.	$a_T$ min [mm]	$a_T$ max [mm]	$a_x$ min [mm]	$a_c$ min [mm]	$n_T$ min
A	4.5	25	14	10	2

The dividers can be moved in the cross section.

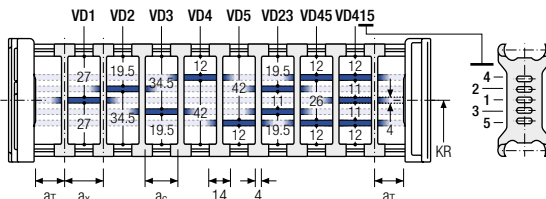


### Divider system TS2 with partial height separation

Vers.	$a_T$ min [mm]	$a_x$ min [mm]	$a_c$ min [mm]	$n_T$ min
A	5.5	21	15	2

With grid distribution (**1 mm grid**).  
The dividers are attached by the height separation, the grid can be moved in the cross section.

Sliding dividers are optionally available (thickness of divider = 4 mm).

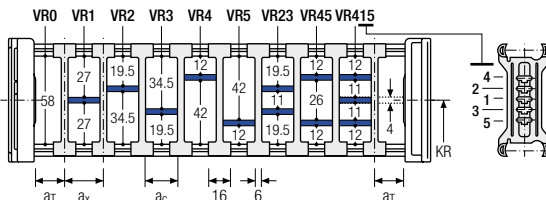

## TOTALTRAX® complete systems

Benefit from the advantages of the TOTALTRAX® complete system. A complete delivery from one source – with a warranty certificate on request! Learn more at [tsubaki-kabelschlepp.com/totaltrax](http://tsubaki-kabelschlepp.com/totaltrax)



**TRAXLINE® cables for cable carriers**


Hi-flex electric cables which were especially developed, optimized and tested for use in cable carriers can be found at [tsubaki-kabelschlepp.com/traxline](http://tsubaki-kabelschlepp.com/traxline)




Divider system TS3 with height separation made of plastic partitions

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4	16 / 42*	8	2

\* For aluminum partitions

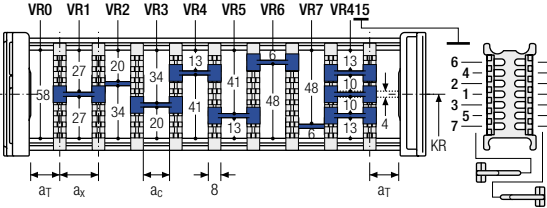

The dividers are fixed by the partitions, the complete divider system is movable in the cross section.



Aluminum partitions in 1 mm increments with **a<sub>x</sub> > 42 mm** are also available.

a <sub>x</sub> (center distance of dividers) [mm]											
a <sub>c</sub> (nominal width of inner chamber) [mm]											
16	18	23	28	32	33	38	43	48	58	64	68
8	10	15	20	24	25	30	35	40	50	56	60
78	80	88	96	112	128	144	160	176	192	208	
70	72	80	88	104	120	136	152	168	184	200	

When using **plastic partitions with a<sub>x</sub> > 112 mm**, we recommend an additional center support with a **twin divider** (S<sub>T</sub> = 4 mm). Twin dividers are also suitable for retrofitting in the partition system.

Order example

TS3	.	A	.	3	.	K1	.	34	-	VR1
						⋮		⋮		⋮
						K4	.	38	-	VR3
Divider system		Version		n <sub>T</sub>		Chamber		a <sub>x</sub>		Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).


If using divider systems with height separation (**TS1, TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.

### More product information online

Assembly instructions etc.: Additional info via your smartphone or check online at [tsubaki-kabelschlepp.com/downloads](https://tsubaki-kabelschlepp.com/downloads)

Configure your custom cable carrier here:  
[online-engineer.de](https://online-engineer.de)



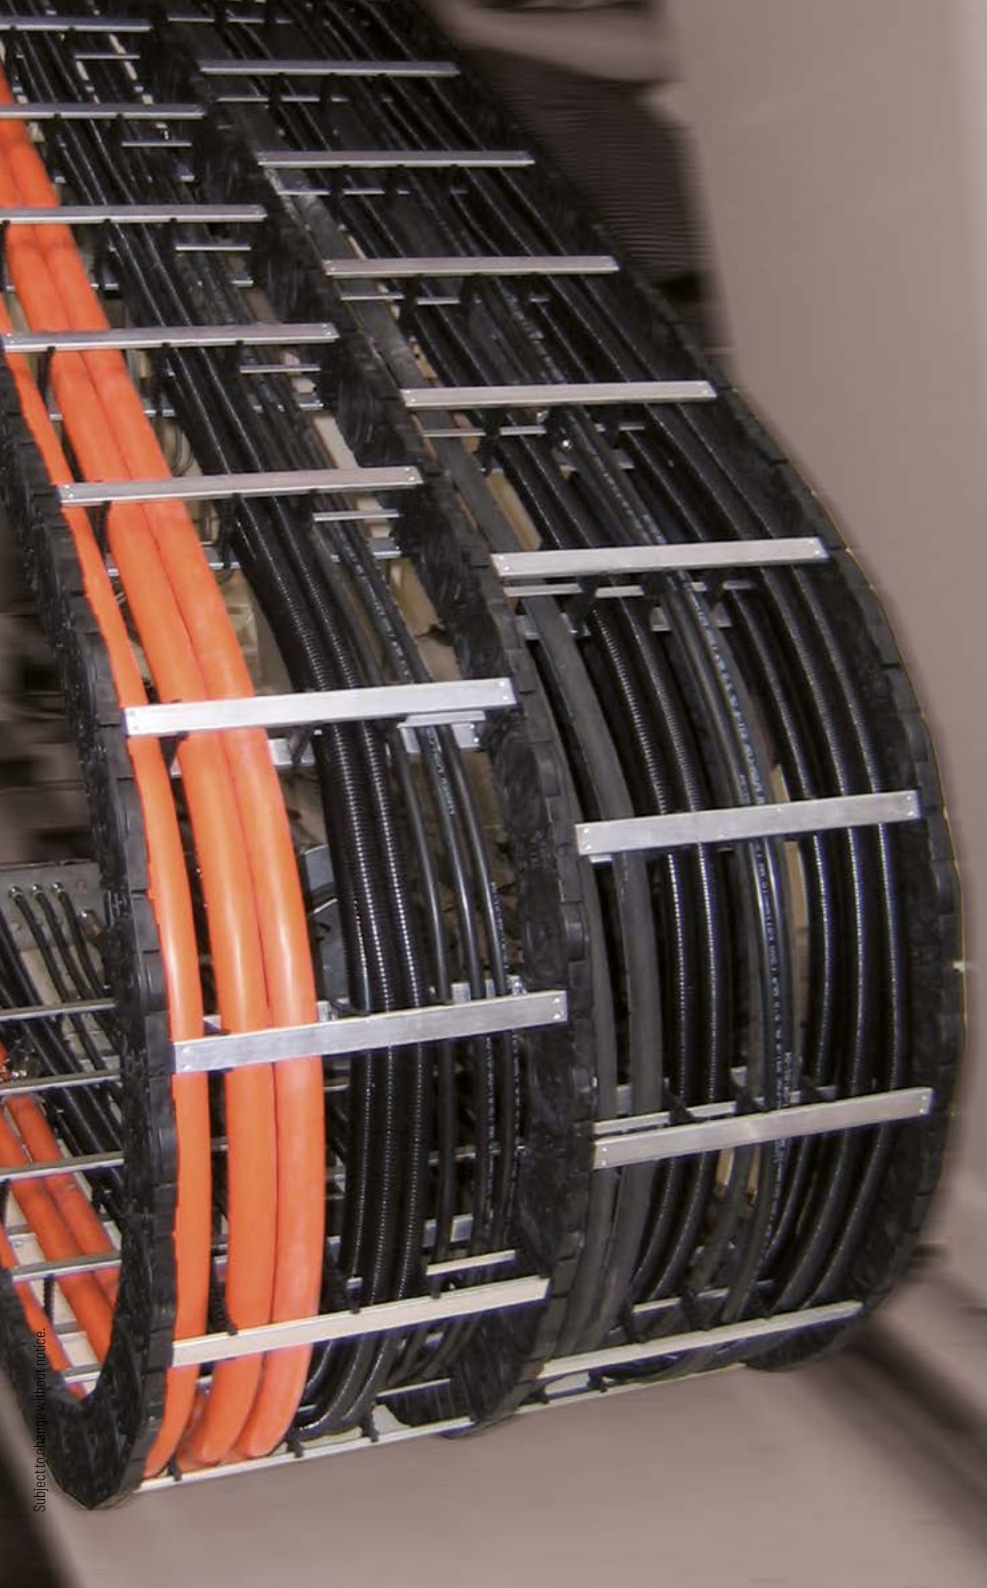

Subject to change without notice.

UAT  
series

TKA  
series

TKR  
series

QUANTUM®  
series

XL  
series

TKIP  
series

**M**  
series

UNIFLEX  
Advanced  
series

K  
series

PROTUM®  
series



## Aluminum stay RM – frame stay solid

- Aluminum profile bars for heavy loads and maximum cable carrier widths. Double threaded joints on both sides “Heavy Duty”.
- Available customized in **1 mm grid**.
- **Inside/outside:** Threaded joint easy to release.

**HEAVY DUTY**  
TSUBAKI KABELSCHLEPP




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 75 – 600 mm  
in **1 mm width sections**

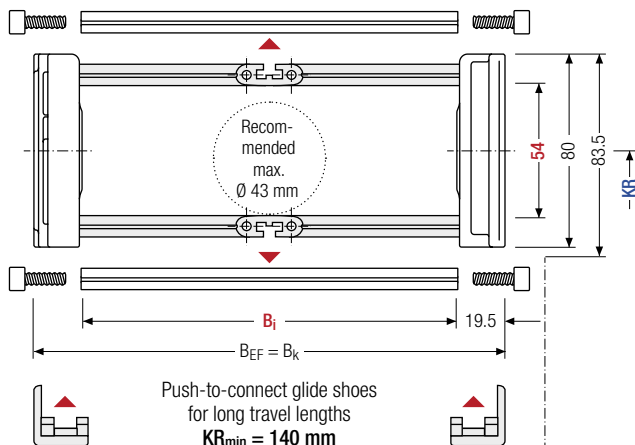

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.



For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

### Calculating the cable carrier length

#### Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G'</sub> [mm]	h <sub>G'</sub> Offroad [mm]	B <sub>i</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]				q <sub>k</sub> [kg/m]
54	80	83.5	86	75 – 600	B <sub>i</sub> + 39	B <sub>i</sub> + 39	140	170	200	260	3.63 – 6.55
							290	320	380		

\* in 1 mm width sections

### Order example



MC0950

Type

400

B<sub>i</sub> [mm]

RM

Stay variant

200

KR [mm]

2850

L<sub>k</sub> [mm]

HS

Stay arrangement



Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).

As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

Divider system TS0 without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4.5	14	10	–


The dividers can be moved in the cross section.

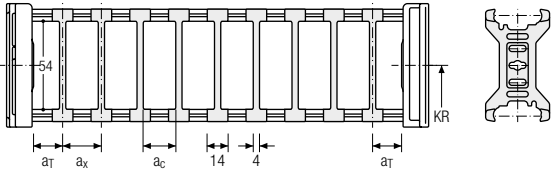

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	3.5	25	12	8	2

The dividers can be moved in the cross section.

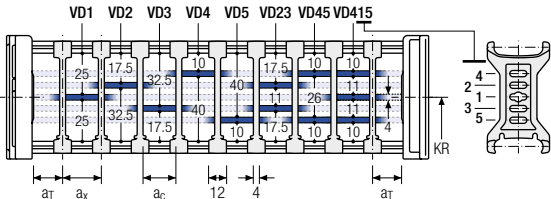


Divider system TS2 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4.5	21	15	2

With grid distribution (1 mm grid).  
The dividers are attached by the height separation, the grid can be moved in the cross section.

Sliding dividers are optionally available (thickness of divider = 4 mm).

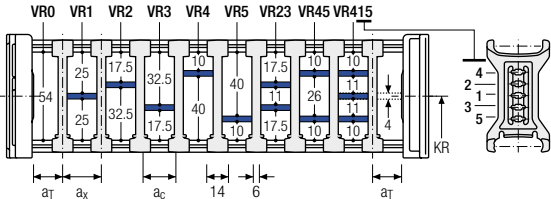

Order example



TS2	A	3	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n <sub>T</sub>	Chamber	a <sub>x</sub>	Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1, TS2**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKHP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



Aluminum stay LG –  
Hole stay, split version

- Optimum cable routing in the neutral bending line.  
Split version for easy cable routing. Stays also avail-  
able unsplit.
- Available customized in **1 mm width sections**.
- **Outside/inside:** Screw-fixing easy to release.




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 75 – 600 mm  
in **1 mm width sections**

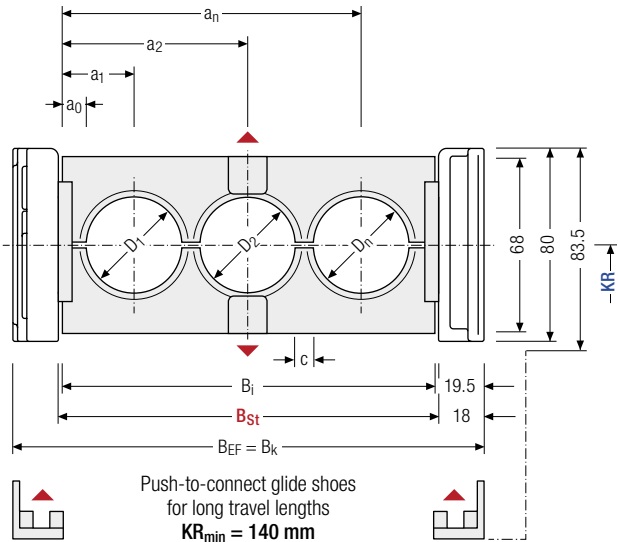

The maximum cable diam-  
eter strongly depends on  
the bending radius and the  
desired cable type.  
Please contact us.

Calculating the cable  
carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

Calculating  
the stay width

Stay width B<sub>St</sub>

$$B_{St} = \sum D + \sum c + 2 a_0$$

D <sub>max</sub> [mm]	D <sub>min</sub> [mm]	h <sub>G</sub> [mm]	B <sub>i</sub> [mm]	B <sub>St</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	c <sub>min</sub> [mm]	a <sub>0</sub> min [mm]	KR [mm]				q <sub>k</sub> 50 %** [kg/m]
50	12	80	75 – 600	78 – 603	B <sub>St</sub> + 39	B <sub>St</sub> + 39	4	11	140	170	200	260	3.89 – 8.25
									290	320	380		

\* in 1 mm width sections


\*\* Hole ratio of the hole stay approx. 50 %

Order example



MC0950 Type	·	400 B <sub>i</sub> [mm]	·	LG Stay variant	·	200 KR [mm]	·	2850 L <sub>k</sub> [mm]	·	HS Stay arrangement
----------------	---	----------------------------	---	--------------------	---	----------------	---	-----------------------------	---	------------------------



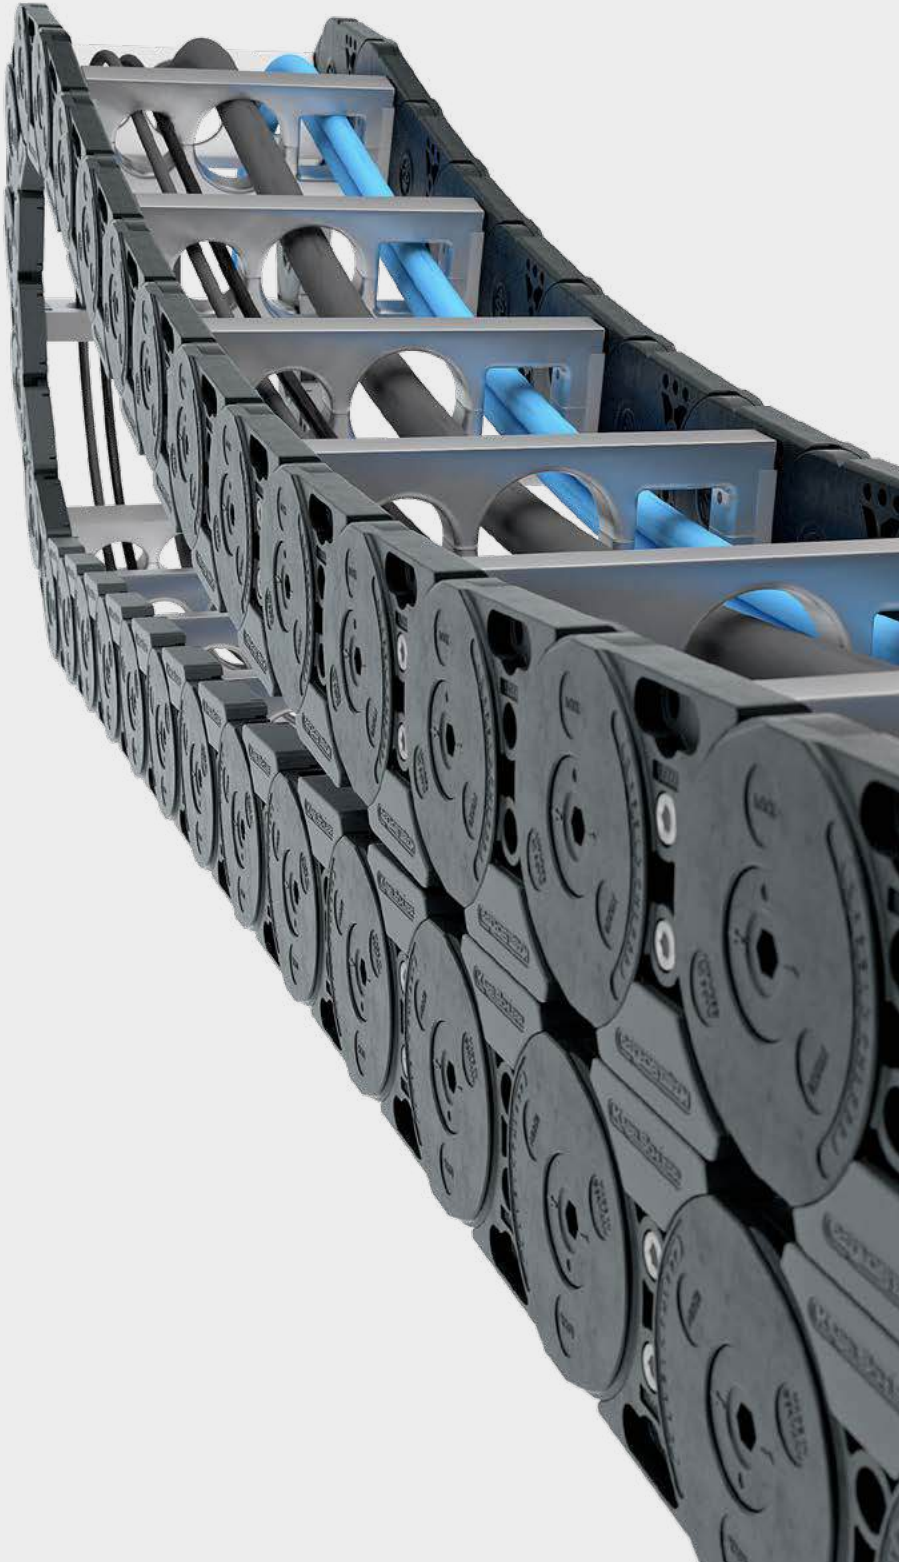

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

**M**  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series




## Aluminum stay RMAI – mounting frame stay


- Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- The mounting frame stay is mounted on the inside in the bending radius.
- Available customized in **1 mm width sections**.
- **Inside:** Screw-fixing easy to release.




 Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)

 Stay arrangement on each chain link (**VS: fully-stayed**)

 **1 mm** Bi 200 – 500 mm in **1 mm width sections**

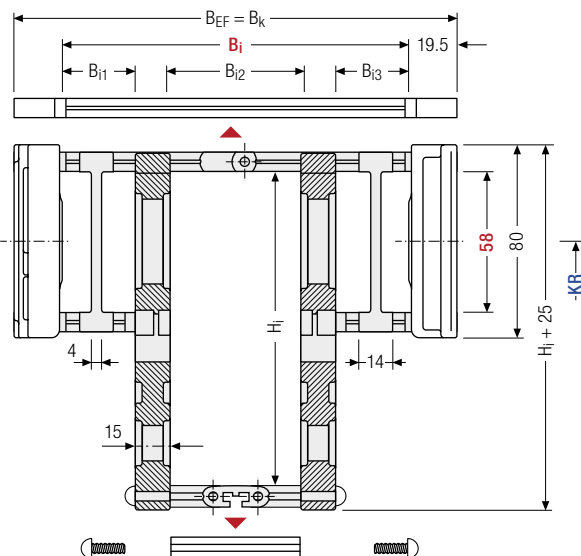

 The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

### Calculating the cable carrier length

#### Cable carrier length $L_k$

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length  $L_k$  rounded to pitch  $t$

### Intrinsic cable carrier weight

Determining the intrinsic cable carrier weight strongly depends on the selected stay arrangement. Please contact us.


$h_i$ [mm]	$H_i$ [mm]	$h_G$ [mm]	$B_i$ [mm]	$B_{i1 \text{ min}}$ [mm]	$B_{i3 \text{ min}}$ [mm]	$B_K$ [mm]	$B_{EF}$ [mm]	$KR$ [mm]
58	130 200	160	200 – 500	40	40	$B_i + 39$	$B_i + 39$	170 290
		80						200 320
								260 380

### Order example

	<b>MC0950</b> Type	·	<b>400</b> $B_i$ [mm]	·	<b>RMAI</b> Stay variant	·	<b>200</b> $KR$ [mm]	·	<b>2850</b> $L_k$ [mm]	·	<b>HS</b> Stay arrangement
---	-----------------------	---	--------------------------	---	-----------------------------	---	-------------------------	---	---------------------------	---	-------------------------------



**RMAI – assembly to the inside:**  
Gliding application is not possible when using assembly version RMAI.  
Observe minimum KR:  
H<sub>i</sub> = 130 mm: KR<sub>min</sub> = 170 mm  
H<sub>i</sub> = 160 mm: KR<sub>min</sub> = 200 mm  
H<sub>i</sub> = 200 mm: KR<sub>min</sub> = 260 mm



PROTUM® series	K series	UNIFLEX Advanced series	M series	TKIP series	XL series	QUANTUM® series	TKR series	TKA series	UAT series
----------------	----------	-------------------------	----------	-------------	-----------	-----------------	------------	------------	------------



# Aluminum stay RMAO – mounting frame stay

- Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- The mounting frame stay is mounted on the outside in the bending radius.
- Available customized in **1 mm width sections**.
- **Outside:** Screw-fixing easy to release.




Stay arrangement on every 2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 200 – 500 mm  
in **1 mm width sections**

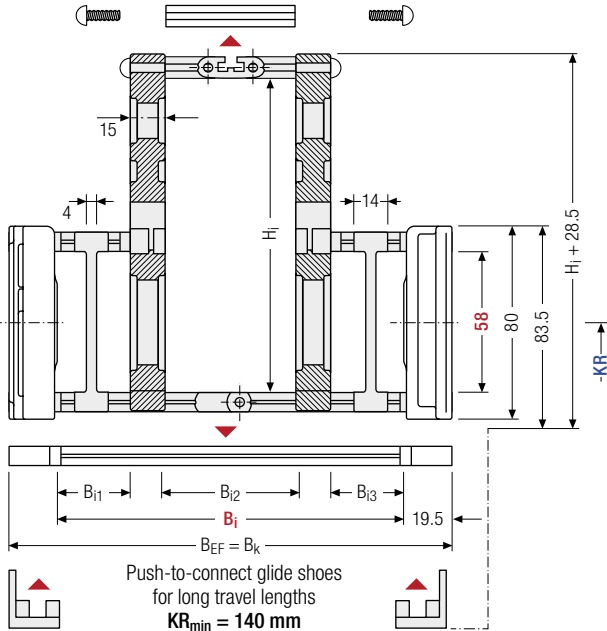

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

## Calculating the cable carrier length

### Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

## Intrinsic cable carrier weight

Determining the intrinsic cable carrier weight strongly depends on the selected stay arrangement. Please contact us.

$h_i$ [mm]	$H_i$ [mm]	$h_g$ [mm]	$B_i$ [mm]	$B_{i1 \text{ min}}$ [mm]	$B_{i3 \text{ min}}$ [mm]	$B_K$ [mm]	$B_{EF}$ [mm]	$KR$ [mm]			
58	130 200	80	200 – 500	40	40	$B_i + 39$	$B_i + 39$	140 290	170 320	200 380	260

## Order example

MC0950  
Type

• 400  
B<sub>i</sub> [mm]

• RMAO  
Stay variant

• 200  
K<sub>R</sub> [mm]

• 2850  
L<sub>k</sub> [mm]


HS  
Stay arrangement



**RMAI – assembly to the outside:**  
The cable carrier has to rest on the side bands and not on the stays.

Guiding in a **channel is required** for support.  
Please contact our technical support at [technik@kabelschlepp.de](mailto:technik@kabelschlepp.de) to find the corresponding guide channel.

Please note the operating and installation height.




PROTUM® series	K series	UNIFLEX Advanced series	M series	TKHP series	XL series	QUANTUM® series	TKR series	TKA series	UAT series
----------------	----------	-------------------------	----------	-------------	-----------	-----------------	------------	------------	------------



Aluminum stay RMR –  
Frame rolling stay

- Aluminum profile bars with rotating plastic rolling stay for highest requirements with gentle cable guiding. Double threaded joint on both sides.
- Available customized in **1 mm grid**.
- **Inside/outside:** Threaded joint easy to release.

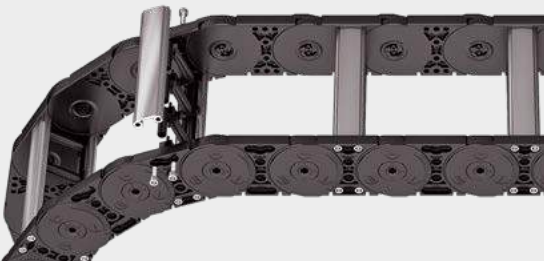



Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)



Stay arrangement on each chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 75 – 600 mm in **1 mm** width sections

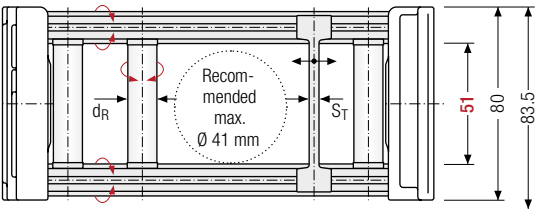


Calculating the cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub> rounded to pitch t

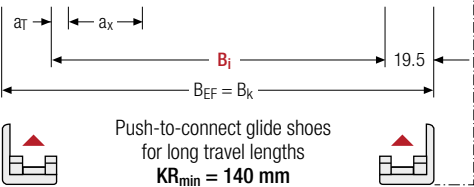

Push-to-connect glide shoes for long travel lengths  
KR<sub>min</sub> = 140 mm



The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.



For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G</sub> <sup>*</sup> [mm]	h <sub>G</sub> <sup>*</sup> Offroad [mm]	B <sub>i</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	d <sub>R</sub> [mm]	S <sub>T</sub> [mm]	a <sub>T</sub> min [mm]	a <sub>X</sub> min [mm]	KR [mm]	q <sub>k</sub> [kg/m]
51	80	83.5	86	75 – 600	B <sub>i</sub> + 39	B <sub>i</sub> + 39	10	4	6.5	37	140 170 200 260 290 320 380	3.63 – 6.55

\* in 1 mm width sections

Order example



MC0950Type

400B<sub>i</sub> [mm]


RMRStay variant

200KR [mm]

2850L<sub>k</sub> [mm]

HSStay arrangement



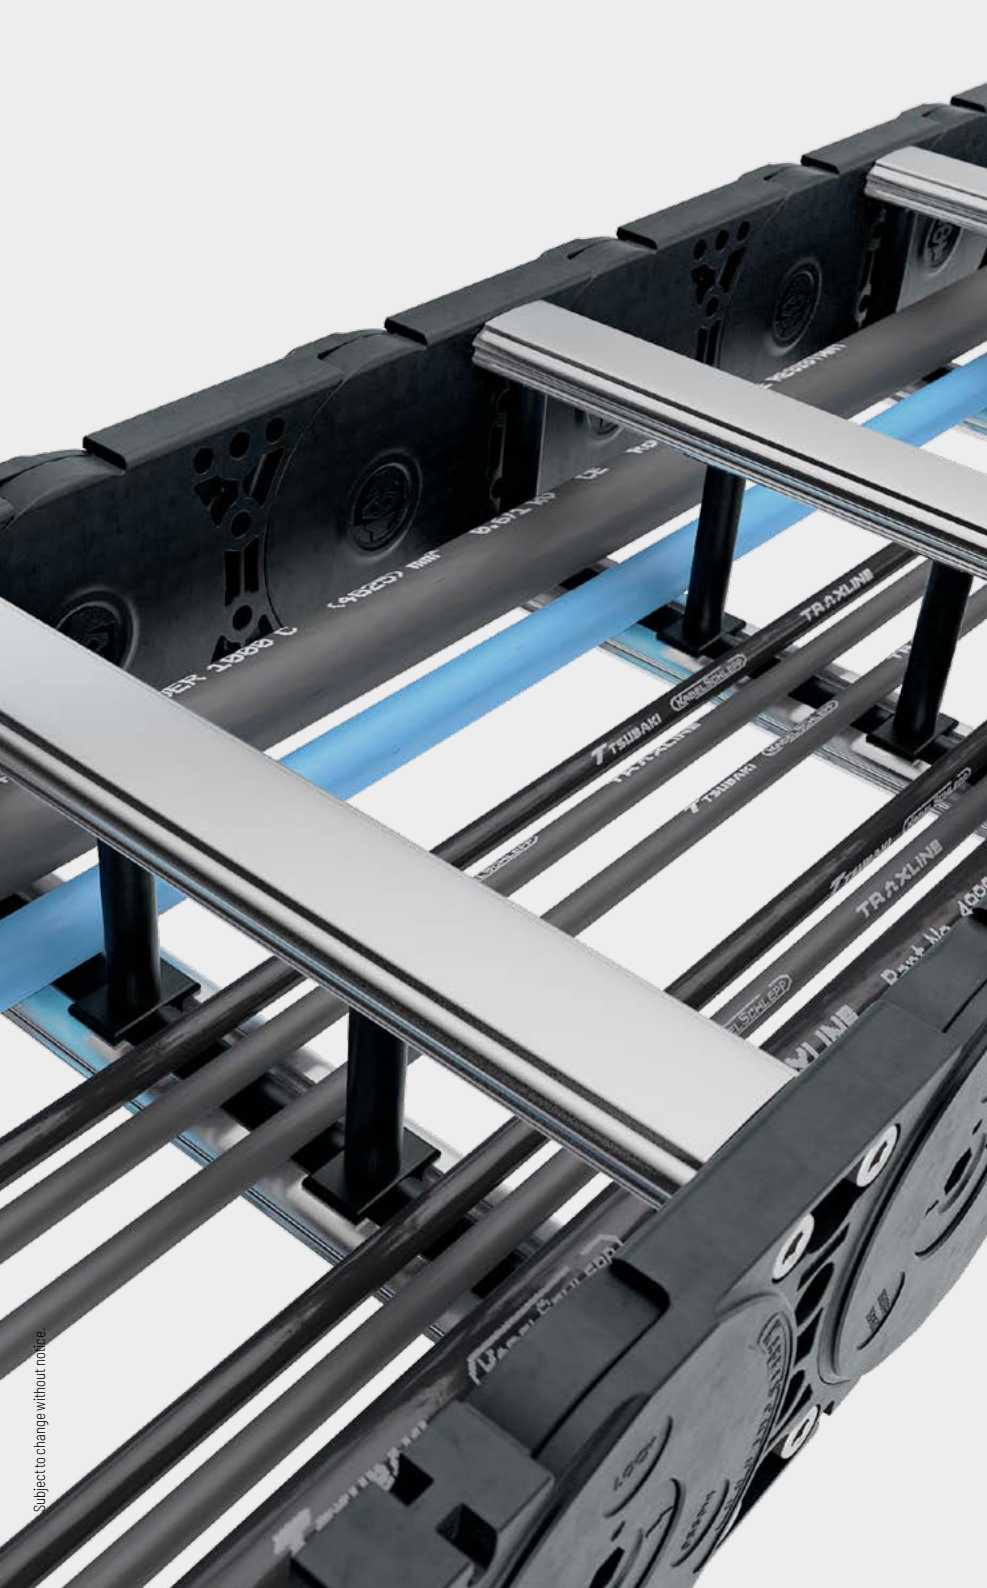

Subject to change without notice.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

**M**  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series


TKA  
series

UAT  
series



Plastic stay RE –  
screw-in frame stay

- Plastic profile bars for light to medium loads.  
Assembly without screws.
- Available customized in **16 mm grid**.
- **Outside/inside:** release by turning by 90°.

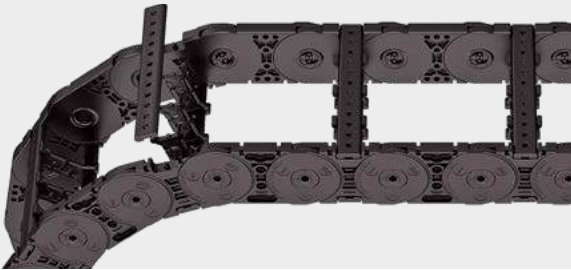


Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**16 mm** B<sub>i</sub> 45 – 557 mm  
in **16 mm** width sections

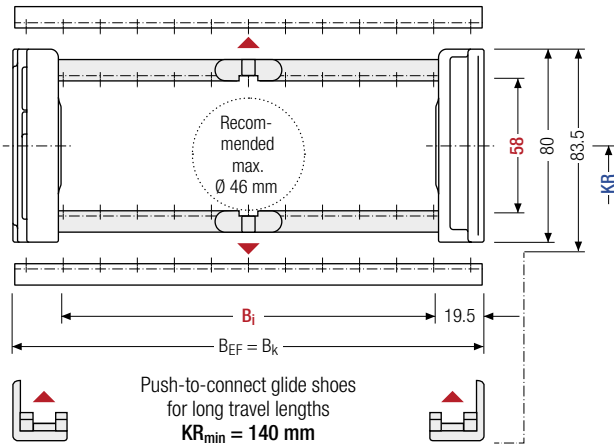

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

Calculating the  
cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G'</sub> [mm]	h <sub>G'</sub> Offroad [mm]	B <sub>i</sub> [mm]								B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]		q <sub>k</sub> [kg/m]
				45	61	77	93	109	125	141				140	170	
58	80	83.5	86	157	173	189	205	221	237	253				200	260	3.0
				269	285	301	317	333	349	365	B <sub>i</sub> + 39	B <sub>i</sub> + 39	290	320	–	
				381	397	413	429	445	461	477				380		6.2
				493	509	525	541	557								

Order example




ME0950 Type · 413 B<sub>i</sub> [mm] · RE Stay variant · 200 KR [mm] · 2850 L<sub>k</sub> [mm] · HS Stay arrangement



Plastic stay RD –  
Frame stay with hinge

- Plastic profile bars with hinge for light to medium loads. Assembly without screws.
- Available customized in **16 mm grid**.
- **Outside:** swivable to both sides.
- **Inside:** release by turning by 90°.

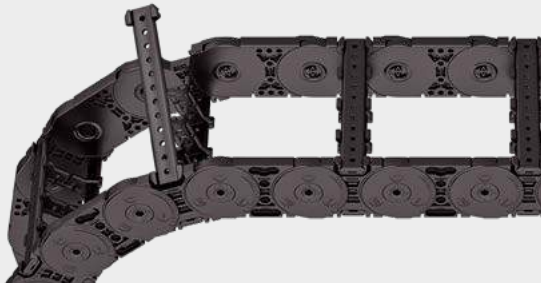


Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)



Stay arrangement on each chain link (**VS: fully-stayed**)



**16 mm** B<sub>i</sub> 45 – 557 mm in **16 mm** width sections

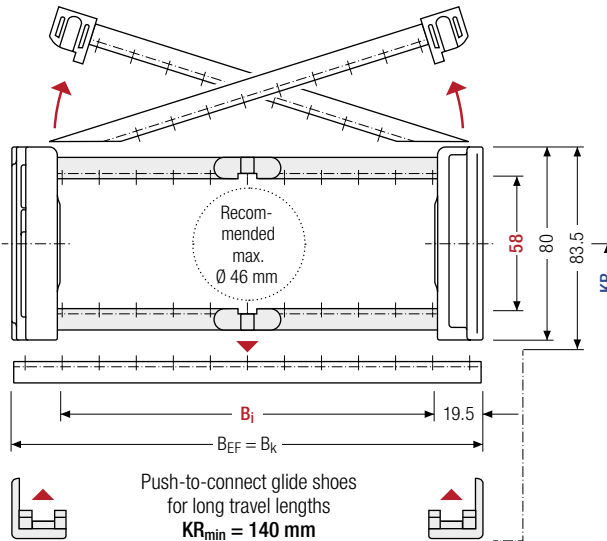

**i** The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

**i** For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

Calculating the cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub> rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G'</sub> [mm]	h <sub>G'</sub> Offroad [mm]	B <sub>i</sub> [mm]								B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]	q <sub>k</sub> [kg/m]
58	80	83.5	86	45	61	77	93	109	125	141				140	170
				157	173	189	205	221	237	253				200	260
				269	285	301	317	333	349	365	B <sub>i</sub> + 39	B <sub>i</sub> + 39		290	320
				381	397	413	429	445	461	477				380	
				493	509	525	541	557							

Order example



MK0950 Type · 413 B<sub>i</sub> [mm] · RD Stay variant · 200 KR [mm] · 2850 L<sub>k</sub> [mm] · HS Stay arrangement

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



## Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).  
As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).  
**(version A).**

The dividers are easily attached to the stay for applications with lateral acceleration and for applications laying on their side by simply turning the frame stay by 180°. The arresting cams click into place in the locking grids in the crossbars (**version B**).  
The groove in the frame stay faces outwards.

### Divider system TS0 without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	5.5	14.5	8.5	—	—
B	6.5	16	10	16	—


The dividers can be moved within the cross section (version A) or fixed (version B).

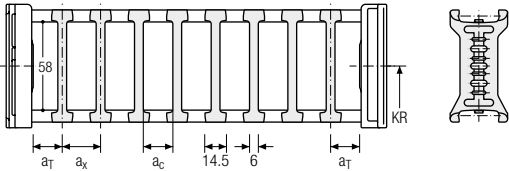

### Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	5.5	25	14.5	8.5	—	2
B	6.5	25	16	10	16	2

The dividers can be moved within the cross section (version A) or fixed (version B).

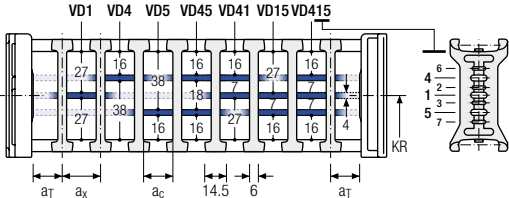


### Divider system TS2 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	5.5	14.5/21	8.5/15	—	2
B	6.5	16/32	10/26	16	2

\* for VR0

With grid distribution (16 mm grid). The dividers are attached by the height separation, the grid can be moved in the cross section (version A) or fixed (version B).

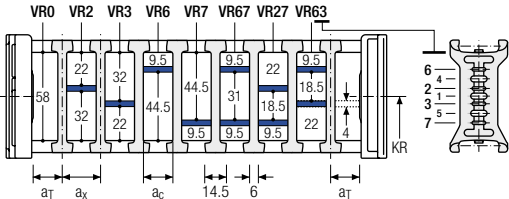

## More product information online



Assembly instructions etc.:  
Additional info via your  
smartphone or check online at  
[tsubaki-kabelschlepp.com/downloads](http://tsubaki-kabelschlepp.com/downloads)



Configure your custom  
cable carrier here:  
**online-engineer.de**




Divider system TS3 with height separation made of plastic partitions


Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4	16 / 42*	8	2

\* For aluminum partitions

The dividers are fixed by the partitions, the complete divider system is movable in the cross section.



Aluminum partitions in 1 mm increments with a<sub>x</sub> > 42 mm are also available.

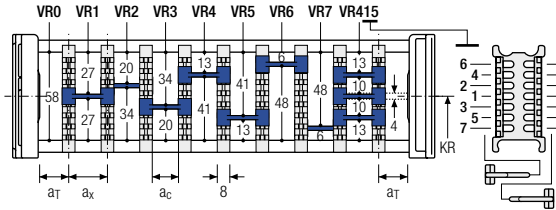

a <sub>x</sub> (center distance of dividers) [mm]											
a <sub>c</sub> (nominal width of inner chamber) [mm]											
16	18	23	28	32	33	38	43	48	58	64	68
8	10	15	20	24	25	30	35	40	50	56	60
78	80	88	96	112	128	144	160	176	192	208	
70	72	80	88	104	120	136	152	168	184	200	

When using **plastic partitions with a<sub>x</sub> > 112 mm**, we recommend an additional center support with a **twin divider** (S<sub>T</sub> = 4 mm). Twin dividers are also suitable for retrofitting in the partition system.

Order example

TS3	A	3	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n <sub>T</sub>	Chamber	a <sub>x</sub>	Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1, TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.



**TOTALTRAX® complete systems**

Benefit from the advantages of the TOTALTRAX® complete system. A complete delivery from one source – with a warranty certificate on request! Learn more at [tsubaki-kabelschlepp.com/totaltrax](https://tsubaki-kabelschlepp.com/totaltrax)



**TRAXLINE® cables for cable carriers**

Hi-flex electric cables which were especially developed, optimized and tested for use in cable carriers can be found at [tsubaki-kabelschlepp.com/traxline](https://tsubaki-kabelschlepp.com/traxline)

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series


XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series


UAT  
series

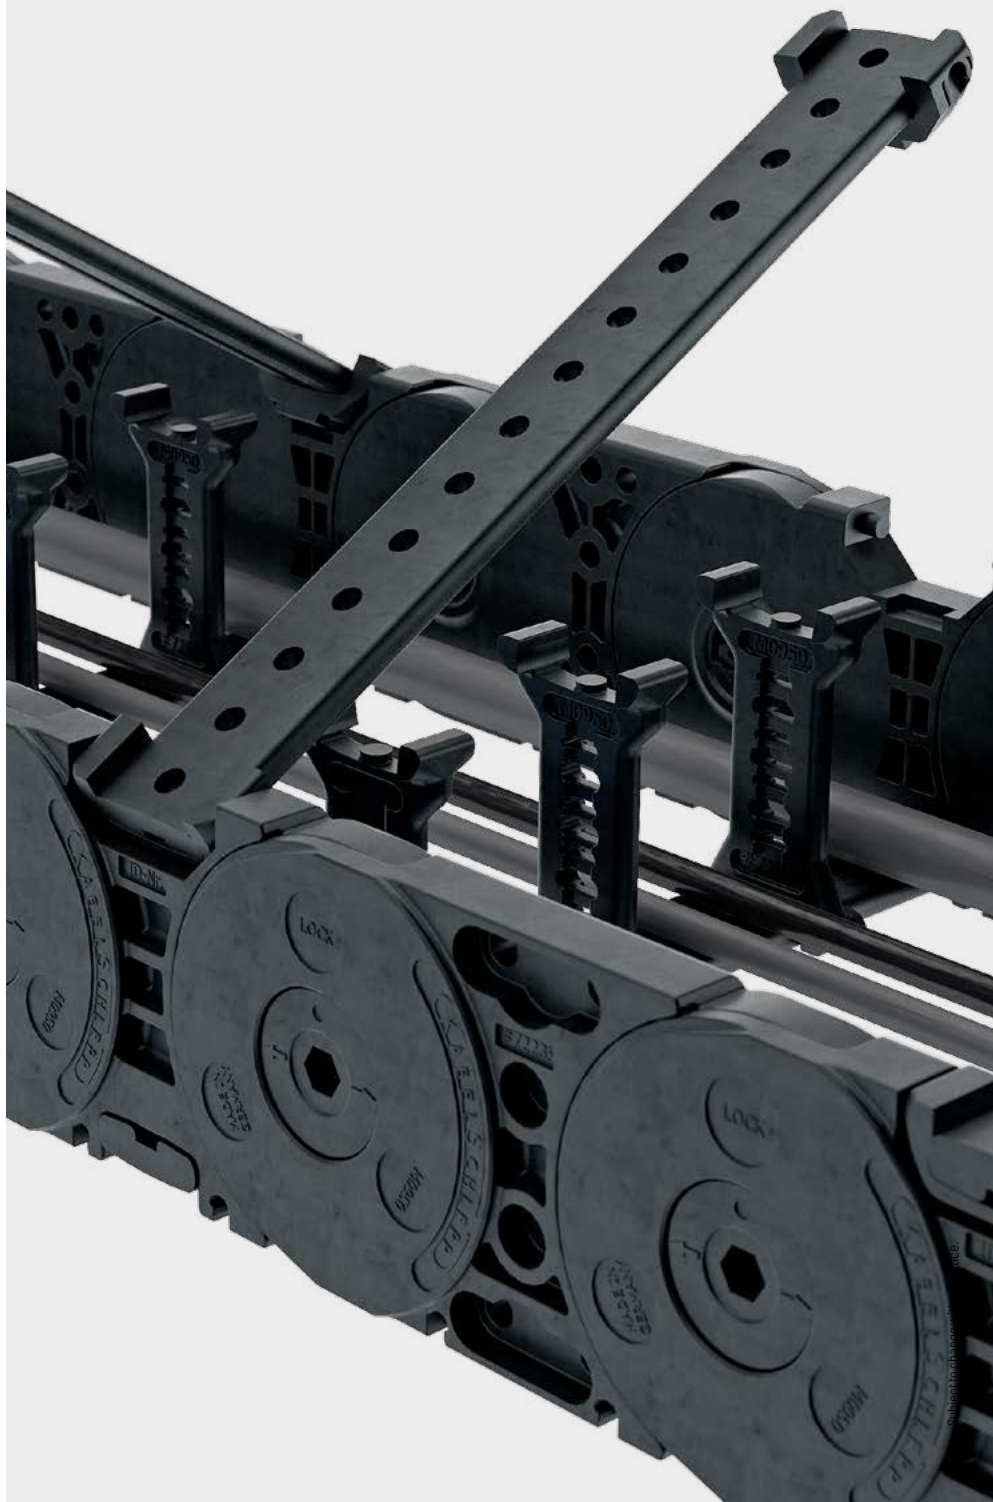




## Universal end connectors UMB – plastic (standard)

The universal mounting brackets (UMB) are made from plastic and can be mounted **from the top, from the bottom, face on or from the side**.

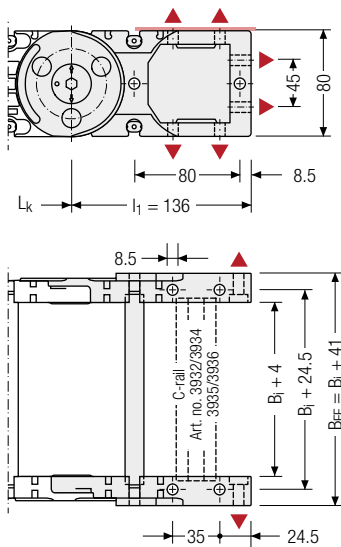


 Recommended tightening torque: 27 Nm for cheese-head screws ISO 4762 - M8 - 8.8

### Connection point

**F** – fixed point  
**M** – driver


### Connection type

**U** – universal mounting bracket



## End connectors – plastic/steel

Plastic link end connector, steel end connector. The connection variants on the fixed point and on the driver can be combined and, if required, changed afterwards.

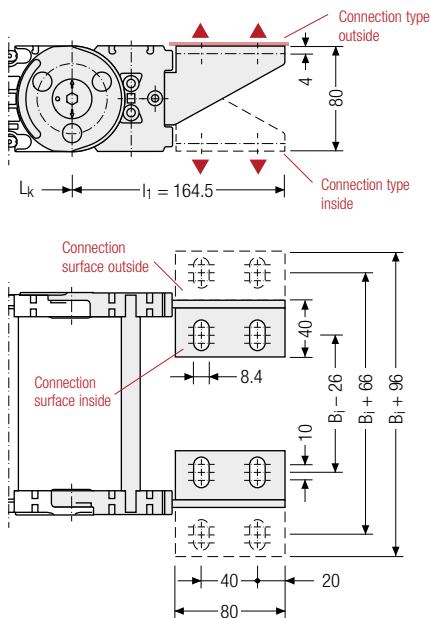

 Assembly options

### Connection point


**F** – fixed point  
**M** – driver

### Connection surface


**I** – connection surface inside  
**A** – connection surface outside


### Connection type

**A** – threaded joint outside (standard)  
**I** – threaded joint inside  
**F** – flange connection



## Order example

	Plastic/steel	F	A	A
UMB	M	U		
End connector	Connection point	Connection type	Connection surface	

 We recommend the use of strain reliefs at the driver and fixed point. See from p. 926.



# M1250



**Pitch**  
125 mm



**Inner heights**  
66 – 76 mm



**Inner widths**  
71 – 800 mm



**Bending radii**  
180 – 500 mm

## Stay variants



**Aluminum stay RS** ..... page 432

### Frame stay, narrow "The standard"

- » Aluminum profile bars for light to medium loads. Assembly without screws.
- » **Outside/inside:** release by turning by 90°.



**Aluminum stay RV** ..... page 436

### Frame stay, reinforced

- » Aluminum profile bars with plastic adapter for medium to high loads and large cable carrier widths. Assembly without screws.
- » **Outside/inside:** release by turning by 90°.



**Aluminum stay RM** ..... page 440

### Frame stay, solid

- » Aluminum profile bars for heavy loads and maximum cable carrier widths. Double threaded joints on both sides "Heavy Duty".
- » **Inside/outside:** Threaded joint easy to release.



**Aluminum stay LG** ..... page 442

### Hole stay, split version

- » Optimum cable routing in the neutral bending line. Split version for easy cable routing. Stays also available unsplit.
- » **Outside/inside:** Screw-fixing easy to release.

## Serie MT



Also available as covered variants with cover system.  
More information can be found in chapter "MT series" from p. 628.



## Stay variants



### Aluminum stay RMAI ..... page 444

#### Mounting frame stay

- » Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- » **Inside:** Screw-fixing easy to release.



### Aluminum stay RMAO ..... page 446

#### Mounting frame stay

- » Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- » **Outside:** Screw-fixing easy to release.



### Aluminum stay RMR ..... page 448

#### Frame rolling stay

- » Aluminum profile bars with rotating plastic rolling stay for highest requirements with gentle cable guiding. Double threaded joint on both sides.
- » **Inside/outside:** threaded joint easy to release.



### Plastic stay RE ..... page 450

#### Frame screw-in stay

- » Plastic profile bars for light to medium loads. Assembly without screws.
- » **Outside/inside:** release by turning by 90°.




### Plastic stay RD ..... page 451

#### Frame stay with hinge

- » Plastic profile bars with hinge for light to medium loads. Assembly without screws.
- » **Outside:** swivable to both sides.
- » **Inside:** release by turning by 90°.


PROTUM®  
seriesK  
seriesUNIFLEX  
Advanced  
seriesM  
seriesTKIP  
seriesXL  
seriesQUANTUM®  
seriesTKR  
seriesTKA  
seriesUAT  
series



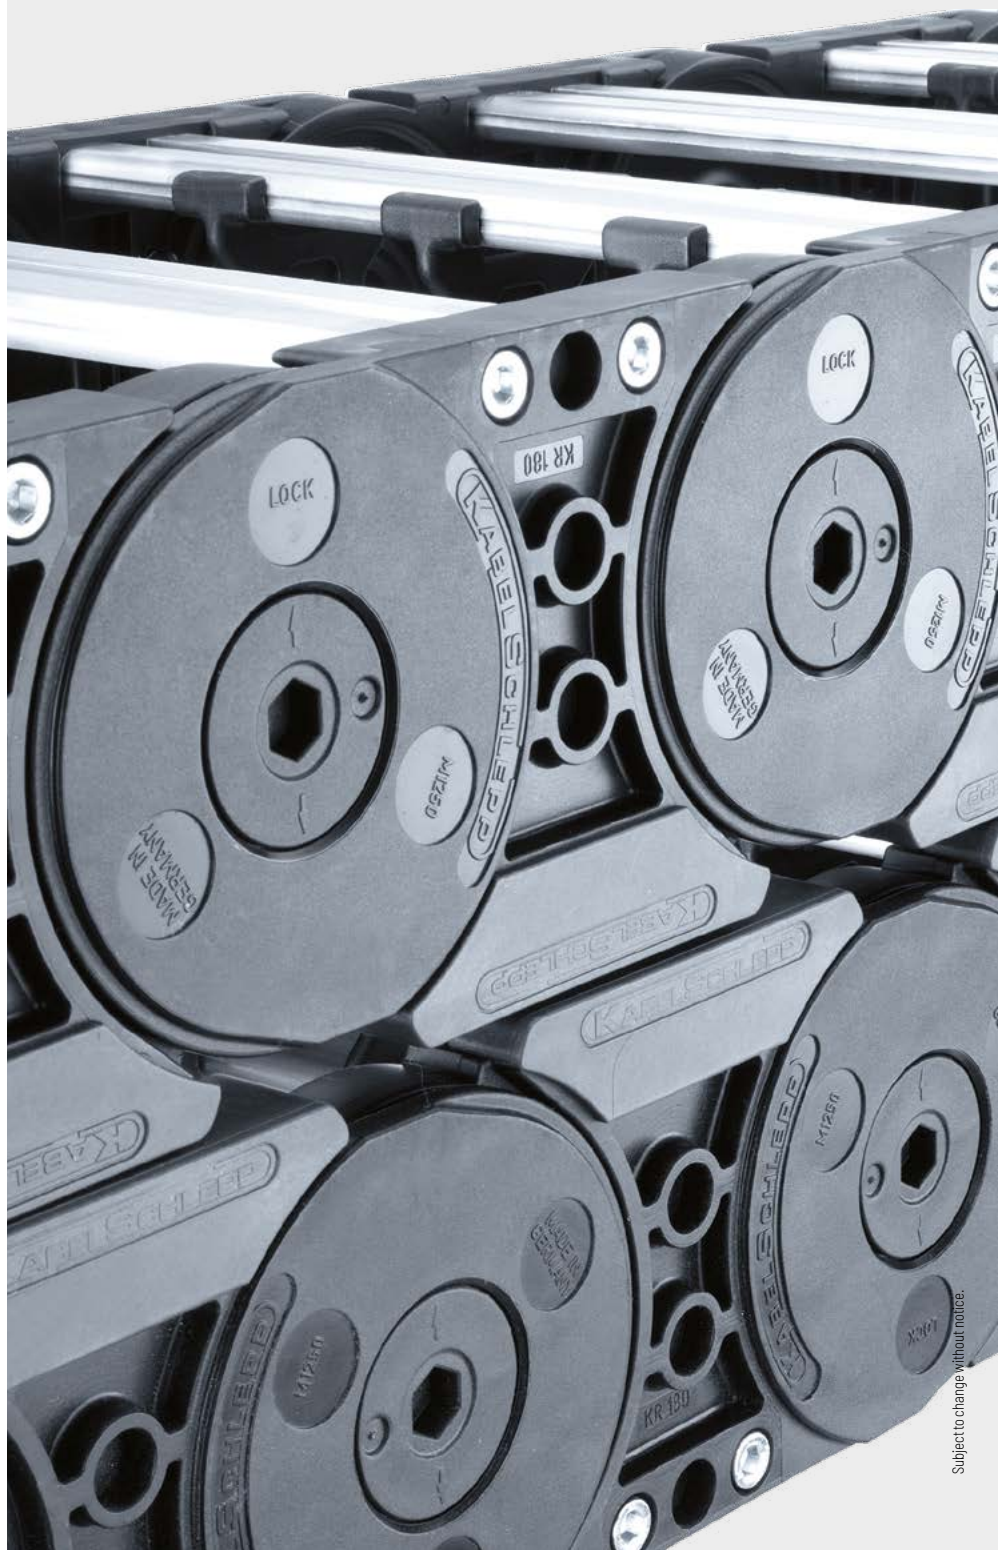



Unsupported arrangement

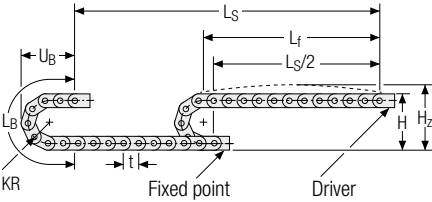


KR [mm]	H [mm]	H <sub>z</sub> [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
180	456	506	816	353
220	536	586	942	393
260	616	666	1067	433
300	696	746	1193	473
340	776	826	1319	513
380	856	906	1444	553
500	1096	1146	1821	673

Load diagram for unsupported length depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight  $q_k = 4.5 \text{ kg/m}$ . For other inner widths, the maximum additional load changes.

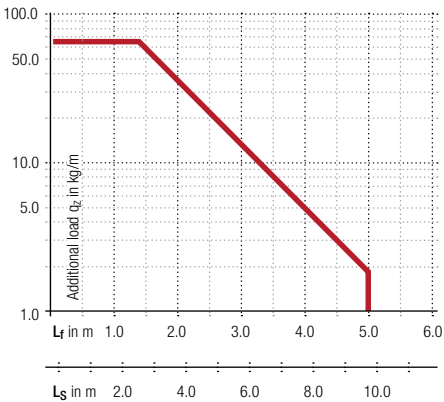

**Speed**  
up to 10 m/s



**Acceleration**  
up to 25 m/s<sup>2</sup>




**Travel length**  
up to 9.7 m



**Additional load**  
up to 65 kg/m

Gliding arrangement | GO module with chain links optimized for gliding

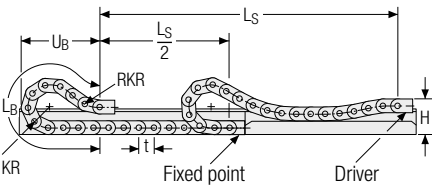

KR [mm]	H [mm]	GO module RKR [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
180	288	500	2000	930
220	288	500	2250	1015
260	288	500	2500	1095
300	288	500	2750	1177
340	288	500	3125	1318
380	288	500	3375	1403
500	288	500	4375	1770



**Speed**  
up to 8 m/s



**Acceleration**  
up to 20 m/s<sup>2</sup>



**Travel length**  
up to 320 m



**Additional load**  
up to 65 kg/m



The gliding cable carrier must be guided in a channel. See p. 866.


The GO module mounted on the driver is a defined sequence of 4 adapted KR/RKR link plates.  
Glide shoes have to be used for gliding applications.




Aluminum stay RS –  
frame stay narrow


- Extremely quick to open and close
- Aluminum profile bars for light to medium loads.  
Assembly without screws.
- Available customized in **1 mm grid**.
- **Outside/inside:** release by turning by 90°.





 Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)

 Stay arrangement on each  
chain link (**VS: fully-stayed**)

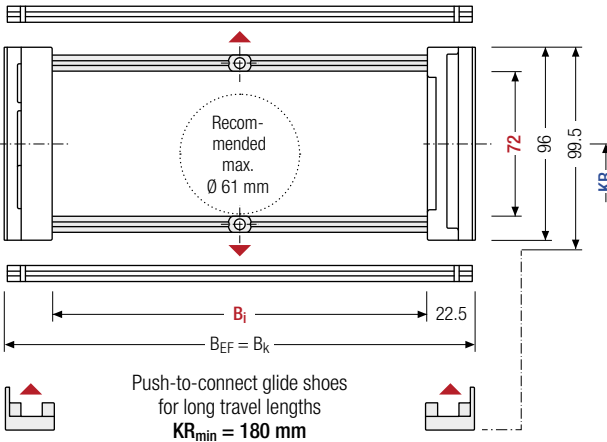 **1 mm** B<sub>i</sub> 75 – 400 mm  
in **1 mm width sections**



 The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

 For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

Calculating the  
cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G'</sub> [mm]	h <sub>G'</sub> Offroad [mm]	B <sub>i</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]				q <sub>k</sub> [kg/m]
72	96	99.5	103	75 – 400	B <sub>i</sub> + 45	B <sub>i</sub> + 45	180	220	260	300	4.10 – 4.97
							340	380	500		

\* in 1 mm width sections

Order example



MC1250  
Type

·

400  
B<sub>i</sub> [mm]

·

RS  
Stay variant

·

300  
KR [mm]

·

4250  
L<sub>k</sub> [mm]

HS  
Stay arrangement



Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).  
As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

For applications with lateral acceleration and rotated by 90°, the dividers can be attached by simply clipping on a socket (available as an accessory).  
The bushing additionally serves as a spacer between the dividers and is available in 1 mm sections between 3 – 50 mm (**version B**).

Divider system TSO without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	7.5	15	10	2


The dividers can be moved in the cross section.

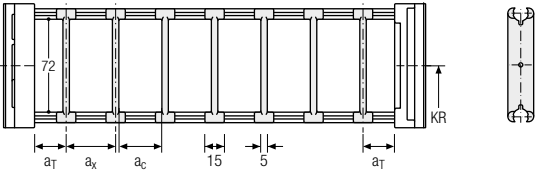

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	7.5	25	15	10	2

The dividers can be moved in the cross section.

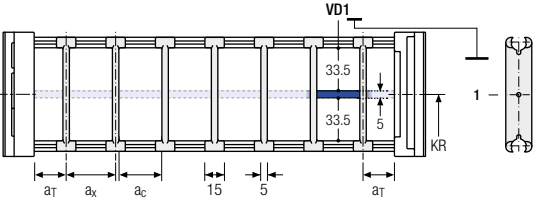

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKiP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



TOTALTRAX® complete systems

Benefit from the advantages of the TOTALTRAX® complete system.  
A complete delivery from one source – with a warranty certificate on request! Learn more at [tsubaki-kabelschlepp.com/totaltrax](https://tsubaki-kabelschlepp.com/totaltrax)



TRAXLINE® cables for cable carriers


Hi-flex electric cables which were especially developed, optimized and tested for use in cable carriers can be found at [tsubaki-kabelschlepp.com/traxline](https://tsubaki-kabelschlepp.com/traxline)




Divider system TS3 with height separation consisting of plastic partitions

As a standard, the divider **version A** is used for vertical partitioning within the cable carrier. The complete divider system can be moved within the cross section.

Divider version A

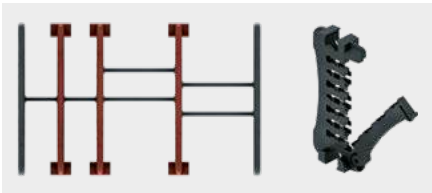



End divider

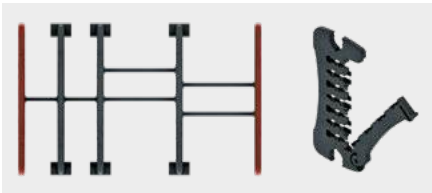

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	6/2*	14	10	2

\* For End divider


The dividers are fixed by the partitions, the complete divider system is movable in the cross section.

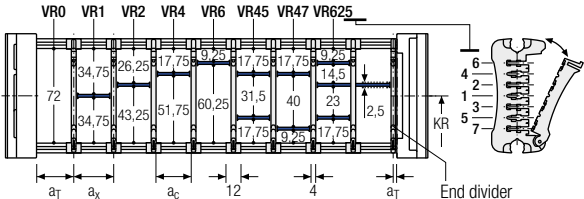

a <sub>x</sub> (center distance of dividers) [mm]															
a <sub>c</sub> (nominal width of inner chamber) [mm]															
14	16	19	23	24	28	29	32	33	34	38	39	43	44	48	49
54	58	59	64	68	69	74	78	79	80	84	88	89	94	96	99
112	154	155	160	164	165	170	174	175	176	180	184	185	190	192	195
108															

When using partitions with a<sub>x</sub> > 49 mm we recommended an additional preferential central support.

Order example



TS3

A

3

K1

34

VR1

⋮

K4

38

VR3

Divider system

Version

n<sub>T</sub>

Chamber


a<sub>x</sub>

Height separation

Please state the designation of the divider system (**TS0**, **TS1**,...), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1**, **TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.



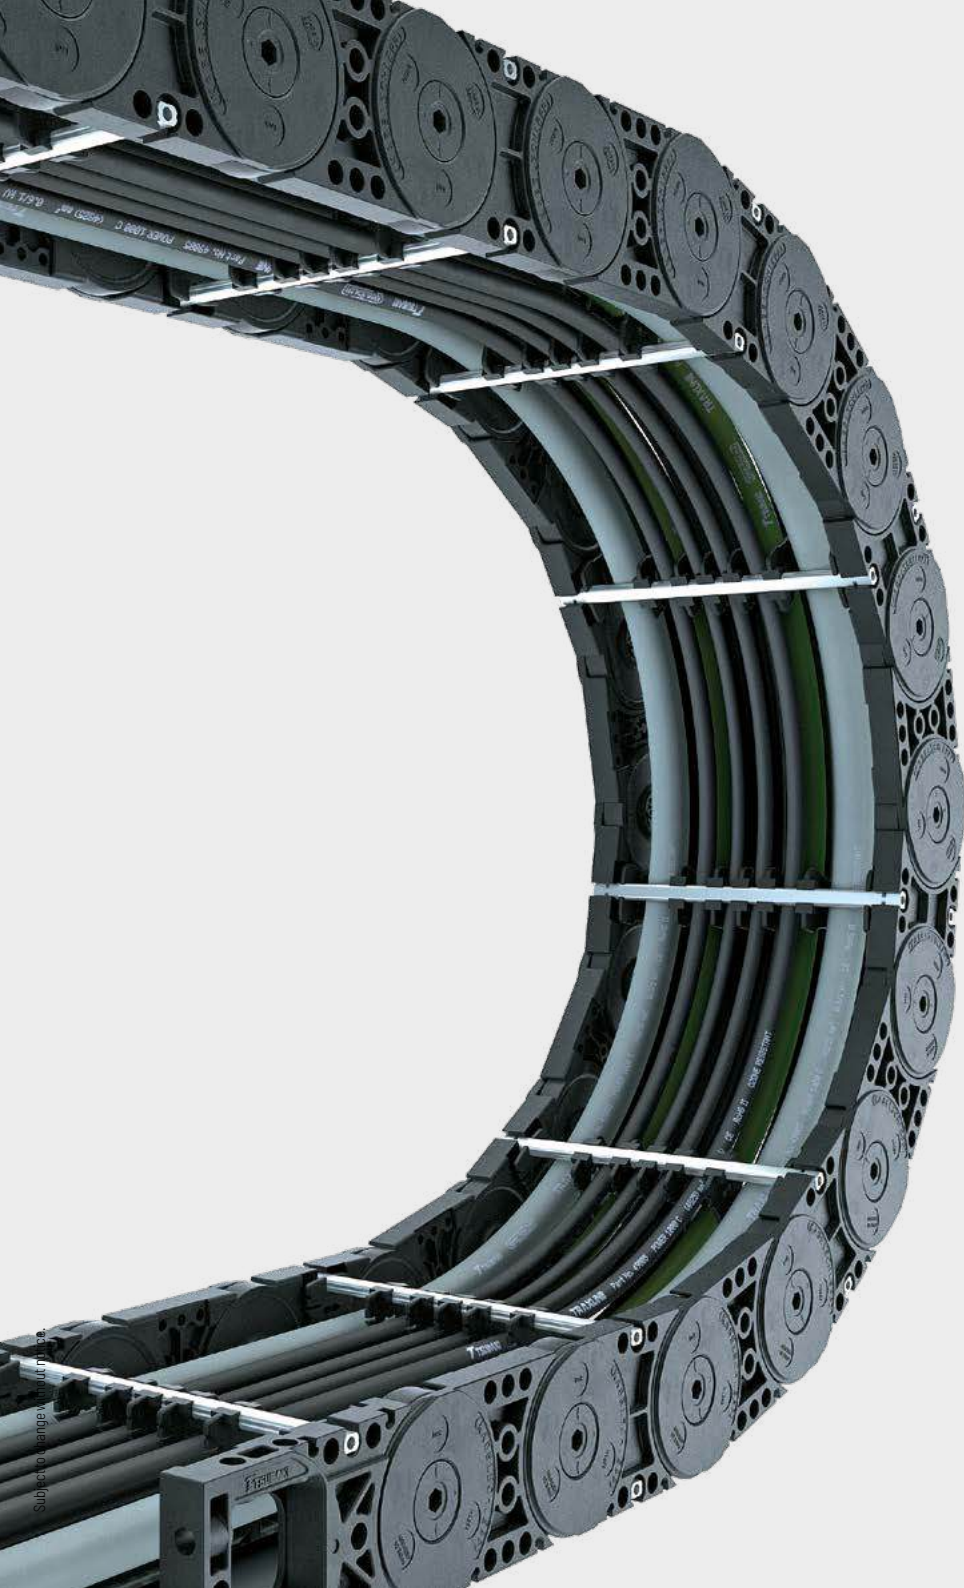

Subject to change without notice.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

**M**  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



Aluminum stay RV –  
frame stay reinforced

- Aluminum profile bars with plastic adapter for medium to high loads and large cable carrier widths. Assembly without screws.
- Available customized in **1 mm grid**.
- **Outside/inside:** release by turning by 90°.




Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)



Stay arrangement on each chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 100 – 600 mm in **1 mm width sections**

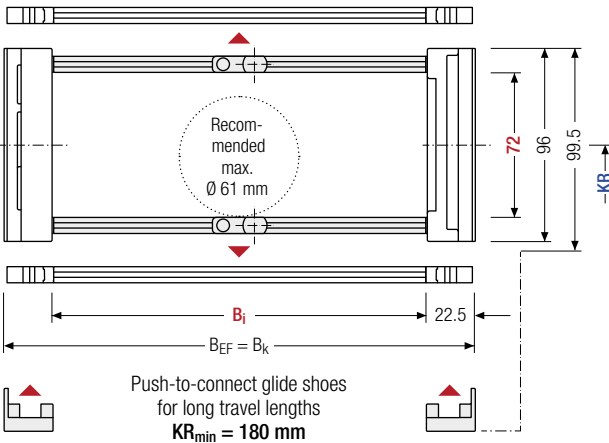

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

Calculating the cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub> rounded to pitch t

$h_i$ [mm]	$h_G$ [mm]	$h_{G'}$ [mm]	$h_{G'}$ Offroad [mm]	$B_i$ [mm]*	$B_k$ [mm]	$B_{EF}$ [mm]	$KR$ [mm]				$q_k$ [kg/m]
72	96	99.5	103	100 – 600	$B_i + 45$	$B_i + 45$	180	220	260	300	4.40 – 6.18
							340	380	500		

\* in 1 mm width sections

Order example



MC1250 Type · 400 B<sub>i</sub> [mm] · RV Stay variant · 300 K<sub>R</sub> [mm] · 4250 L<sub>k</sub> [mm] · HS Stay arrangement



Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).

As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

Divider system TSO without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	8	16	10	2


The dividers can be moved in the cross section.

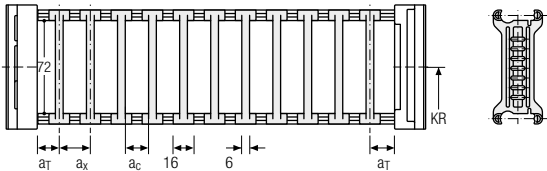

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	8	25	16	10	2

The dividers can be moved in the cross section.

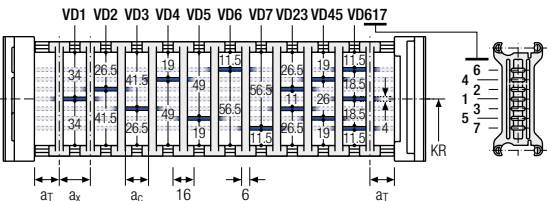


Divider system TS2 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	8	21	15	2


With grid distribution (1 mm grid).  
The dividers are attached by the height separation, the grid can be moved in the cross section.

Sliding dividers are optionally available (thickness of divider = 6 mm).

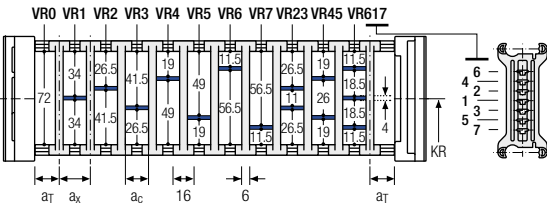

TOTALTRAX® complete systems

Benefit from the advantages of the TOTALTRAX® complete system.  
A complete delivery from one source – with a warranty certificate on request! Learn more at [tsubaki-kabelschlepp.com/totaltrax](https://tsubaki-kabelschlepp.com/totaltrax)



TRAXLINE® cables for cable carriers

Hi-flex electric cables which were especially developed, optimized and tested for use in cable carriers can be found at [tsubaki-kabelschlepp.com/traxline](https://tsubaki-kabelschlepp.com/traxline)

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKHP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series


UAT  
series




Divider system TS3 with height separation made of plastic partitions

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4	16/42*	8	2

\* For aluminum partitions

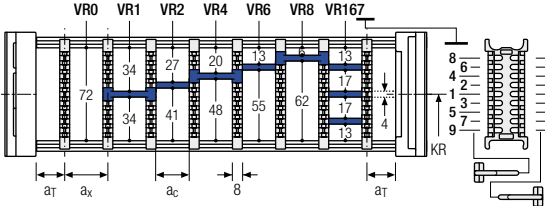

The dividers are fixed by the partitions, the complete divider system is movable in the cross section.



Aluminum partitions in 1 mm increments with **a<sub>x</sub> > 42 mm** are also available.

a <sub>x</sub> (center distance of dividers) [mm]											
a <sub>c</sub> (nominal width of inner chamber) [mm]											
16	18	23	28	32	33	38	43	48	58	64	68
8	10	15	20	24	25	30	35	40	50	56	60
78	80	88	96	112	128	144	160	176	192	208	
70	72	80	88	104	120	136	152	168	184	200	

When using **plastic partitions with a<sub>x</sub> > 112 mm**, we recommend an additional center support with a **twin divider** (S<sub>T</sub> = 4 mm). Twin dividers are also suitable for retrofitting in the partition system.

Order example

TS3	.	A	.	3	.	K1	.	34	-	VR1
						⋮		⋮		⋮
						K4	.	38	-	VR3
Divider system		Version		n <sub>T</sub>		Chamber		a <sub>x</sub>		Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1, TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.

### More product information online

Assembly instructions etc.: Additional info via your smartphone or check online at [tsubaki-kabelschlepp.com/support](https://tsubaki-kabelschlepp.com/support)

Configure your custom cable carrier here: [online-engineer.de](https://online-engineer.de)





Subject to change without notice.

UAT  
series

TKA  
series

TKR  
series

QUANTUM®  
series

XL  
series

TKIP  
series

**M**  
series

UNIFLEX  
Advanced  
series

K  
series


PROTUM®  
series



Aluminum stay RM –  
frame stay solid


- Aluminum profile bars for heavy loads and maximum cable carrier widths. Double threaded joints on both sides “Heavy Duty”.
- Available customized in **1 mm grid**.
- **Inside/outside:** Threaded joint easy to release.


**HEAVY DUTY**  
TSUBAKI KABELSCHLEPP

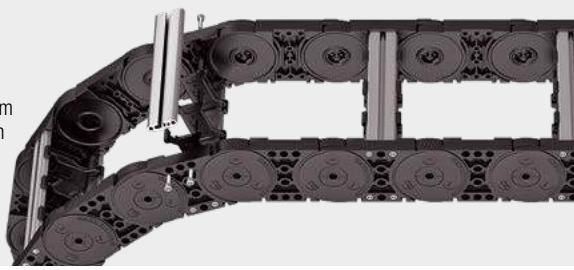



 Stay arrangement on every 2nd chain link, **standard** (HS: half-stayed)

 Stay arrangement on each chain link (**VS: fully-stayed**)

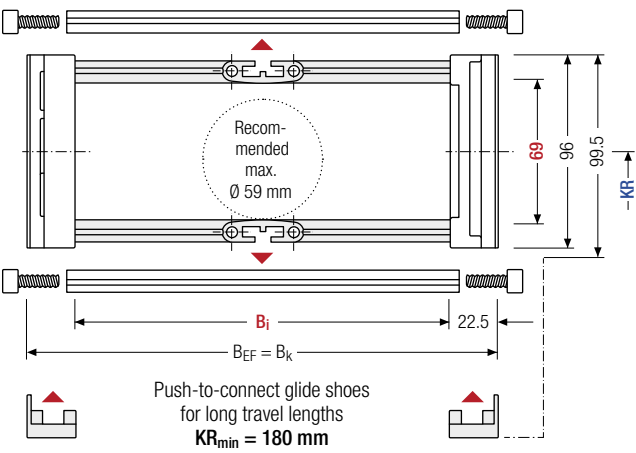 **1 mm** B<sub>i</sub> 100 – 800 mm in **1 mm width sections**



 The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

 For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

Calculating the cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub> rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G</sub> * [mm]	h <sub>G</sub> Offroad [mm]	B <sub>i</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]				q <sub>k</sub> [kg/m]
69	96	99.5	103	100 – 800	B <sub>i</sub> + 45	B <sub>i</sub> + 45	180	220	260	300	4.14 – 8.48
							340	380	500		

\* in 1 mm width sections

Order example



MC1250  
Type

•

400  
B<sub>i</sub> [mm]

•

RM  
Stay variant

•

300  
KR [mm]

•

4250  
L<sub>k</sub> [mm]

•

HS  
Stay arrangement




Divider systems

As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS). As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

Divider system TSO without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	10	20	15	–


The dividers can be moved in the cross section.

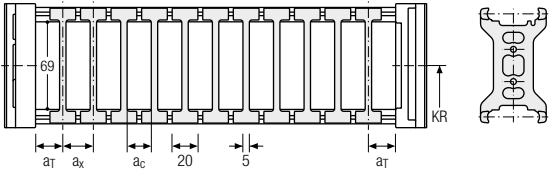

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	6	25	12	8	2

The dividers can be moved in the cross section.

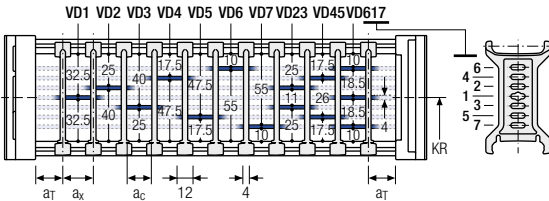


Divider system TS2 with partial height separation


Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	7	21	15	2

With grid distribution (1 mm grid). The dividers are attached by the height separation, the grid can be moved in the cross section.

Sliding dividers are optionally available (thickness of divider = 4 mm).

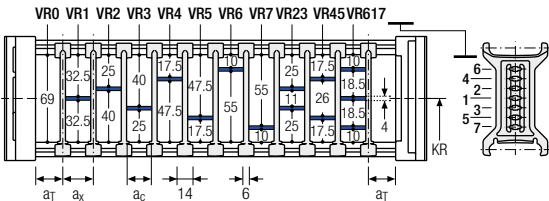

Order example



TS2	A	3	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n <sub>T</sub>	Chamber	a <sub>x</sub>	Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1 – TS2**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKHP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



Aluminum stay LG –  
Hole stay, split version

- Optimum cable routing in the neutral bending line.  
Split version for easy cable routing. Stays also available unsplit.
- Available customized in **1 mm width sections**.
- **Outside/inside:** Screw-fixing easy to release.




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(**HS:** half-stayed)



Stay arrangement on each  
chain link (**VS:** fully-stayed)



**1 mm** B<sub>i</sub> 100 – 800 mm  
in **1 mm width sections**

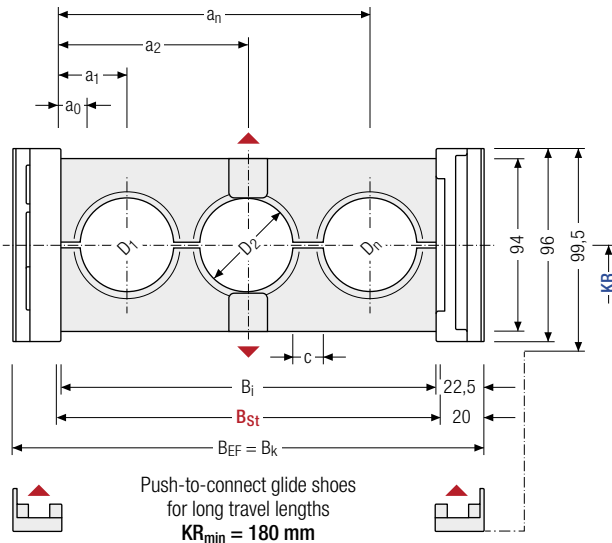

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable  
carrier length

Cable carrier length  $L_k$

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length  $L_k$   
rounded to pitch  $t$

Calculating  
the stay width

Stay width  $B_{St}$

$$B_{St} = \sum D + \sum c + 2 a_0$$

D <sub>max</sub> [mm]	D <sub>min</sub> [mm]	h <sub>G</sub> [mm]	B <sub>i</sub> [mm]	B <sub>St</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	c <sub>min</sub> [mm]	a <sub>0</sub> min [mm]	KR [mm]	q <sub>k</sub> 50 %** [kg/m]
76	12	96	100 – 800	105 – 805	B <sub>St</sub> + 40	B <sub>St</sub> + 40	4	12	180 220 260 300 340 380 500	4.75 – 11.17

\* in 1 mm width sections

\*\* Hole ratio of the hole stay approx. 50 %

Order example



**MC1250**

Type

**400**

B<sub>i</sub> [mm]

**LG**

Stay variant

**300**

KR [mm]


**4250**

L<sub>k</sub> [mm]

**HS**

Stay arrangement



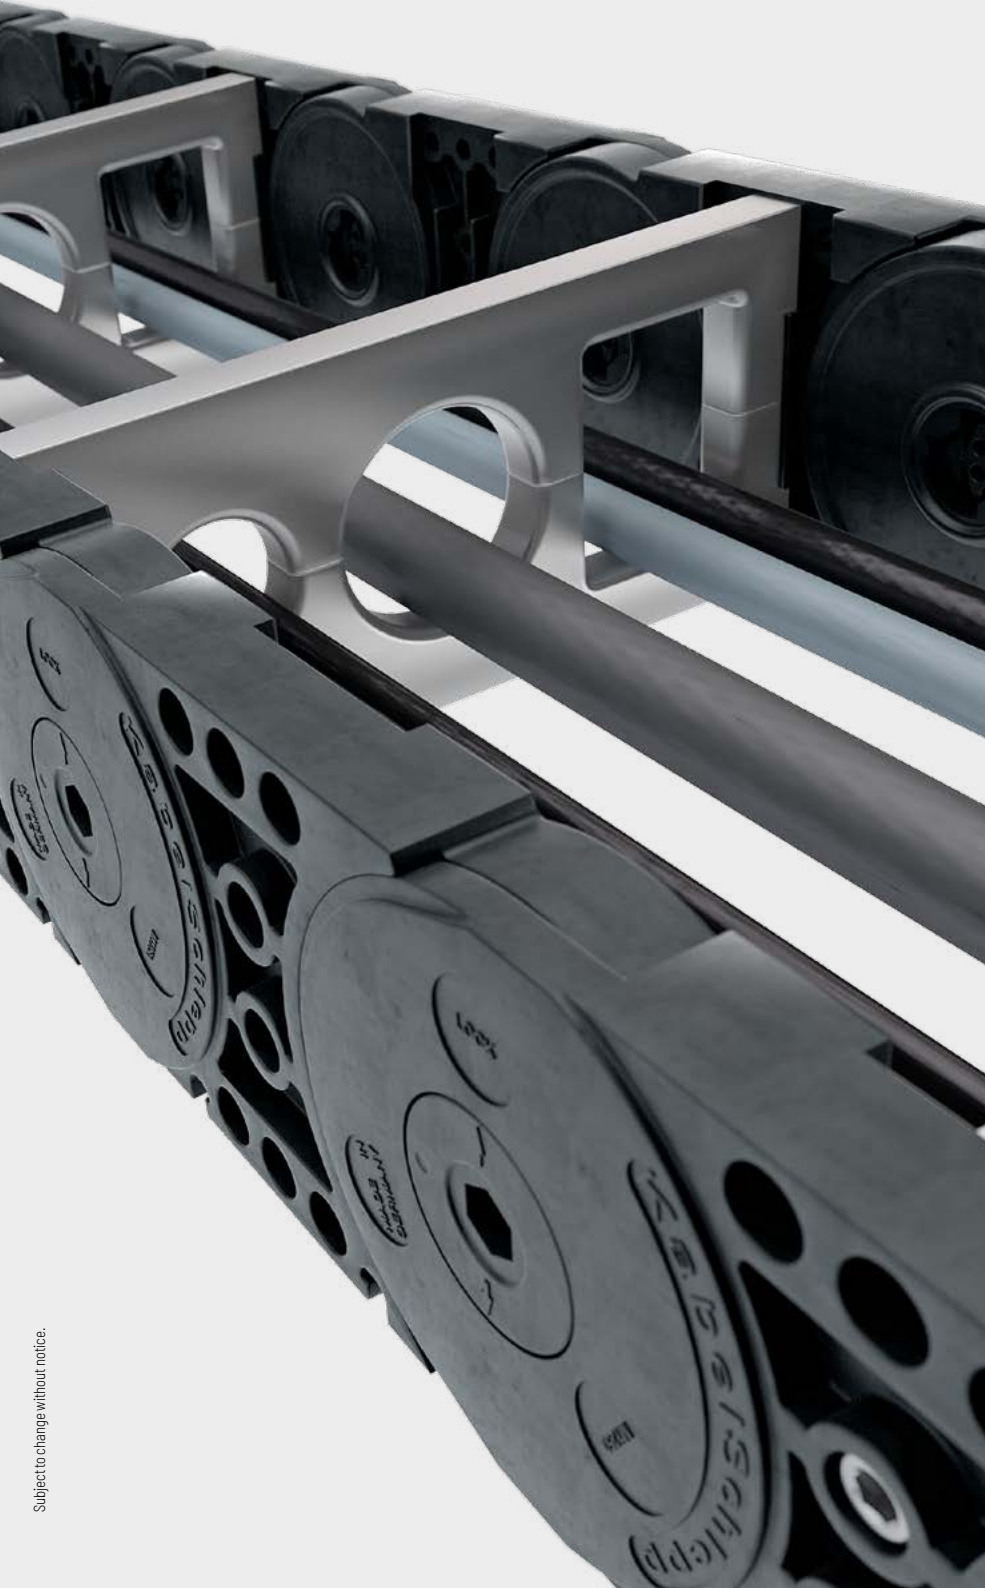

Subject to change without notice.

UAT series	TKA series	TKR series	QUANTUM® series	XL series	TKIP series	<b>M series</b>	UNIFLEX Advanced series	K series	PROTUM® series
------------	------------	------------	-----------------	-----------	-------------	-----------------	-------------------------	----------	----------------



Aluminum stay RMAI –  
mounting frame stay

- Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- The mounting frame stay is mounted on the inside in the bending radius.
- Available customized in **1 mm width sections**.
- **Inside:** Screw-fixing easy to release.




Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)



Stay arrangement on each chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 200 – 800 mm in **1 mm width sections**

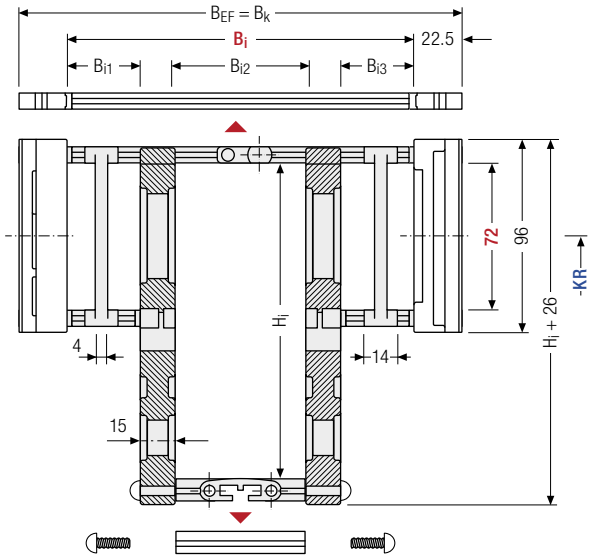

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length  $L_k$

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length  $L_k$  rounded to pitch  $t$

Intrinsic cable carrier weight

Determining the intrinsic cable carrier weight strongly depends on the selected stay arrangement. Please contact us.

$h_i$ [mm]	$H_i$ [mm]	$h_G$ [mm]	$B_i$ [mm]	$B_{i1}$ min [mm]	$B_{i3}$ min [mm]	$B_K$ [mm]	$B_{EF}$ [mm]	$KR$ [mm]			
72	130 200	160	200 – 800	40	40	$B_i + 45$	$B_i + 45$	180	220	260	300
		96						340	380	500	


Order example



<b>MC1250</b> Type	·	<b>400</b> $B_i$ [mm]	·	<b>RMAI</b> Stay variant	·	<b>300</b> $KR$ [mm]	·	<b>4250</b> $L_k$ [mm]	·	<b>HS</b> Stay arrangement
-----------------------	---	--------------------------	---	-----------------------------	---	-------------------------	---	---------------------------	---	-------------------------------



**RMAI – assembly to the inside:**  
Gliding application is not possible when using assembly version RMAI.  
Observe minimum KR:  
H<sub>i</sub> = 130 mm: KR<sub>min</sub> = 180 mm  
H<sub>i</sub> = 160 mm: KR<sub>min</sub> = 180 mm  
H<sub>i</sub> = 200 mm: KR<sub>min</sub> = 220 mm



PROTUM® series	K series	UNIFLEX Advanced series	M series	TKIP series	XL series	QUANTUM® series	TKR series	TKA series	UAT series
----------------	----------	-------------------------	----------	-------------	-----------	-----------------	------------	------------	------------



Aluminum stay RMAO –  
mounting frame stay

- Aluminum profile bars with plastic mounting frame stays for guiding very large cable diameters.
- The mounting frame stay is mounted on the outside in the bending radius.
- Available customized in **1 mm width sections**.
- **Outside:** Screw-fixing easy to release.




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 200 – 800 mm  
in **1 mm width sections**

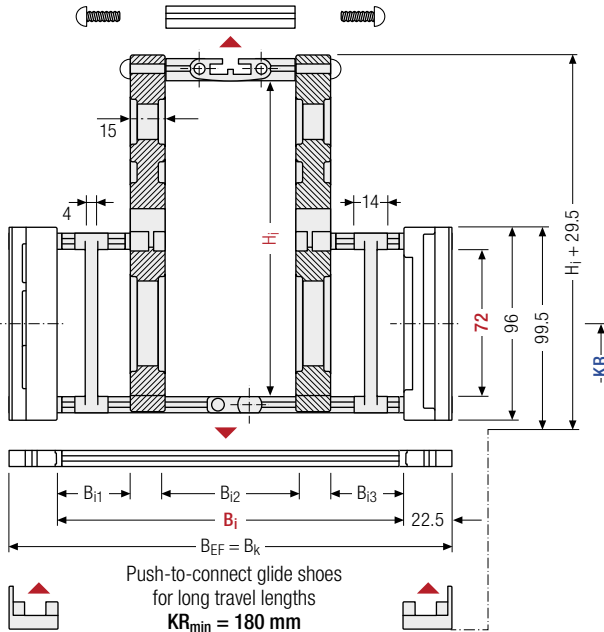

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable  
carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t



Intrinsic cable carrier  
weight

Determining the intrinsic cable carrier weight strongly depends on the selected stay arrangement. Please contact us.

$h_i$ [mm]	$H_i$ [mm]		$h_G$ [mm]	$B_i$ [mm]	$B_{i1 \text{ min}}$ [mm]	$B_{i3 \text{ min}}$ [mm]	$B_K$ [mm]	$B_{EF}$ [mm]	KR [mm]			
72	130	160	96	200 – 800	40	40	$B_i + 45$	$B_i + 45$	180	220	260	300
	200								340	380	500	

Order example



**MC1250**  
Type

**400**  
B<sub>i</sub> [mm]

**RMAO**  
Stay variant

**300**  
KR [mm]

**4250**  
L<sub>k</sub> [mm]

**HS**  
Stay arrangement




**RMAO – assembly to the outside:**

The cable carrier has to rest on the side bands and not on the stays.

Guiding in a **channel is required** for support.  
Please contact our technical support at [technik@kabelschlepp.de](mailto:technik@kabelschlepp.de) to find the corresponding guide channel.

Please note the operating and installation height.



Subject to change without notice.

PROTUM® series	K series	UNIFLEX Advanced series	M series	TKIP series	XL series	QUANTUM® series	TKR series	TKA series	UAT series
----------------	----------	-------------------------	----------	-------------	-----------	-----------------	------------	------------	------------



Aluminum stay RMR –  
Frame rolling stay

- Aluminum profile bars with rotating plastic rolling stay for highest requirements with gentle cable guiding. Double threaded joint on both sides.
- Available customized in **1 mm grid**.
- **Inside/outside:** Threaded joint easy to release.




Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)



Stay arrangement on each chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 100 – 800 mm in **1 mm** width sections

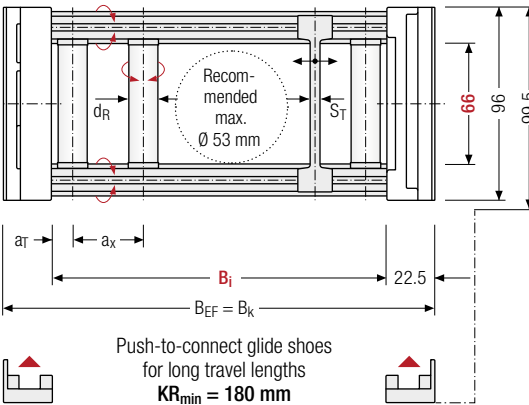

Calculating the cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub> rounded to pitch t



The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.



For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G'</sub> [mm]	h <sub>G'</sub> Offroad [mm]	B <sub>i</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	d <sub>R</sub> [mm]	S <sub>T</sub> [mm]	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	KR [mm]	q <sub>k</sub> [kg/m]
66	96	99.5	103	100 – 800	B <sub>i</sub> + 45	B <sub>i</sub> + 45	10	6	6.5	37	180 220 260 300 340 380 500	4.13 – 8.39

\* in 1 mm width sections

Order example



MC1250

Type

400

B<sub>i</sub> [mm]

RMR

Stay variant

300

KR [mm]

4250

L<sub>k</sub> [mm]

HS

Stay arrangement





Subject to change without notice.

UAT  
series

TKA  
series

TKR  
series

QUANTUM®  
series

XL  
series

TKIP  
series

**M**  
series

UNIFLEX  
Advanced  
series

K  
series

PROTUM®  
series



- Plastic profile bars for light to medium loads. Assembly without screws.
- Available customized in **16 mm grid**.
- **Outside/inside:** release by turning by 90°.



Stay arrangement on every 2<sup>nd</sup> chain link, **standard** (HS: half-stayed)



Stay arrangement on each chain link (**VS: fully-stayed**)



**16 mm**  $B_i$  71 – 551 mm  
in **16 mm** width sections

series  
PROTUM®


K series


UNIFLEX  
Advanced  
series


Series M

TKHP  
seriesXL  
seriesseries  
QUANTUM®TKR  
series

TKA series

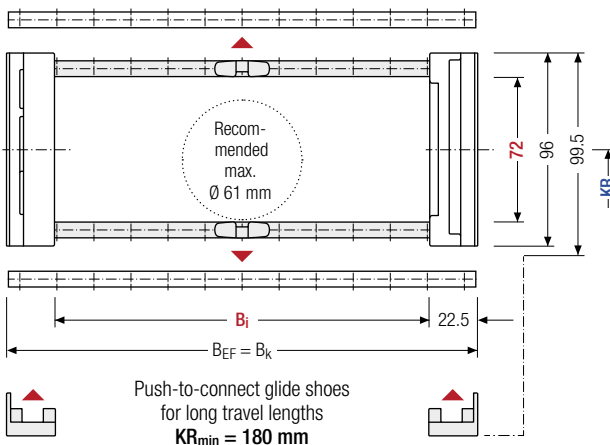series  
UAT

 The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

 For rough environmental conditions, we recommend the use of OFFROAD glide shoes with 80 % higher wear volume.

### Calculating the cable carrier length

Cable carrier length  $L_k$ 

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length  $L_k$   
rounded to pitch  $t$

$h_i$ [mm]	$h_g$ [mm]	$h_{g'}$ [mm]	$h_{g'}$ Offroad [mm]	$B_i$ [mm]						$B_k$ [mm]	$B_{EF}$ [mm]	$KR$ [mm]	$q_k$ [kg/m]		
72	96	99.5	103	71	87	103	119	135	151	167	$B_i$ + 45	$B_i$ + 45	180	220	4.30 – 5.80
				183	199	215	231	247	263	279			260	300	
				295	311	327	343	359	375	391			340	380	
				407	423	439	455	471	487	503			500		
				519	535	551									

## Order example



**ME1250**  
Type

407  
B<sub>i</sub> [mm]

RE
Stay variant

300  
KR [mm]4250  
L<sub>k</sub> [mm]

HS
Stay arrangement



Plastic stay RD –  
Frame stay with hinge

- Plastic profile bars with hinge for light to medium loads. Assembly without screws.
- Available customized in **16 mm grid**.
- **Outside:** swivable to both sides.
- **Inside:** release by turning by 90°.




Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**16 mm** B<sub>i</sub> 71 – 551 mm  
in **16 mm** width sections

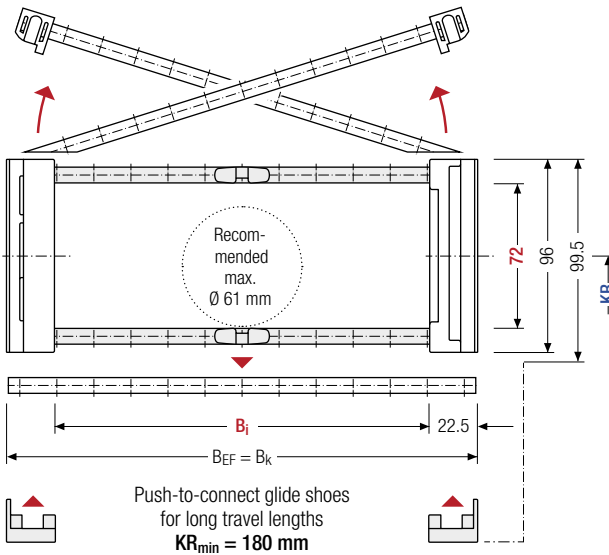

The maximum cable diam-  
eter strongly depends on  
the bending radius and the  
desired cable type.  
Please contact us.



For rough environmental  
conditions, we recommend  
the use of OFFROAD glide  
shoes with 80 % higher  
wear volume.

Calculating the  
cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

$h_i$ [mm]	$h_G$ [mm]	$h_{G'}$ [mm]	$h_{G'}$ Offroad [mm]	$B_i$ [mm]							$B_k$ [mm]	$B_{EF}$ [mm]	$KR$ [mm]	$q_k$ [kg/m]	
72	96	99.5	103	71	87	103	119	135	151	167	$B_i$ + 45	$B_i$ + 45	180	220	4.30 — 5.80
				183	199	215	231	247	263	279			260	300	
				295	311	327	343	359	375	391			340	380	
				407	423	439	455	471	487	503			500		
				519	535	551									

Order example



**MK1250**  
Type

**407**  
B<sub>i</sub> [mm]

**RD**  
Stay variant

**300**  
KR [mm]

**4250**  
L<sub>k</sub> [mm]

**HS**  
Stay arrangement



Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS).  
As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

The dividers are easily attached to the stay for applications with lateral acceleration and for applications laying on their side by simply turning the frame stay by 180°. The arresting cams click into place in the locking grids in the crossbars (**version B**).  
The groove in the frame stay faces outwards.

Divider system TS0 without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	η <sub>T</sub> min
A	5	14.5	6.5	—	—
B	19.5	16	8	16	—


The dividers can be moved within the cross section (version A) or fixed (version B).

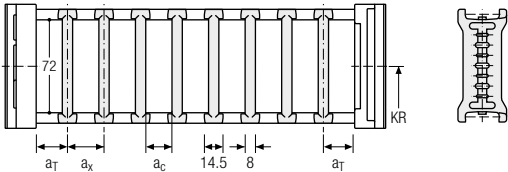

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	η <sub>T</sub> min
A	5	25	14.5	6.5	—	2
B	19.5	19.5	16	8	16	2

The dividers can be moved within the cross section (version A) or fixed (version B).

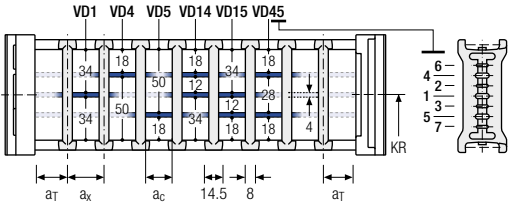


Divider system TS2 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	η <sub>T</sub> min
A	5	14.5*20	6.5*12	—	2
B	19.5	16*32	8*24	16	2

\* for VR0

With grid distribution (16 mm grid). The dividers are fixed by the height separation, the complete divider system is movable in the cross section (version A) or fixed (version B).

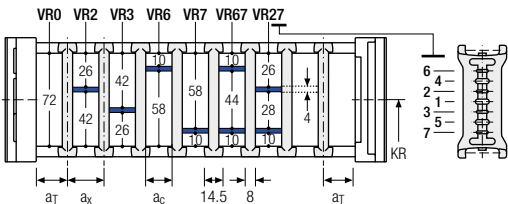




Divider system TS3 with height separation made of plastic partitions


Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	4	16 / 42*	8	2

\* For aluminum partitions

The dividers are fixed by the partitions, the complete divider system is movable in the cross section.




Aluminum partitions in 1 mm increments with **a<sub>x</sub> > 42 mm** are also available.

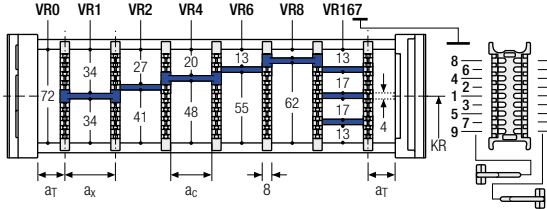

a <sub>x</sub> (center distance of dividers) [mm]											
a <sub>c</sub> (nominal width of inner chamber) [mm]											
16	18	23	28	32	33	38	43	48	58	64	68
8	10	15	20	24	25	30	35	40	50	56	60
78	80	88	96	112	128	144	160	176	192	208	
70	72	80	88	104	120	136	152	168	184	200	

When using **plastic partitions with a<sub>x</sub> > 112 mm**, we recommend an additional center support with a **twin divider** (S<sub>T</sub> = 4 mm). Twin dividers are also suitable for retrofitting in the partition system.

Order example



TS3	A	3	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n <sub>T</sub>	Chamber	a <sub>x</sub>	Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n<sub>T</sub>]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a<sub>T</sub>/a<sub>x</sub>] (as seen from the driver).

If using divider systems with height separation (**TS1, TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.

More product information online



Assembly instructions etc.: Additional info via your smartphone or check online at [tsubaki-kabelschlepp.com/downloads](https://tsubaki-kabelschlepp.com/downloads)



Configure your custom cable carrier: here [online-engineer.de](https://online-engineer.de)

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKiP  
series

XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series

UAT  
series



PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

**M**  
series

TKHP  
series


XL  
series

QUANTUM®  
series

TKR  
series

TKA  
series


UAT  
series

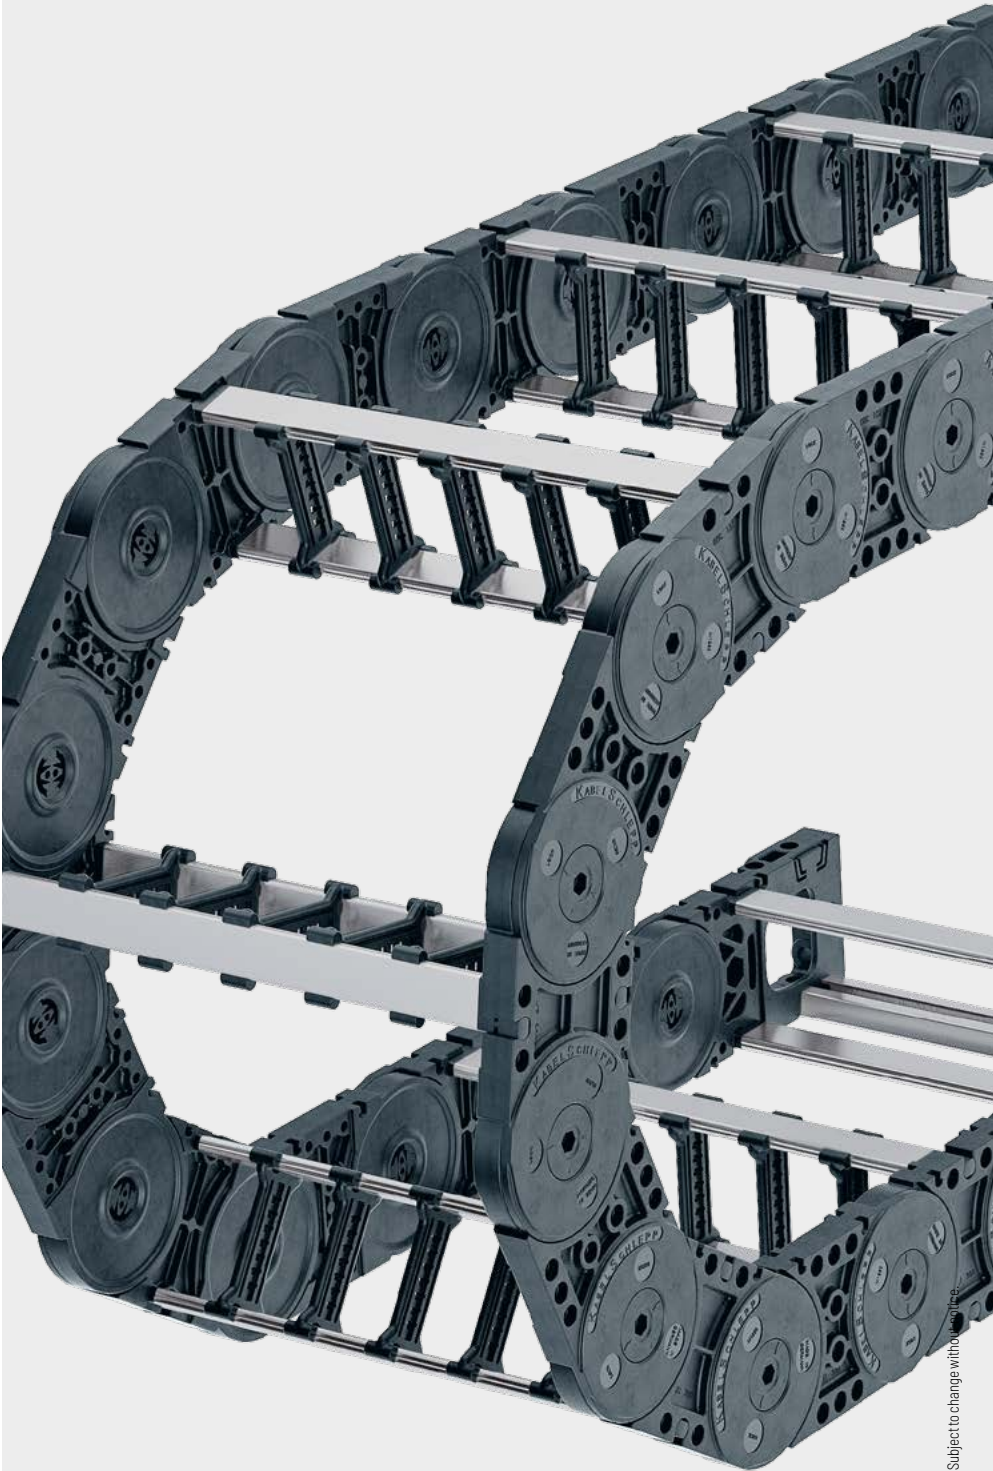




Universal end connectors UMB – plastic  
(standard)

The universal mounting brackets (UMB) are made from plastic and can be mounted **from the top, from the bottom, face on or from the side**.

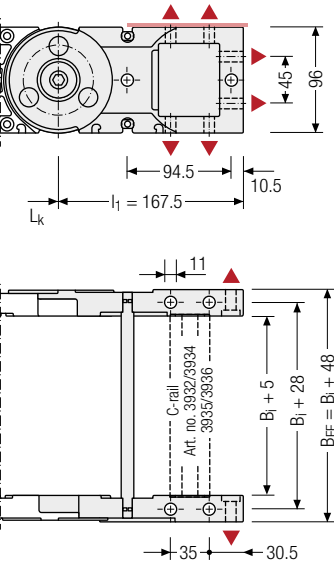


 Recommended tightening torque: 54 Nm  
for cheese-head screws ISO 4762 - M10 - 8.8

Connection point

**F** – fixed point  
**M** – driver


Connection type


**U** – universal mounting bracket



End connectors – plastic/steel

Plastic link end connector, steel end connector. The connection variants on the fixed point and on the driver can be combined and, if required, changed afterwards.

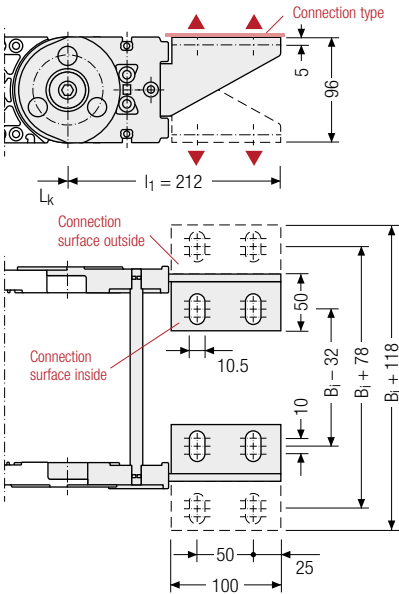

 Assembly options

Connection point


**F** – fixed point  
**M** – driver

Connection surface

**I** – connection surface inside  
**A** – connection surface outside

Connection type

**A** – threaded joint outside (standard)  
**I** – threaded joint inside  
**F** – flange connection



Order example



Plastic/steel	F	A	A
UMB	M	U	
End connector	Connection point	Connection type	Connection surface



We recommend the use of strain reliefs at the driver and fixed point. See from p. 926.



# M1300



**Pitch**  
130 mm



**Inner height**  
87 – 98 mm




**Inner widths**  
100 – 800 mm



**Bending radii**  
150 – 500 mm


## Stay variants



**Aluminum stay RMF** ..... page 458

### Frame stay solid with optional fixing profile


- » Aluminum profile bars for heavy loads and large cable carrier widths. Easy threaded connection.
- » **Inside/outside:** Threaded joint easy to release.



**Aluminum stay RMS** ..... page 460

### Frame stay solid with ball joint

- » Aluminum profile bars with plastic ball joint for heavy loads and large cable carrier widths. Assembly without screws.
- » **Inside/outside:** Swivable and detachable.




**Aluminum stay LG** ..... page 462

### Hole stay, split version

- » Optimum cable routing in the neutral bending line. Split version for easy cable routing. Stays also available unsplit.
- » **Outside/inside:** Screw-fixing easy to release.



Unsupported arrangement

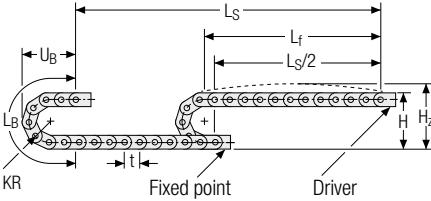


**Load diagram for unsupported length** depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight  $q_k = 8.0 \text{ kg/m}$ . For other inner widths, the maximum additional load changes.

KR [mm]	H [mm]	H <sub>z</sub> [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
150	480	540	732	340
195	570	630	873	385
240	660	720	1014	430
280	740	800	1140	470
320	820	880	1266	510
360	900	960	1391	550
400	980	1040	1517	590
500	1180	1240	1831	690

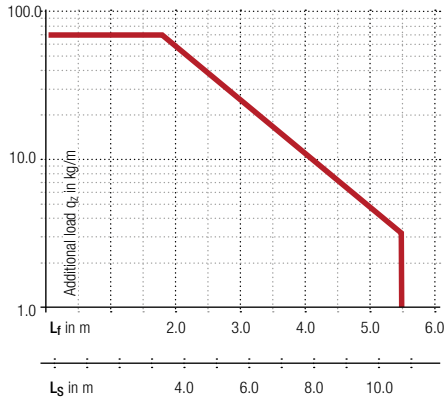

**Speed**  
up to 10 m/s



**Acceleration**  
up to 25 m/s<sup>2</sup>




**Travel length**  
up to 10.8 m



**Additional load**  
up to 70 kg/m

Gliding arrangement | GO module with chain links optimized for gliding

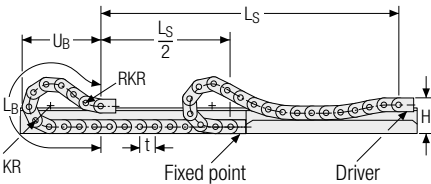

KR [mm]	H [mm]	GO module RKR [mm]	L <sub>B</sub> [mm]	U <sub>B</sub> [mm]
195	360	500	2210	1040
240	360	500	2470	1125
320	360	500	2880	1240
360	360	500	3140	1331
500	360	500	4310	1756

The cable carrier is to be used gliding only **without pre-tensioning!**



**Speed**  
up to 8 m/s



**Acceleration**  
up to 20 m/s<sup>2</sup>



**Travel length**  
up to 350 m



**Additional load**  
up to 70 kg/m



The gliding cable carrier must be guided in a channel. See p. 866.

The GO module mounted on the driver is a defined sequence of 4 adapted KR/RKR link plates.

Glide shoes are required for gliding applications.



Our technical support can provide help for gliding arrangements:  
[technik@kabelschlepp.de](mailto:technik@kabelschlepp.de)

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series


TKA  
series

UAT  
series



Aluminum stay RMF –  
frame stay solid  
with optional fixing profile

- Aluminum profile bars for heavy loads and large cable carrier widths. Easy threaded connection.
- Available customized in **1 mm grid**.
- **Inside/outside:** Threaded joint easy to release.

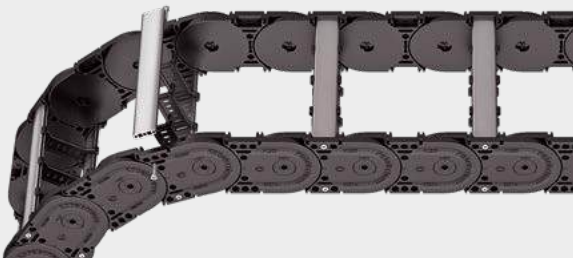


Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 100 – 800 mm  
in **1 mm** width sections

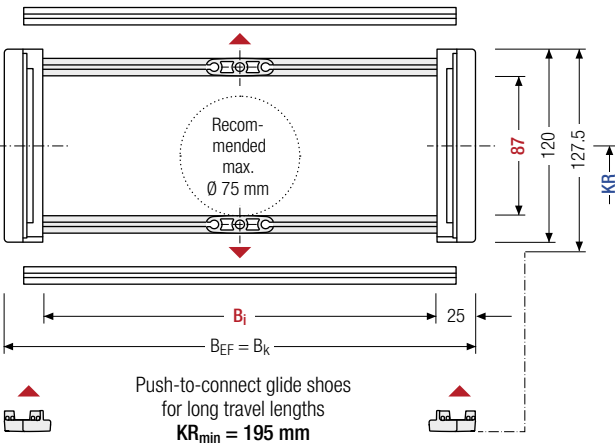

The maximum cable diam-  
eter strongly depends on  
the bending radius and the  
desired cable type.  
Please contact us.

Calculating the  
cable carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G</sub> <sup>+</sup> [mm]	B <sub>i</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]				q <sub>k</sub> [kg/m]
87	120	127.5	100 – 800	B <sub>i</sub> + 50	B <sub>i</sub> + 50	150 320	195 360	240 400	280 500	6.24 – 9.59

\* in 1 mm width sections

Order example



MC1300

Type

400

B<sub>i</sub> [mm]

RMF

Stay variant

360

KR [mm]

6500

L<sub>k</sub> [mm]

HS

Stay arrangement









## Aluminum stay RMS – frame stay reinforced

- Aluminum profile bars with plastic ball joint for heavy loads and large cable carrier widths. Assembly without screws.
- Available customized in **1 mm grid**.
- **Inside/outside:** Swivable and detachable.

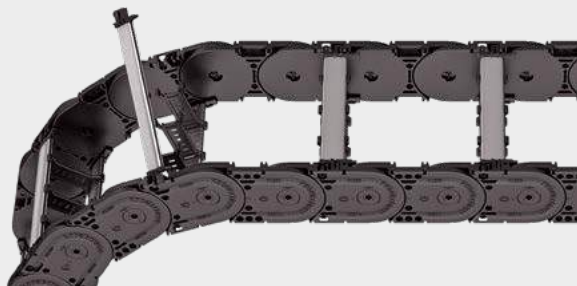


Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 100 – 800 mm  
in **1 mm** width sections

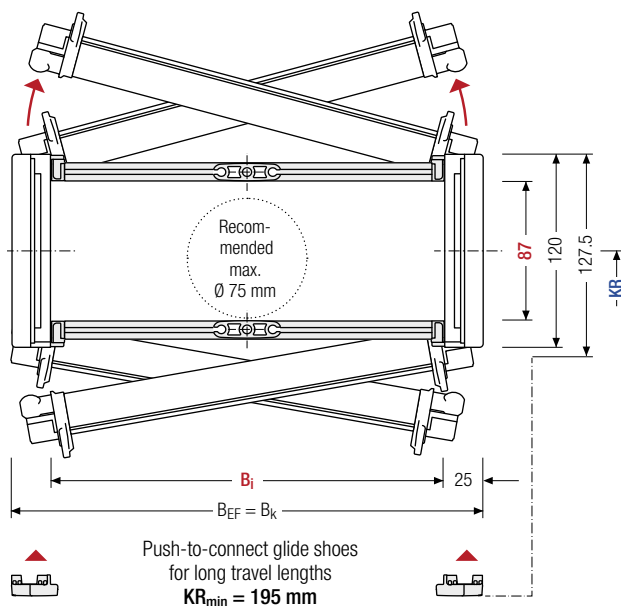

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

### Calculating the cable carrier length

#### Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

h <sub>i</sub> [mm]	h <sub>G</sub> [mm]	h <sub>G</sub> <sup>*</sup> [mm]	B <sub>i</sub> [mm]*	B <sub>k</sub> [mm]	B <sub>EF</sub> [mm]	KR [mm]				q <sub>k</sub> [kg/m]
87	120	127.5	100 – 800	B <sub>i</sub> + 50	B <sub>i</sub> + 50	150	195	240	280	6.31 – 9.65
						320	360	400	500	

\* in 1 mm width sections

### Order example



MC1300

Type

400

B<sub>i</sub> [mm]

RMS

Stay variant

360

KR [mm]

6500

L<sub>k</sub> [mm]

HS

Stay arrangement



Divider systems


As a standard, the divider system is mounted on each crossbar – for stay mounting on every 2<sup>nd</sup> chain link (HS). As a standard, dividers and the complete divider system (dividers with height separations) can be moved in the cross section (**version A**).

For applications with lateral acceleration and lying on the side, the dividers can be attached by a fixing profile, available as an accessory (**version B**). The fixing profile must be installed at the factory.

Divider system TS0 without height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	15.5	15	10	–	–
B	18.5	15	10	5	–


The dividers can be moved within the cross section (version A) or fixed (version B).

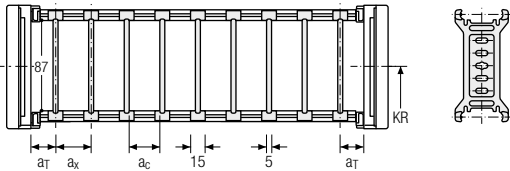

Divider system TS1 with continuous height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>T</sub> max [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	a <sub>x</sub> grid [mm]	n <sub>T</sub> min
A	15.5	25	15	10	–	2
B	18.5	25	15	10	5	2

The dividers can be moved within the cross section (version A) or fixed (version B).


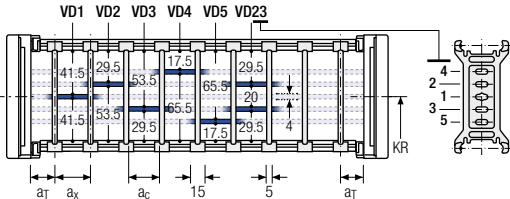


Divider system TS3 with partial height separation

Vers.	a <sub>T</sub> min [mm]	a <sub>x</sub> min [mm]	a <sub>c</sub> min [mm]	n <sub>T</sub> min
A	15.5	16/42*	8	2

\* For aluminum partitions

With grid distribution (1 mm grid). The dividers are attached by the height separation, the grid can be moved in the cross section.

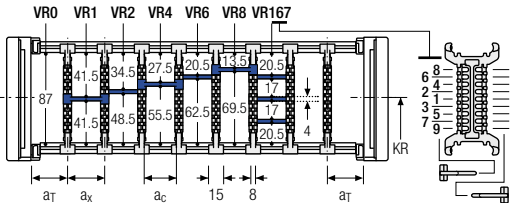

Aluminum partitions in 1 mm increments with a<sub>x</sub> > 42 mm are also available.

a <sub>x</sub> (center distance of dividers) [mm]											
a <sub>c</sub> (nominal width of inner chamber) [mm]											
16	18	23	28	32	33	38	43	48	58	64	68
8	10	15	20	24	25	30	35	40	50	56	60
78	80	88	96	112	128	144	160	176	192	208	
70	72	80	88	104	120	136	152	168	184	200	

When using **plastic partitions with a<sub>x</sub> > 112 mm**, we recommend an additional center support with a **twin divider** (S<sub>T</sub> = 5 mm). Twin dividers are also suitable for retrofitting in the partition system. The height separations VR8 and VR9 are not possible when using twin dividers.

PROTUM®  
series

K  
series

UNIFLEX  
Advanced  
series

M  
series

TKIP  
series

XL  
series

QUANTUM®  
series

TKR  
series


TKA  
series

UAT  
series



Aluminum stay LG –  
Hole stay, split version

- Optimum cable routing in the neutral bending line.  
Split version for easy cable routing. Stays also available unsplit.
- Available customized in **1 mm width sections**.
- **Outside/inside:** Screw-fixing easy to release.

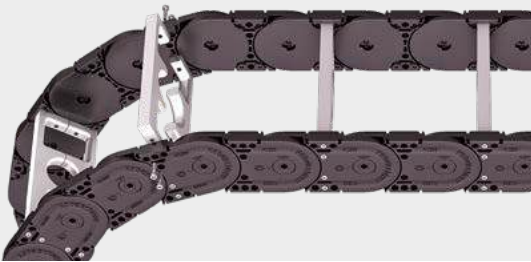


Stay arrangement on every  
2<sup>nd</sup> chain link, **standard**  
(HS: half-stayed)



Stay arrangement on each  
chain link (**VS: fully-stayed**)



**1 mm** B<sub>i</sub> 100 – 800 mm  
in **1 mm width sections**

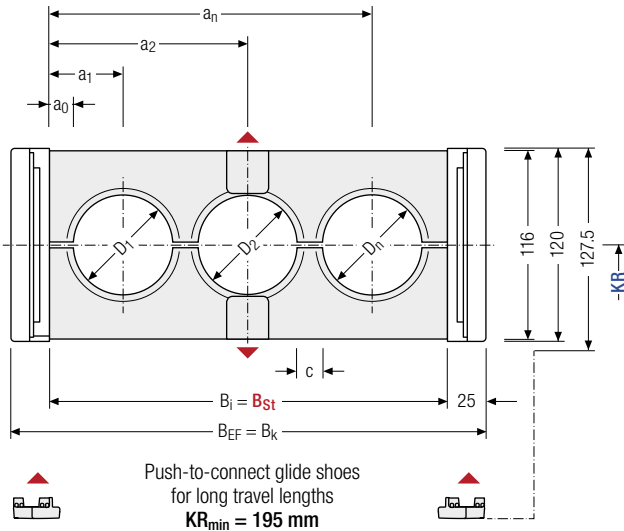

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable  
carrier length

Cable carrier length L<sub>k</sub>

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L<sub>k</sub>  
rounded to pitch t

Calculating  
the stay width

Stay width B<sub>St</sub>

$$B_{St} = \sum D + \sum c + 2 a_0$$

D <sub>max</sub> [mm]	D <sub>min</sub> [mm]	h <sub>G</sub> [mm]	B <sub>i</sub> [mm]	B <sub>St</sub> [mm]*	B <sub>K</sub> [mm]	B <sub>EF</sub> [mm]	c <sub>min</sub> [mm]	a <sub>0</sub> min [mm]	KR [mm]		q <sub>k</sub> 50 %** [kg/m]	
98	12	120	100 – 800	100 – 800	B <sub>St</sub> + 50	B <sub>St</sub> + 50	4	13	150	195	7.04	
									280	320		240
									400	500		360
											13.53	

\* in 1 mm width sections

\*\* Hole ratio of the hole stay approx. 50 %

Order example





**MC1300** Type · **400** B<sub>i</sub> [mm] · **LG** Stay variant · **360** KR [mm] · **6500** L<sub>k</sub> [mm] · **HS** Stay arrangement





Universal end connectors UMB – plastic (standard)

The universal mounting brackets (UMB) are made from plastic and can be mounted **from the top, from the bottom, face on or from the side.**



▲ Assembly options

 Recommended tightening torque: 54 Nm for cheese-head screws ISO 4762 - M10 - 8.8



Connection point

**F** – fixed point  
**M** – driver

Connection type

**U** – universal mounting bracket

Order example



UMB	F	A
UMB	M	A
End connector	Connection point	Connection type



We recommend the use of strain reliefs at the driver and fixed point. See from p. 926.

More product information online



Assembly instructions etc.: Additional info via your smartphone or check online at [tsubaki-kabelschlepp.com/downloads](http://tsubaki-kabelschlepp.com/downloads)



Configure your custom cable carrier here: [online-engineer.de](http://online-engineer.de)

PROTUM® series

K series

UNIFLEX Advanced series

M series

TKUP series

XL series

QUANTUM® series

TKR series

TKA series

UAT series